
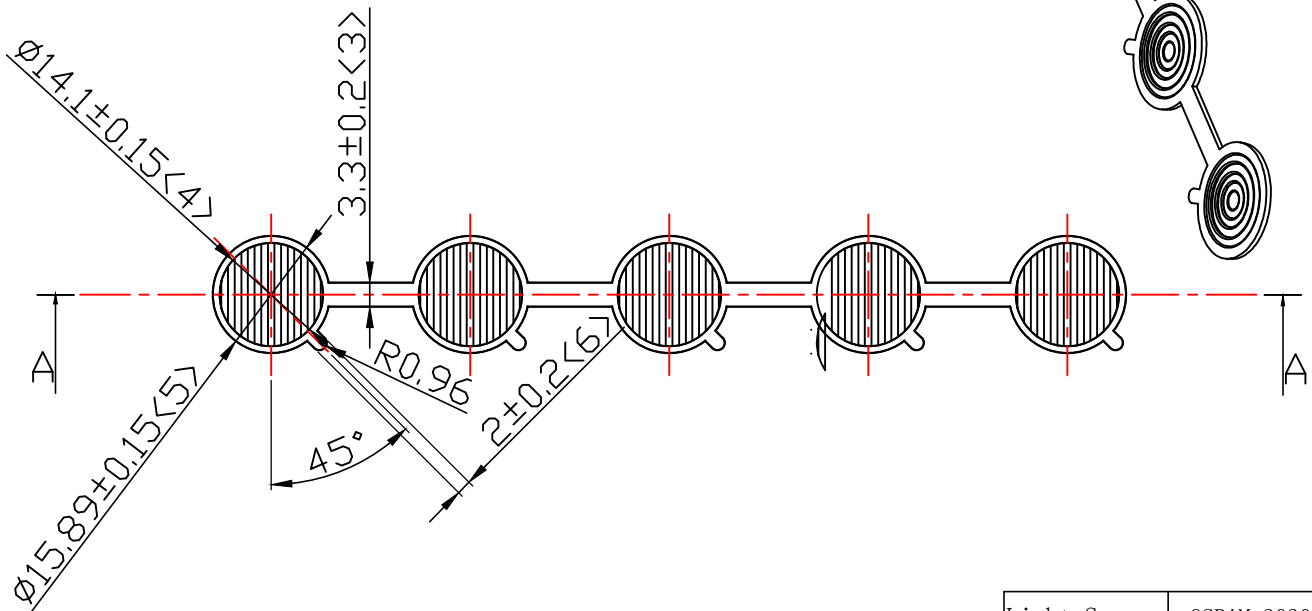
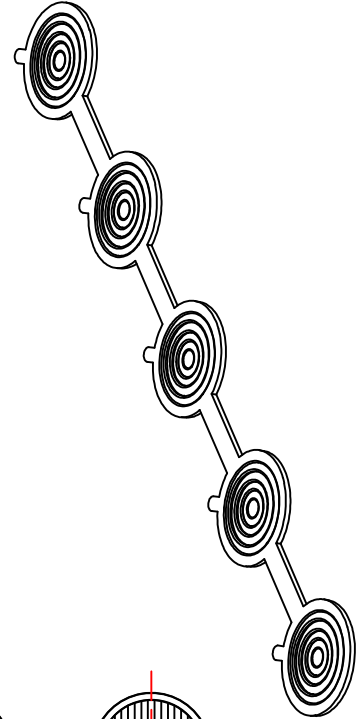


table for unmentioned tolerance in the drawing (unit: mm)			punch angle tolerance in the drawing (unit:degree)		
0-5	5-30	30-120	0-10	10-50	50-120
±0.15	±0.2	±0.5	±1°	±0.5°	±0.3°
120-250	250-400	400-700	120-250	250-360	360 above
±0.8	±1.5	±2	±0.2°	±0.166°	±0.083°

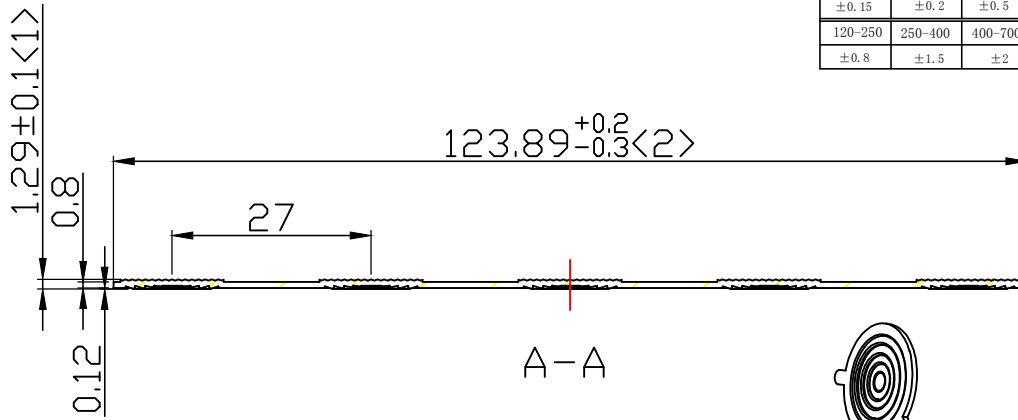

技术要求:

- 1.材质: PC。
- 2.表面处理: 无。
- 3.产品未注公差参考未注公差表。

Light Source	OSRAM-3030
PlasticHolder	
Metal Adaptor	
Design Angle	22±3° × 44±5°
Measured Angle	
Efficiency	

				Material:PC		Nata® 广东日大照明有限公司	
						Customer Item	
						Customer Code	NT
						Product Number	92. 70. 327. 00
						Product Name	五合一-PC防尘板 L123.9W15.8H1.3
△	1			Signature	Amended Date		
Mark	Amended Times	Amended Content		Client Version			
Controll Version	A0	Design Version	K0	Proportion	1:1		
Designer	区工	Drawing by		View			
Technology		Auditor		Page	Total Page		
Approval		Date	2021. 07. 08	Page	Total Page		