





NATA LIGHTING CO.,LTD.
www.nata.cn
Email:info@nata.com
Tel:+86-750-3770000 Fax:+86-750-3771111
Address:380JinOu Road,GaoXin Zone,Jiang Men City,Guangdong,China

Nata

LumCAT: 1-0926-M
Luminaire: 99.02.73.174+92.76.853.00
Report No: 200908-B012 Voltage(V): 37.3000
Test No: 200908-C012 Current(A): 0.3020
LampCAT: LUMILEDS LUXEON CoB 1202s Power (W): 11.2640
Lamp flux(lm): 1242.0 PF: 0.0000
Number of Lamps: 1 Ballast type: DC
Length(mm): 0 Width(mm): 0
Phm Type: C Height(mm): 0

Photometric Results

Lumens(lm): 1006.20
Efficiency(%): 81.01%
Lumens(lm)/Power(W): 89.33
Central intensity(cd): 10421.440
Maximum intensity(cd): 10421.440
Angle of maximum intensity: C=0.0 γ =0.0
Beam Angle(50%Imax): [C0/180]Total=13.6
 [C90/270]Total=13.6
Field angle(10%Imax): [C0/180]Total=33.5
 [C90/270]Total=33.5
Maximum s/h(1/2): C0_180=0.23 C90_270=0.23
Maximum s/h(1/4): C0_180=0.27 C90_270=0.27
Up flux rate of lamp(%): 0.00%
Down flux rate of lamp(%): 81.01%
Up flux rate of LUM(%): - -
Down flux rate of LUM(%): 100.00%
CIE Type : Direct lighting
Output flux ratio in π solid angle : 98.599%

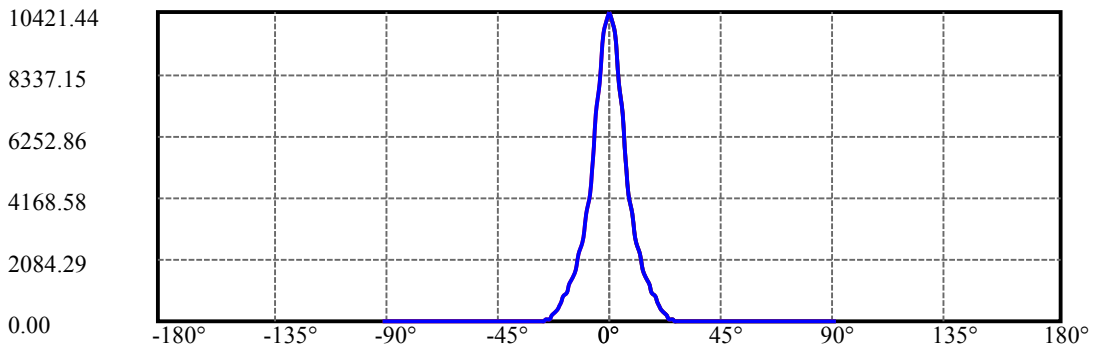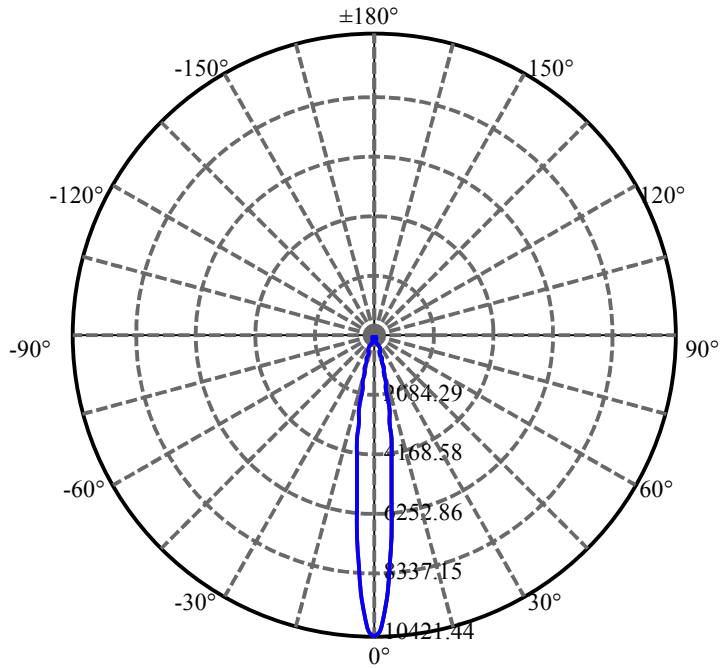

C0(Max): —————
C0/C180: —————
C90/C270: —————

Field angle(10%Imax):C0/180Left:16.8 Right:16.8
:C90/270Left:16.8 Right:16.8

Beam Angle(50%Imax):C0/180Left:6.8 Right:6.8
:C90/270Left:6.8 Right:6.8