



NATA LIGHTING CO.,LTD
www.nata.cn
Email:info@nata.cn
Tel:+86 0750-377 0000(10 lines) Fax:+86 0750-377 1111
Address:380JinOu Road,Gaoxin Zone,Jiang Men City,Guangdong,China

Nata

Client: NT

LumCAT: 1-1704-LM

Luminaire: 92.70.121.00

Report No: 20251030-B006

Ballast type: DC

Test No: 20251030-C006

Voltage(V): 34.540

LampCAT: LUMINUS CXM-11(TC) LES11

Current(A): 0.448

Lamp flux(lm): 2136.0

Power (W): 15.470

Number of Lamps: 1

PF: 0.000

Length(mm): 50

Width(mm): 50

Phm Type: C

Height(mm): 22

Photometric Results

Lumens(lm): 2046.07, Efficiency(%): 95.79% , Luminous Efficacy(lm/W): 132.26

Central intensity(cd): 4906.466, Maximum intensity(cd): 4906.466

Angle of maximum intensity: C=0.0 γ =0.0

Beam Angle(50%Imax): [C0/180]Total=27.0

[C90/270]Total=27.0

Field angle(10%Imax): [C0/180]Total=77.8

[C90/270]Total=77.8

Maximum s/h(1/2): C0_180=0.45 C90_270=0.45

Maximum s/h(1/4): C0_180=0.49 C90_270=0.49

Up flux rate of lamp(%): 0.00%


Down flux rate of lamp(%): 95.79%


Up flux rate of LUM(%): - -


Down flux rate of LUM(%): 100.00%

CIE Type : Direct lighting

Output flux ratio in π solid angle : 98.971%

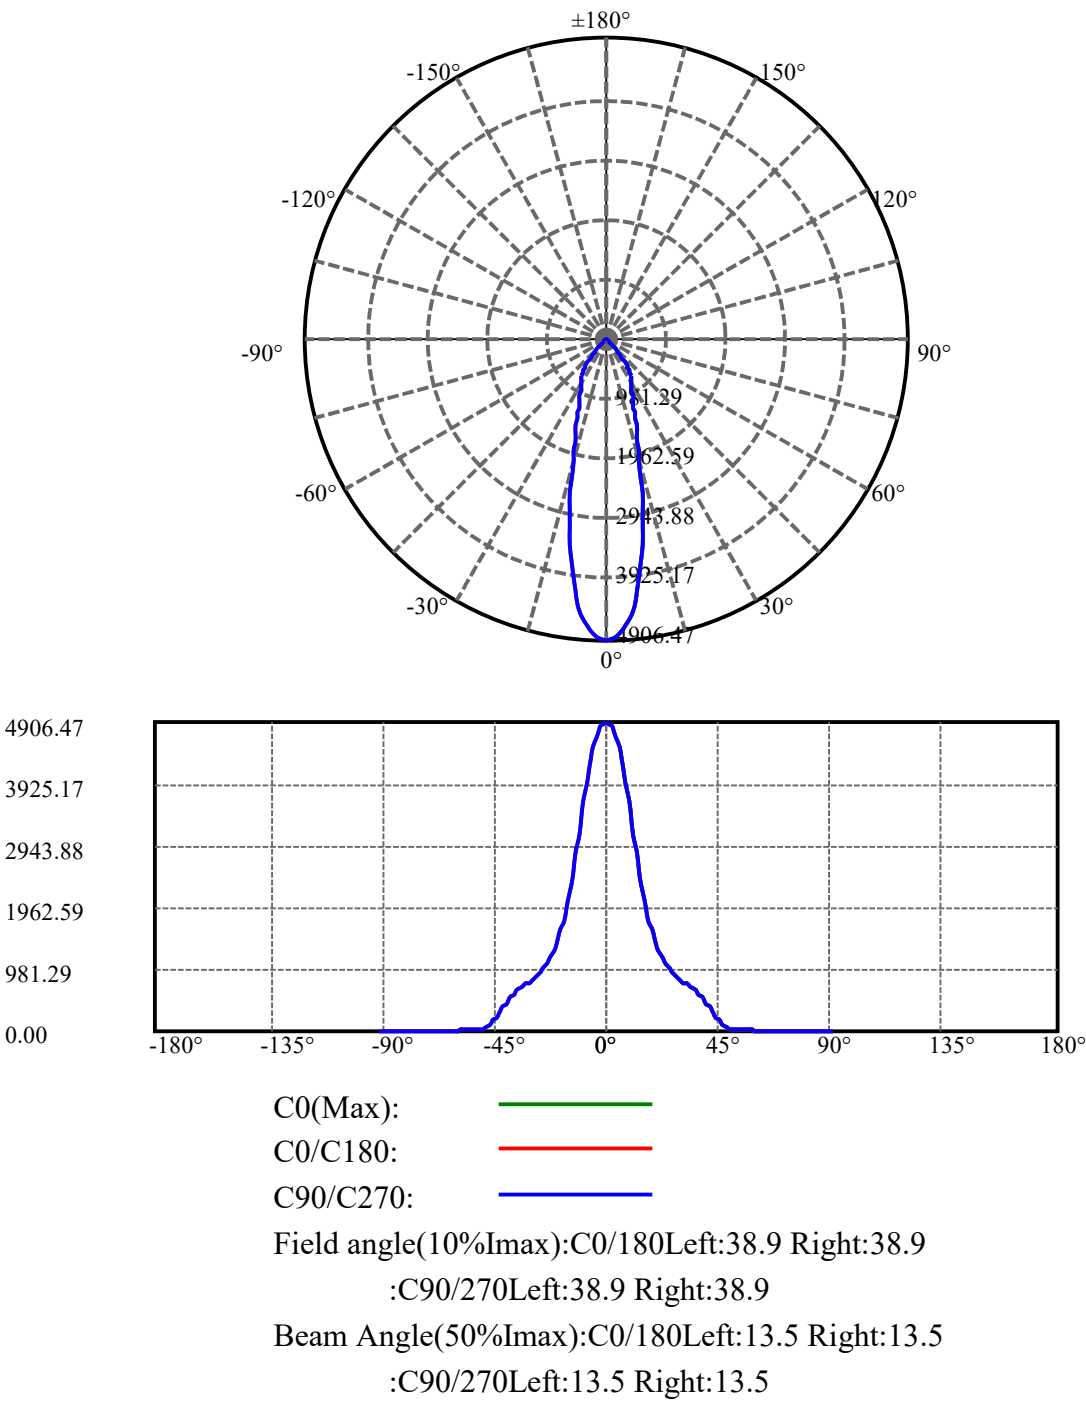

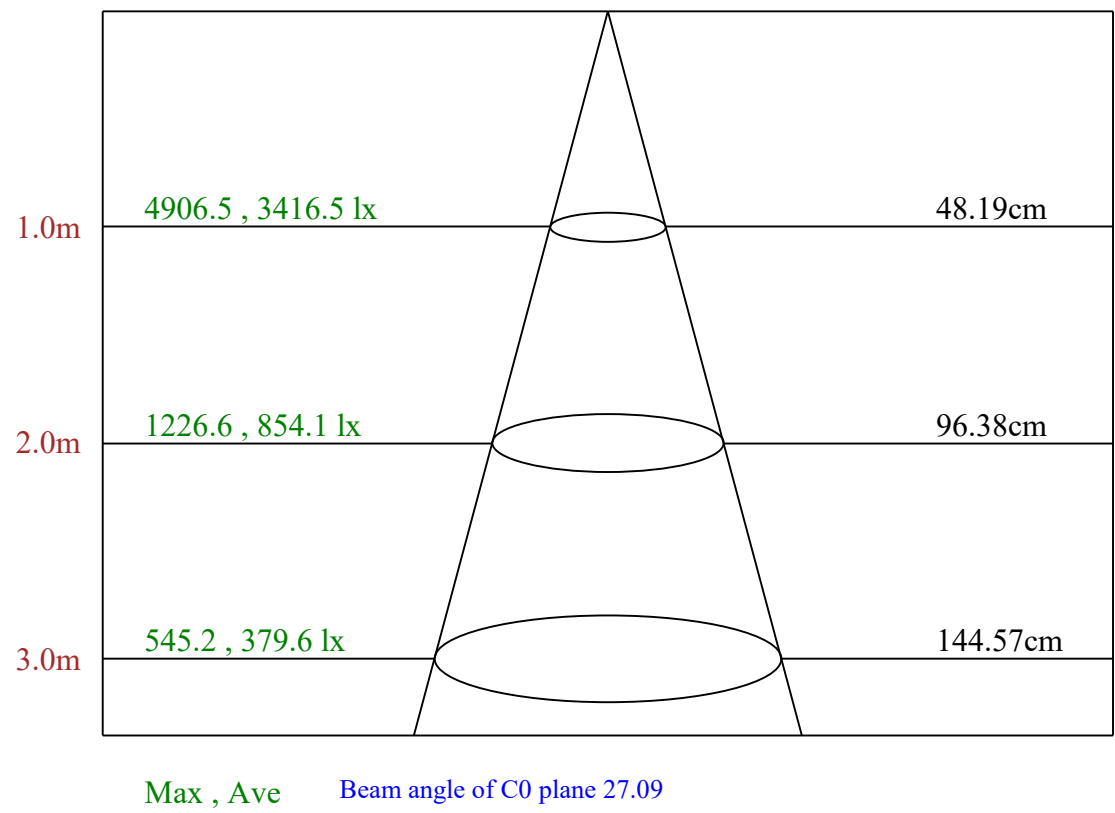

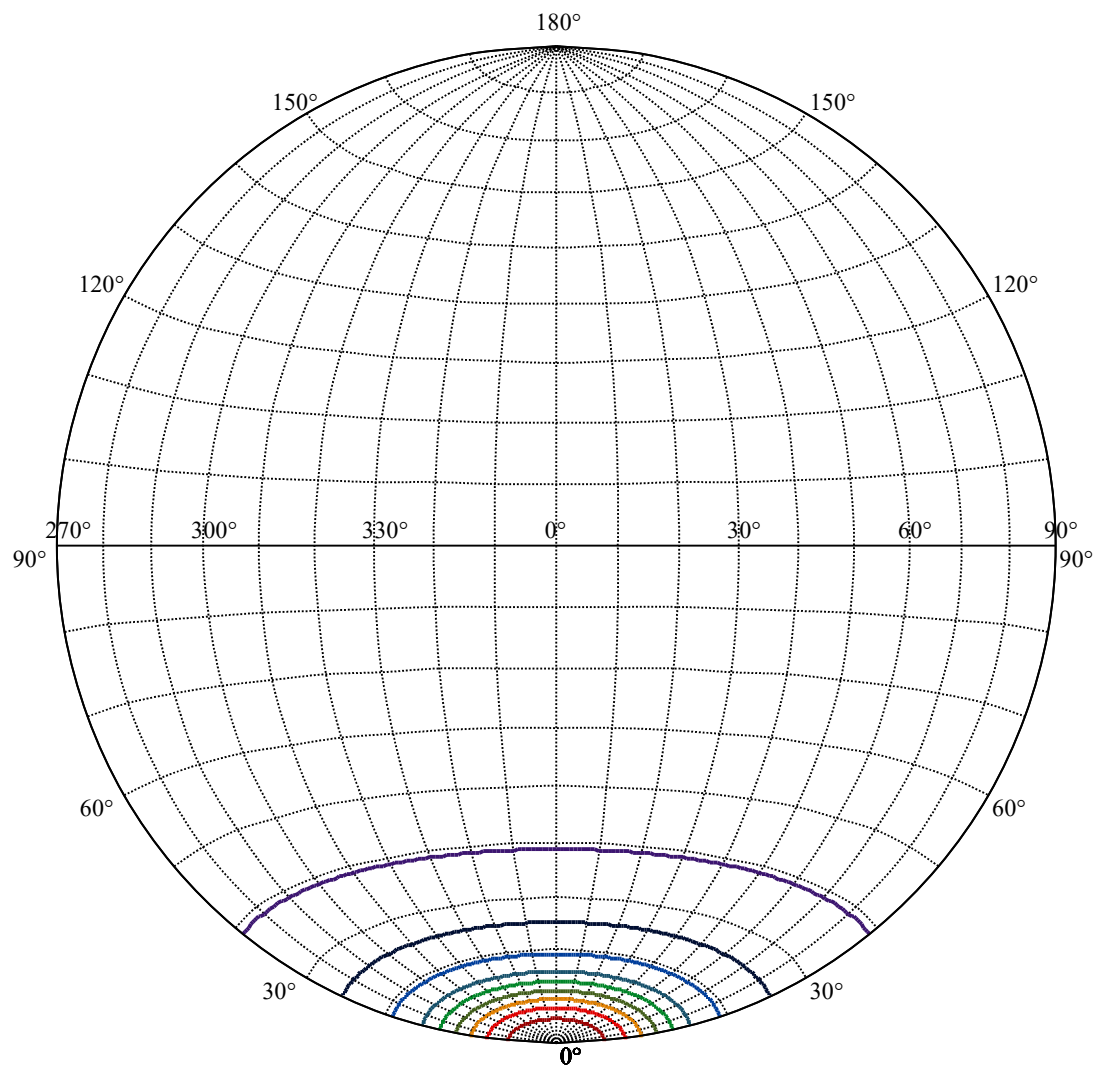


House


[Unit:cd]

Road

Imax:4906.47	
(10%Imax) 490.647	
(20%Imax) 981.293	
(30%Imax) 1471.94	
(40%Imax) 1962.59	
(50%Imax) 2453.23	
(60%Imax) 2943.88	
(70%Imax) 3434.53	
(80%Imax) 3925.17	
(90%Imax) 4415.82	

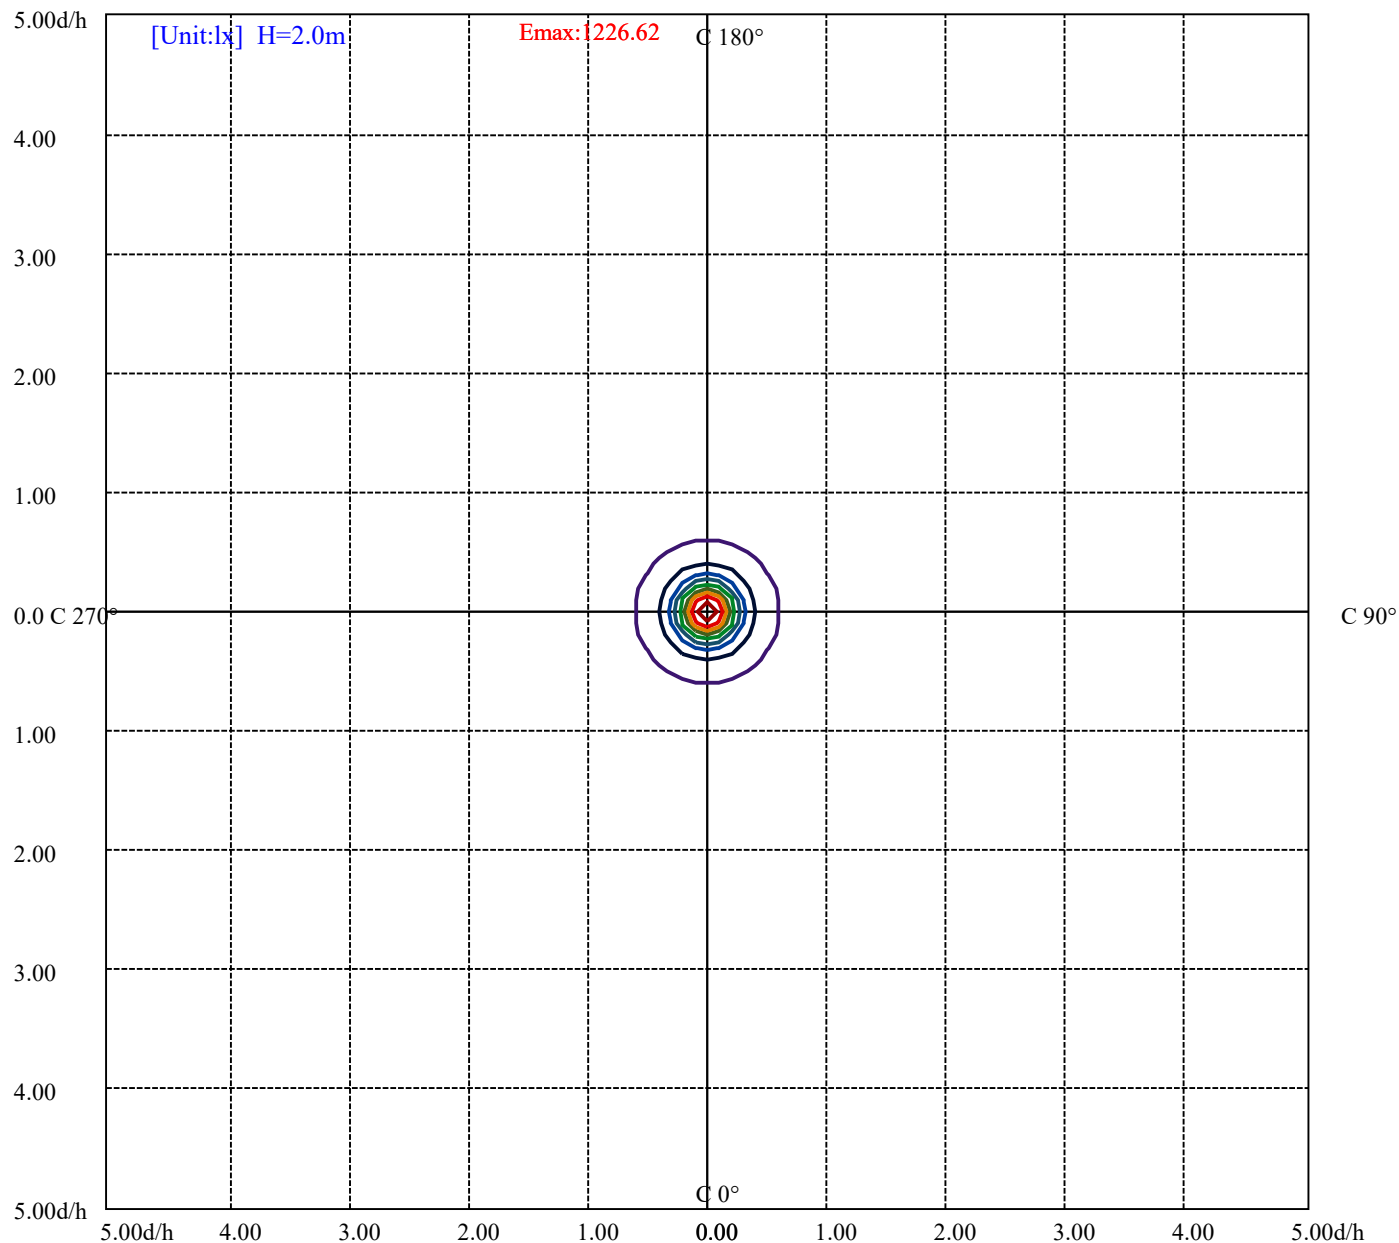

(10%Emax)	122.6615	—
(20%Emax)	245.3233	—
(30%Emax)	367.985	—
(40%Emax)	490.6475	—
(50%Emax)	613.3075	—
(60%Emax)	735.97	—
(70%Emax)	858.63	—
(80%Emax)	981.2925	—
(90%Emax)	1103.955	—

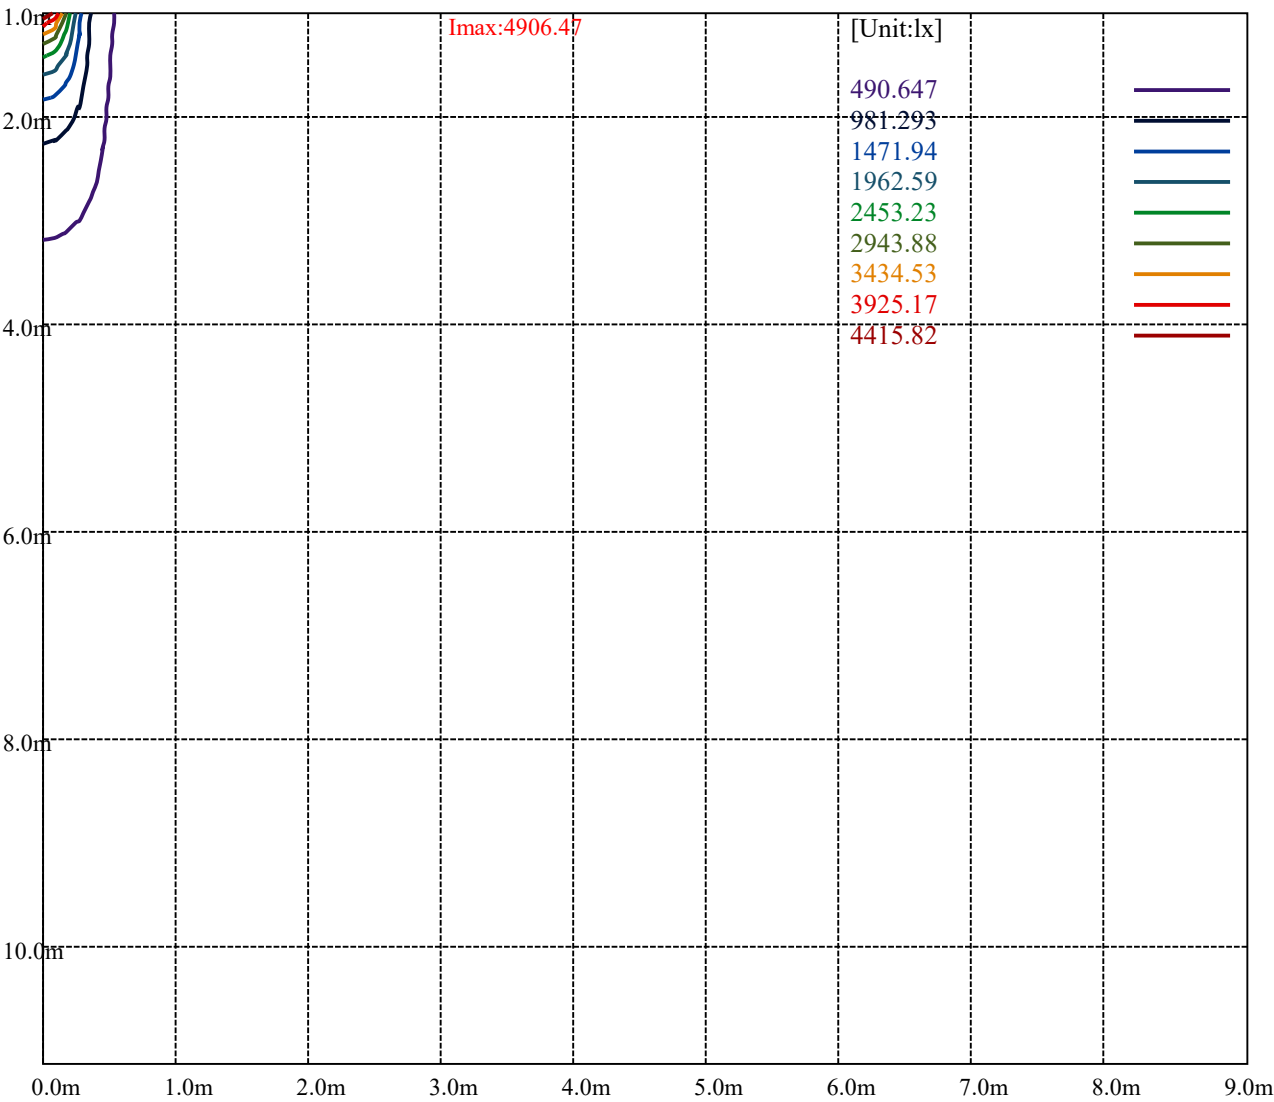

Luminance Table


γ	45	50	55	60	65	70	75	80	85
C0	67192	14313	9483	6236	4755	3796	3318	3434	3564
C45	59643	12528	8176	5289	3959	3094	2639	2650	2649
C90	67192	14313	9483	6236	4755	3796	3318	3434	3564

L(Hor)(65)	L(Ver)(65)	L45(65)	L(Hor)(75)	L(Ver)(75)	L45(75)	L(Hor)(85)	L(Ver)(85)	L45(85)
9241	9241	9241	8768	8768	8768	21491	21491	21491

Glare Table


Glare	Quality	Service Values Illuminance(lx)							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
		a	b	c	d	e	f	g	h

Luminance Limiting Curve

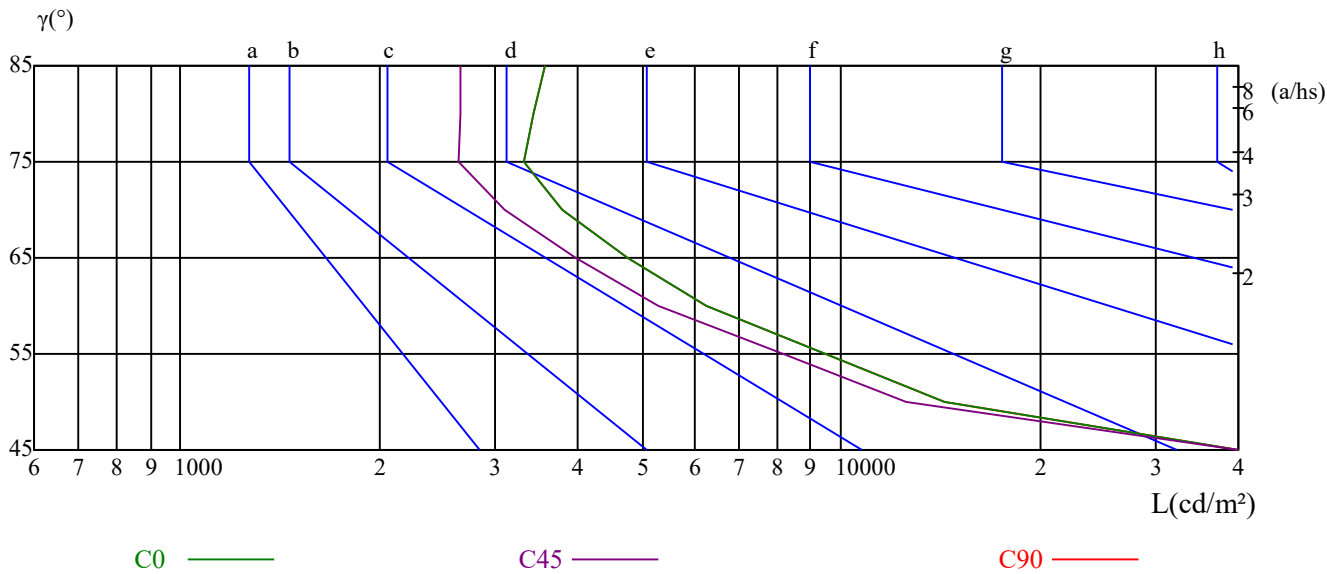


Illumination assessment according UGR											
Rf of Ceiling	70	70	50	50	30	70	70	50	50	30	
Rf of Wall	50	30	50	30	30	50	30	50	30	30	
Rf of Floor	20	20	20	20	20	20	20	20	20	20	
Room dimensions		Viewed crosswise					Viewed endwise				
X	Y										
2H	2H	22.99	24.00	23.36	24.31	24.63	22.47	23.48	22.84	23.79	24.11
	3H	22.81	23.70	23.20	24.04	24.39	22.30	23.19	22.68	23.53	23.87
	4H	22.72	23.54	23.12	23.90	24.27	22.21	23.03	22.61	23.39	23.76
	6H	22.65	23.40	23.07	23.78	24.18	22.14	22.90	22.56	23.27	23.67
	8H	22.58	23.30	23.01	23.69	24.10	22.08	22.80	22.50	23.19	23.59
	12H	22.53	23.21	22.95	23.60	24.02	22.03	22.71	22.45	23.10	23.52
4H	2H	22.71	23.53	23.11	23.89	24.25	22.19	23.01	22.59	23.37	23.74
	3H	22.50	23.18	22.92	23.58	24.00	21.99	22.67	22.41	23.07	23.49
	4H	22.44	23.03	22.88	23.46	23.90	21.94	22.53	22.38	22.95	23.40
	6H	22.33	22.85	22.80	23.30	23.75	21.83	22.35	22.30	22.81	23.26
	8H	22.29	22.77	22.77	23.23	23.70	21.80	22.28	22.28	22.74	23.21
	12H	22.26	22.70	22.75	23.16	23.68	21.77	22.22	22.26	22.67	23.19
8H	4H	22.25	22.73	22.74	23.19	23.67	21.75	22.23	22.23	22.69	23.16
	6H	22.13	22.53	22.64	23.01	23.52	21.64	22.04	22.15	22.52	23.03
	8H	22.15	22.48	22.68	23.00	23.50	21.66	22.00	22.20	22.52	23.02
	12H	22.13	22.39	22.67	22.91	23.43	21.65	21.92	22.20	22.43	22.95
12H	4H	22.20	22.65	22.69	23.10	23.62	21.70	22.14	22.19	22.60	23.12
	6H	22.12	22.46	22.65	22.98	23.48	21.63	21.97	22.17	22.49	22.99
	8H	22.10	22.36	22.64	22.88	23.40	21.62	21.88	22.16	22.40	22.92
Variation with the observer position at spacings:											
S = 1.0H		3.4/-10.6					3.4/-10.6				
S = 1.5H		6.0/-10.9					6.0/-10.9				
S = 2.0H		8.0/-10.3					8.0/-10.3				
Standard tables:		BK0					BK0				
Uncorrected UGR		3.3					3.3				

UGR calculation is based on CIE Publ. 117 ,S/H = 0.25

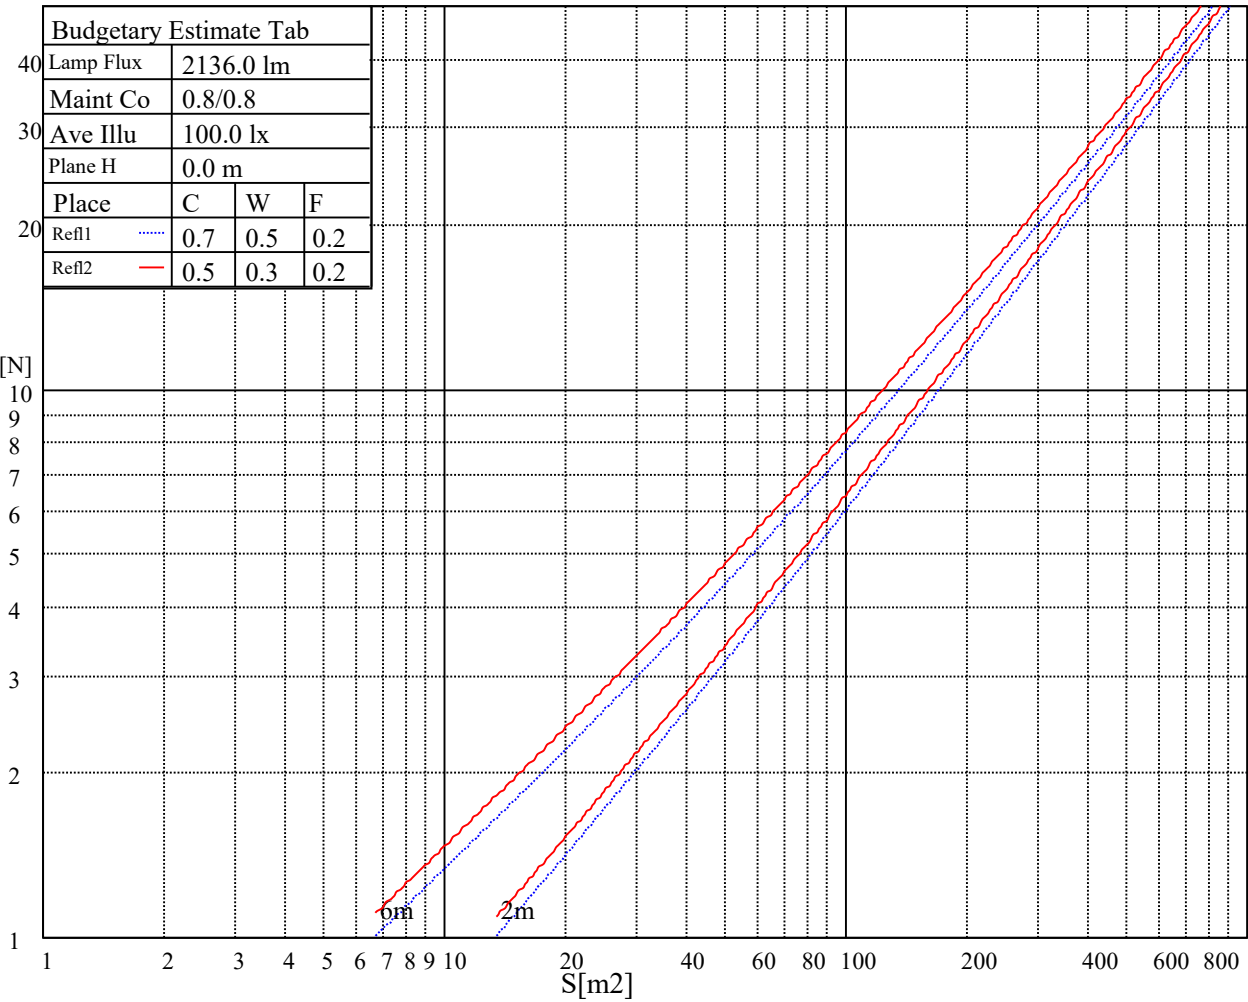

RHOCC	80			70			50			30			10			0
RHOW	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	COEFFCIENTS OF UTILIZATION RHOFC=20 CU															
0	1.14	1.14	1.14	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	0.98	0.98	0.98	0.96
1	1.06	1.04	1.02	1.04	1.02	1.00	1.00	0.99	0.97	0.97	0.96	0.94	0.94	0.93	0.92	0.90
2	0.99	0.96	0.92	0.98	0.94	0.91	0.95	0.92	0.89	0.92	0.90	0.88	0.89	0.87	0.86	0.84
3	0.93	0.88	0.85	0.92	0.88	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.85	0.82	0.80	0.79
4	0.87	0.82	0.79	0.86	0.82	0.78	0.84	0.80	0.77	0.82	0.79	0.76	0.81	0.78	0.75	0.74
5	0.82	0.77	0.73	0.82	0.77	0.73	0.80	0.76	0.72	0.78	0.75	0.72	0.77	0.74	0.71	0.70
6	0.78	0.72	0.69	0.77	0.72	0.68	0.76	0.71	0.68	0.74	0.70	0.67	0.73	0.70	0.67	0.66
7	0.74	0.68	0.65	0.73	0.68	0.64	0.72	0.67	0.64	0.71	0.67	0.64	0.70	0.66	0.63	0.62
8	0.70	0.65	0.61	0.70	0.64	0.61	0.68	0.64	0.61	0.68	0.63	0.60	0.67	0.63	0.60	0.59
9	0.67	0.61	0.58	0.66	0.61	0.58	0.65	0.61	0.58	0.65	0.60	0.57	0.64	0.60	0.57	0.56
10	0.64	0.58	0.55	0.63	0.58	0.55	0.62	0.58	0.55	0.62	0.58	0.55	0.61	0.57	0.54	0.53

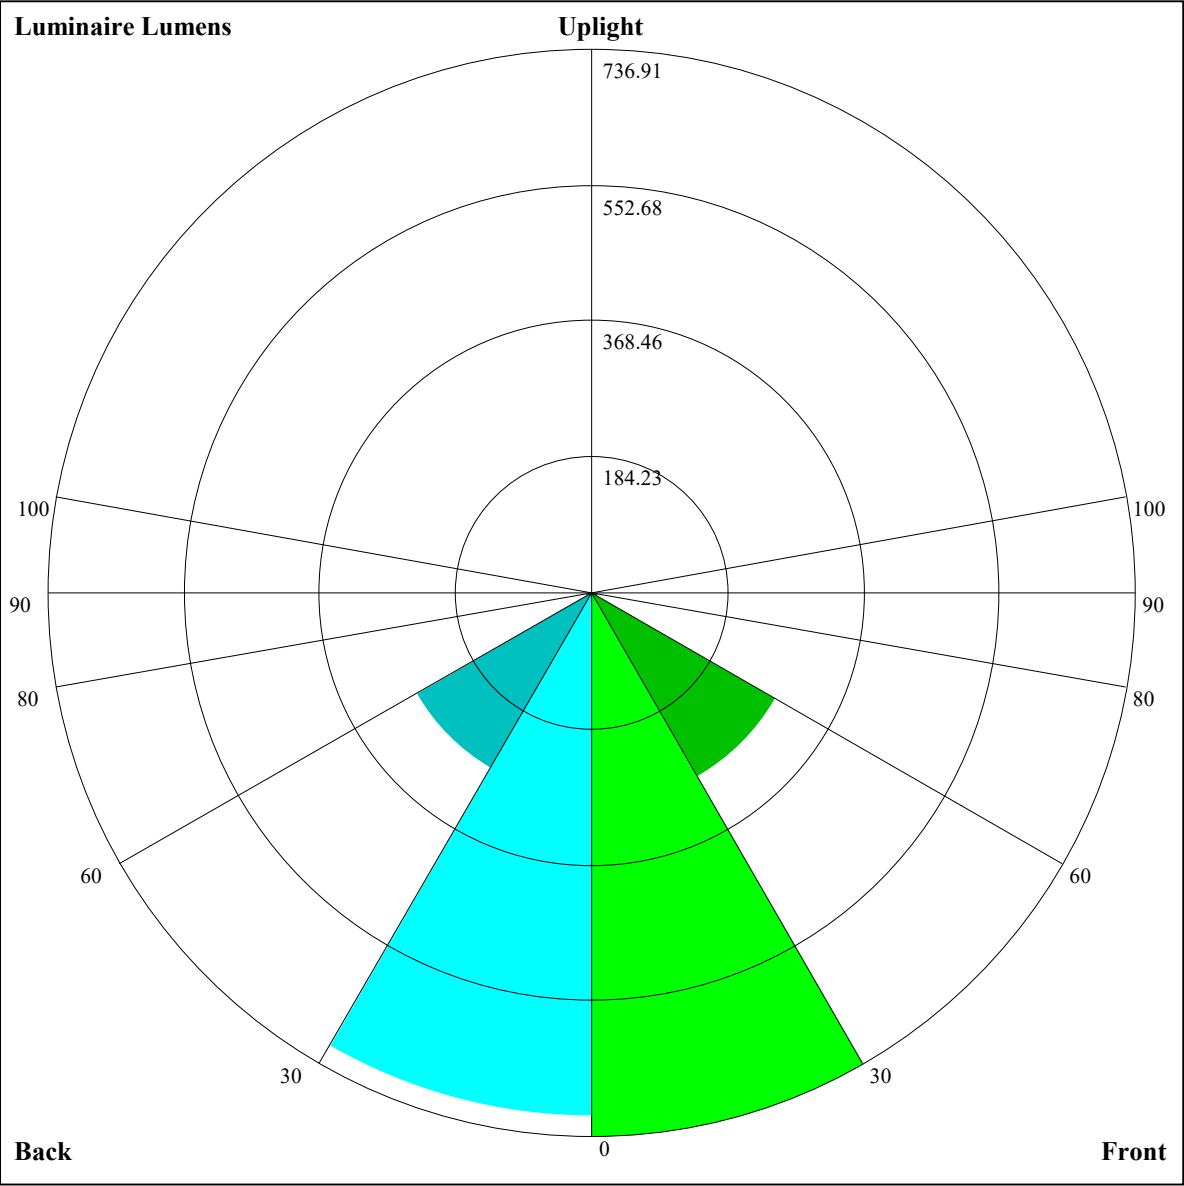

Luminaire Lumens:

FL=736.91,FM=288.6,FH=7.95,FVH=2.51

BL=710.25,BM=273.83,BH=8.34,BVH=2.54

UL=0,UH=0

BUG Rating:B2-U0-G0

Intensity data(cd)

C/ γ (°)	0.0	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0
0.0	4911.42	4910.56	4866.64	4807.22	4721.10	4572.97	4426.57	4255.20	4058.85
45.0	4894.19	4907.11	4895.92	4845.11	4778.80	4689.23	4569.53	4384.37	4209.55
90.0	4901.95	4866.64	4785.69	4690.09	4563.50	4415.38	4193.19	3983.06	3747.96
135.0	4918.31	4903.67	4858.89	4783.10	4650.48	4509.25	4343.90	4097.60	3872.83
180.0	4911.42	4885.58	4814.97	4734.88	4595.36	4450.69	4288.78	4093.29	3821.16
225.0	4894.19	4842.52	4772.77	4679.76	4529.91	4380.07	4154.44	3951.20	3729.01
270.0	4901.95	4910.56	4890.75	4827.02	4743.49	4634.12	4457.57	4282.75	4081.24
315.0	4918.31	4895.92	4830.47	4750.38	4636.70	4491.16	4270.70	4056.26	3815.13
360.0	4911.42	4910.56	4866.64	4807.22	4721.10	4572.97	4426.57	4255.20	4058.85
C/ γ (°)	9.0	10.0	11.0	12.0	13.0	14.0	15.0	16.0	17.0
0.0	3776.38	3532.66	3275.17	3019.40	2711.95	2485.46	2226.25	2039.37	1695.93
45.0	4017.51	3806.52	3520.61	3284.64	2986.67	2755.87	2538.00	2289.97	2110.85
90.0	3436.21	3168.38	2831.66	2580.19	2345.95	2087.60	1704.54	1704.54	1603.70
135.0	3626.53	3363.01	3018.54	2745.54	2491.49	2255.53	1994.59	1813.74	1658.73
180.0	3580.03	3327.70	3067.62	2758.46	2522.49	2308.06	2114.29	1898.14	1748.29
225.0	3493.05	3189.91	2948.78	2717.12	2499.24	2249.50	2068.65	1715.82	1715.82
270.0	3792.74	3540.41	3274.31	2937.58	2677.51	2435.51	2213.33	1973.06	1805.99
315.0	3551.61	3203.69	2924.67	2655.98	2351.98	2134.96	1698.08	1698.08	1592.42
360.0	3776.38	3532.66	3275.17	3019.40	2711.95	2485.46	2226.25	2039.37	1695.93
C/ γ (°)	18.0	19.0	20.0	21.0	22.0	23.0	24.0	25.0	26.0
0.0	1695.93	1570.28	1458.76	1360.50	1252.51	1176.81	1109.20	1051.51	988.29
45.0	1950.67	1807.71	1649.25	1537.30	1437.40	1345.26	1244.50	1173.02	1111.01
90.0	1481.84	1348.96	1255.43	1175.95	1104.21	1025.41	970.98	924.22	872.12
135.0	1495.96	1385.73	1267.75	1188.52	1119.63	1059.34	995.61	950.83	910.36
180.0	1582.94	1469.27	1368.51	1260.86	1184.21	1117.04	1055.04	992.17	947.39
225.0	1585.01	1470.30	1371.69	1261.55	1186.80	1102.66	1044.19	993.29	947.73
270.0	1656.14	1522.66	1381.43	1284.11	1197.99	1104.99	1038.67	968.06	918.97
315.0	1464.44	1331.30	1239.42	1162.08	1095.60	1024.55	976.58	933.78	896.92
360.0	1695.93	1570.28	1458.76	1360.50	1252.51	1176.81	1109.20	1051.51	988.29
C/ γ (°)	27.0	28.0	29.0	30.0	31.0	32.0	33.0	34.0	35.0
0.0	943.00	903.47	869.80	829.15	802.37	770.42	747.94	726.41	693.94
45.0	1040.40	990.45	948.25	900.02	866.44	835.43	800.13	774.29	749.32
90.0	836.81	795.22	766.54	739.93	712.20	692.05	671.47	648.21	607.13
135.0	875.05	836.30	809.60	785.49	764.82	740.70	722.62	702.81	678.70
180.0	908.64	874.19	834.57	805.29	778.60	751.04	727.79	705.40	664.06
225.0	897.35	859.98	828.11	797.89	764.82	742.43	719.69	689.46	643.39
270.0	877.63	834.57	803.57	775.15	748.46	720.04	699.37	678.70	658.89
315.0	854.90	825.01	797.03	766.02	743.55	723.48	699.88	680.94	643.82
360.0	943.00	903.47	869.80	829.15	802.37	770.42	747.94	726.41	693.94
C/ γ (°)	36.0	37.0	38.0	39.0	40.0	41.0	42.0	43.0	44.0
0.0	657.17	615.23	568.12	506.29	456.17	405.36	354.12	289.96	241.13
45.0	717.45	669.23	622.72	573.63	507.32	453.07	440.15	440.15	278.85
90.0	569.33	526.36	480.28	421.55	377.11	330.78	271.70	227.87	184.90
135.0	645.97	596.89	549.52	501.30	451.35	437.57	376.25	281.26	230.80
180.0	625.31	583.11	524.55	474.60	436.71	436.71	303.31	254.48	205.74
225.0	600.42	543.92	496.73	445.58	380.21	328.28	277.90	227.78	169.91
270.0	621.00	581.39	539.19	484.93	438.43	438.43	327.51	283.50	237.95
315.0	607.48	565.37	518.78	474.25	412.51	364.63	312.18	265.33	204.45
360.0	657.17	615.23	568.12	506.29	456.17	405.36	354.12	289.96	241.13

Intensity data(cd)

C/ γ (°)	45.0	46.0	47.0	48.0	49.0	50.0	51.0	52.0	53.0
0.0	191.70	135.29	94.73	62.18	37.63	31.43	28.76	26.52	24.29
45.0	231.06	183.26	129.78	92.75	58.13	44.01	39.27	37.46	34.79
90.0	134.34	97.66	67.52	45.38	38.15	35.14	32.55	29.28	26.44
135.0	177.40	134.95	95.59	57.79	41.16	34.36	31.61	29.71	27.39
180.0	160.18	108.68	74.23	47.54	33.33	30.83	28.51	26.61	24.37
225.0	128.57	93.70	64.67	42.46	36.77	34.88	32.47	30.31	27.90
270.0	183.35	142.44	106.61	76.39	50.03	41.25	38.32	36.34	33.41
315.0	161.73	121.77	76.99	50.64	32.47	28.59	26.52	23.85	21.27
360.0	191.70	135.29	94.73	62.18	37.63	31.43	28.76	26.52	24.29
C/ γ (°)	54.0	55.0	56.0	57.0	58.0	59.0	60.0	61.0	62.0
0.0	21.87	18.86	16.53	14.47	13.00	12.06	11.37	10.68	9.90
45.0	32.04	29.45	26.52	23.08	20.75	19.12	17.83	16.28	15.16
90.0	23.77	21.19	18.34	16.53	14.81	13.78	12.75	11.63	10.85
135.0	24.03	21.27	18.95	16.36	15.16	14.12	13.00	11.88	11.02
180.0	21.62	19.55	17.65	16.19	15.33	14.55	13.87	13.18	12.40
225.0	24.97	22.74	20.50	19.29	18.26	17.22	15.85	14.73	13.69
270.0	30.74	28.07	24.63	22.22	19.89	18.26	16.88	15.59	14.30
315.0	18.69	16.02	13.18	11.37	10.16	9.21	8.35	7.66	7.15
360.0	21.87	18.86	16.53	14.47	13.00	12.06	11.37	10.68	9.90
C/ γ (°)	63.0	64.0	65.0	66.0	67.0	68.0	69.0	70.0	71.0
0.0	9.21	8.87	8.44	8.10	7.75	7.32	7.06	6.72	6.46
45.0	13.87	13.09	12.31	11.37	10.59	9.90	9.21	8.27	7.66
90.0	10.42	9.65	9.21	8.70	8.35	7.92	7.49	7.06	6.72
135.0	10.33	9.73	9.04	8.44	7.84	7.32	6.98	6.54	6.29
180.0	11.71	11.11	10.42	9.90	9.30	8.61	8.10	7.58	7.06
225.0	12.92	11.88	11.11	10.33	9.56	8.78	8.18	7.58	6.98
270.0	13.00	12.23	11.37	10.59	9.90	9.13	8.61	8.10	7.49
315.0	6.63	6.37	6.20	5.94	5.77	5.68	5.60	5.51	5.43
360.0	9.21	8.87	8.44	8.10	7.75	7.32	7.06	6.72	6.46
C/ γ (°)	72.0	73.0	74.0	75.0	76.0	77.0	78.0	79.0	80.0
0.0	6.11	5.86	5.68	5.60	5.43	5.34	5.25	5.17	5.08
45.0	7.06	6.54	6.03	5.86	5.68	5.60	5.43	5.43	5.25
90.0	6.46	6.20	6.11	5.94	5.94	5.77	5.68	5.60	5.43
135.0	5.94	5.60	5.43	5.34	5.25	5.17	5.08	5.08	4.99
180.0	6.63	6.11	5.94	5.77	5.68	5.60	5.51	5.43	5.34
225.0	6.46	5.94	5.68	5.60	5.43	5.34	5.25	5.17	5.08
270.0	7.06	6.72	6.37	6.20	6.03	5.94	5.86	5.86	5.77
315.0	5.34	5.25	5.17	5.08	4.99	4.99	4.91	4.82	4.74
360.0	6.11	5.86	5.68	5.60	5.43	5.34	5.25	5.17	5.08
C/ γ (°)	81.0	82.0	83.0	84.0	85.0	86.0	87.0	88.0	89.0
0.0	4.99	4.99	4.82	4.74	4.56	4.48	4.31	4.13	4.05
45.0	5.17	4.99	4.99	4.82	4.74	4.48	4.39	4.13	3.96
90.0	5.34	5.17	4.99	4.91	4.65	4.39	4.22	3.96	3.88
135.0	4.91	4.91	4.82	4.82	4.74	4.48	4.39	4.13	3.96
180.0	5.34	5.25	5.17	4.99	4.91	4.74	4.48	4.22	3.96
225.0	4.99	4.91	4.74	4.65	4.48	4.31	4.05	3.96	3.79
270.0	5.68	5.60	5.43	5.25	4.99	4.82	4.48	4.13	3.96
315.0	4.74	4.65	4.56	4.48	4.39	4.22	4.13	4.05	3.88
360.0	4.99	4.99	4.82	4.74	4.56	4.48	4.31	4.13	4.05

Intensity data(cd)

C/ γ (°)	90.0
0.0	3.96
45.0	3.79
90.0	3.79
135.0	3.79
180.0	3.88
225.0	3.79
270.0	3.79
315.0	3.79
360.0	3.96