
LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.23V I:0.0505A P:5.1318W PF:0.4418 Freq:50.18Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:592.27x1 lm		
LumCAT: 1-1892-A2	Test NO: 20261030-C009	Report NO: 20261030-B009
LED HOLDER: 92.70.458.00	DIM.:	Lamp No.: 1
LampCAT: CITIZEN CLU703	MFR.: NATA	

DATA OF LAMP		PHOTOMETRIC DATA		Eff: 105.29 lm/W	
MODEL		Imax(cd)	891.9	S/MH(C0/180)	0.62
NOMINAL POWER(W)	10	LOR(%)	91.2	S/MH(C90/270)	0.66
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	540.30	η UP,DN(C0-180)	0.0,46.9
NOMINAL FLUX(lm)	592.27	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,44.3
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	34.9	η down(%)	91.2	CIBSE SHR MAX	0.60


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

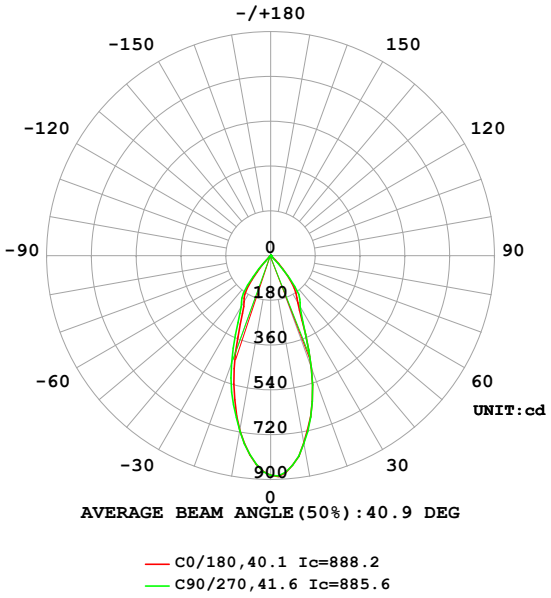

AVERAGE BEAM ANGLE(50%):40.9 DEG

C0/180,40.1 Ic=888.2
C90/270,41.6 Ic=885.6

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

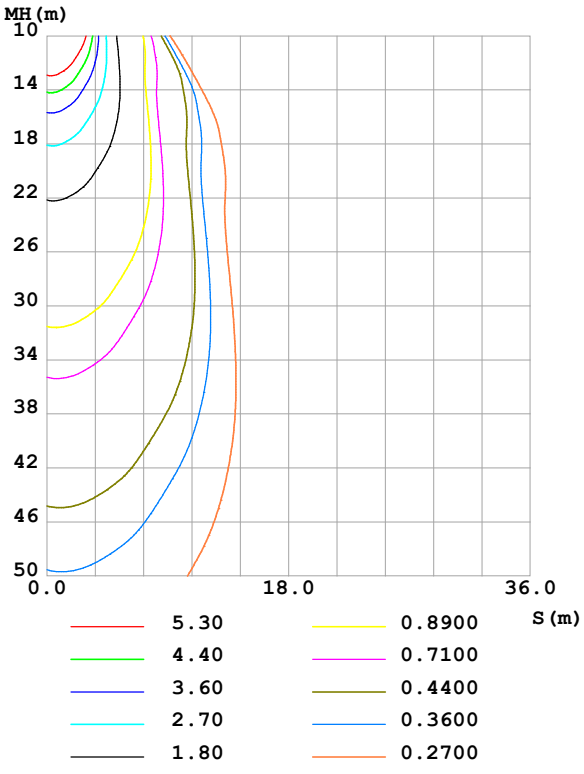

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-10-30

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	765.6	778.6	767.9	737.7	715.2	698.9	716.1	738.2	0- 10	77.15	77.15	14.3,13
20	480.7	492.2	477.7	436.6	415.3	423.5	459.9	471.8	10- 20	167.4	244.6	45.3,41.3
30	218.8	243.4	237.9	233.1	214.8	230.0	238.0	237.0	20- 30	146.7	391.2	72.4,66.1
40	106.3	131.5	116.0	102.1	87.92	97.04	109.7	126.0	30- 40	114.6	505.8	93.6,85.4
50	10.84	9.797	8.438	7.336	7.079	6.291	6.459	7.661	40- 50	29.43	535.2	99.1,90.4
60	2.206	1.596	1.237	0.9575	1.076	0.9537	1.185	1.522	50- 60	3.424	538.6	99.7,90.9
70	0.9300	0.7521	0.7301	0.5013	0.5949	0.5588	0.7126	0.7759	60- 70	0.9411	539.6	99.9,91.1
80	0.4415	0.3143	0.3386	0.2536	0.4413	0.2380	0.3045	0.2911	70- 80	0.5339	540.1	100,91.2
90	0.0501	0.0167	0	0.0033	0.0501	0	0	0	80- 90	0.1830	540.3	100,91.2
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 531.57 lm

%lum = 98.4%
%lamp = 89.8%

Conical surface Flux(130deg): 539.27 lm

%lum = 99.8%
%lamp = 91.1%

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-10-30


γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.23V I:0.0505A P:5.1318W PF:0.4418 Freq:50.18Hz **UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:592.27x1 lm**		
LumCAT: 1-1892-A2	**Test NO: 20261030-C009**	**Report NO: 20261030-B009**
LED HOLDER: 92.70.458.00	**DIM.:**	**Lamp No.: 1**
LampCAT: CITIZEN CLU703	**MFR.: NATA**	

LUMINANCE LIMITATION CURVES

GLARE	CLASS	ILLUMINANCE (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
		a	b	c	d	e	f	g	h

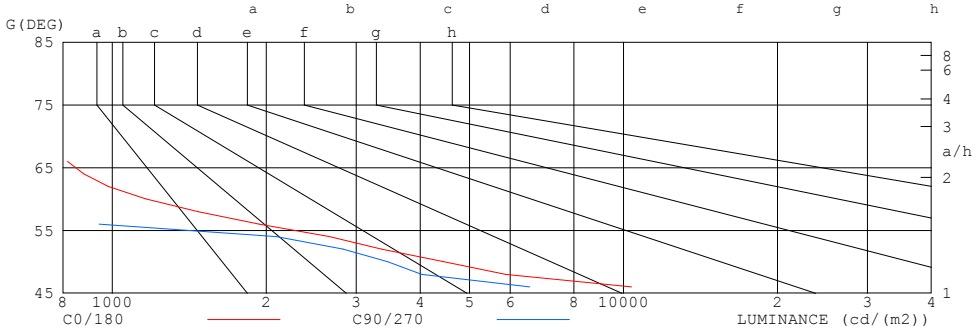

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	778	657
80	669	513
75	721	592
70	716	561
65	911	586
60	1161	651
55	2726	2147
50	4442	3451
45	17249	15646

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-10-30

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:


CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.23V I:0.0505A P:5.1318W PF:0.4418 Freq:50.18Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:592.27x1 lm		
LumCAT: 1-1892-A2	Test NO: 20261030-C009	Report NO: 20261030-B009
LED HOLDER: 92.70.458.00	DIM.:	Lamp No.: 1
LampCAT: CITIZEN CLU703	MFR.: NATA	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.09	1.09	1.09	1.06	1.06	1.06	1.01	1.01	1.01	.97	.97	.97	.93	.93	.93	.91
1.0	1.01	.99	.97	.99	.97	.96	.96	.94	.93	.92	.91	.90	.89	.88	.87	.86
2.0	.95	.91	.88	.93	.90	.87	.90	.88	.85	.87	.85	.83	.85	.83	.82	.80
3.0	.89	.84	.81	.87	.83	.80	.85	.82	.79	.83	.80	.78	.81	.78	.76	.75
4.0	.83	.78	.75	.82	.78	.74	.80	.76	.73	.78	.75	.72	.77	.74	.72	.70
5.0	.78	.73	.69	.77	.73	.69	.76	.72	.68	.74	.71	.68	.73	.70	.67	.66
6.0	.74	.68	.65	.73	.68	.64	.72	.67	.64	.70	.67	.64	.69	.66	.63	.62
7.0	.70	.64	.61	.69	.64	.60	.68	.63	.60	.67	.63	.60	.66	.62	.60	.58
8.0	.66	.61	.57	.65	.60	.57	.64	.60	.57	.63	.59	.56	.63	.59	.56	.55
9.0	.62	.57	.54	.62	.57	.54	.61	.57	.54	.60	.56	.53	.60	.56	.53	.52
10.0	.59	.54	.51	.59	.54	.51	.58	.54	.51	.58	.53	.51	.57	.53	.50	.49

LAMPS

LUMINAIRE BUDGETARY DIAGRAM

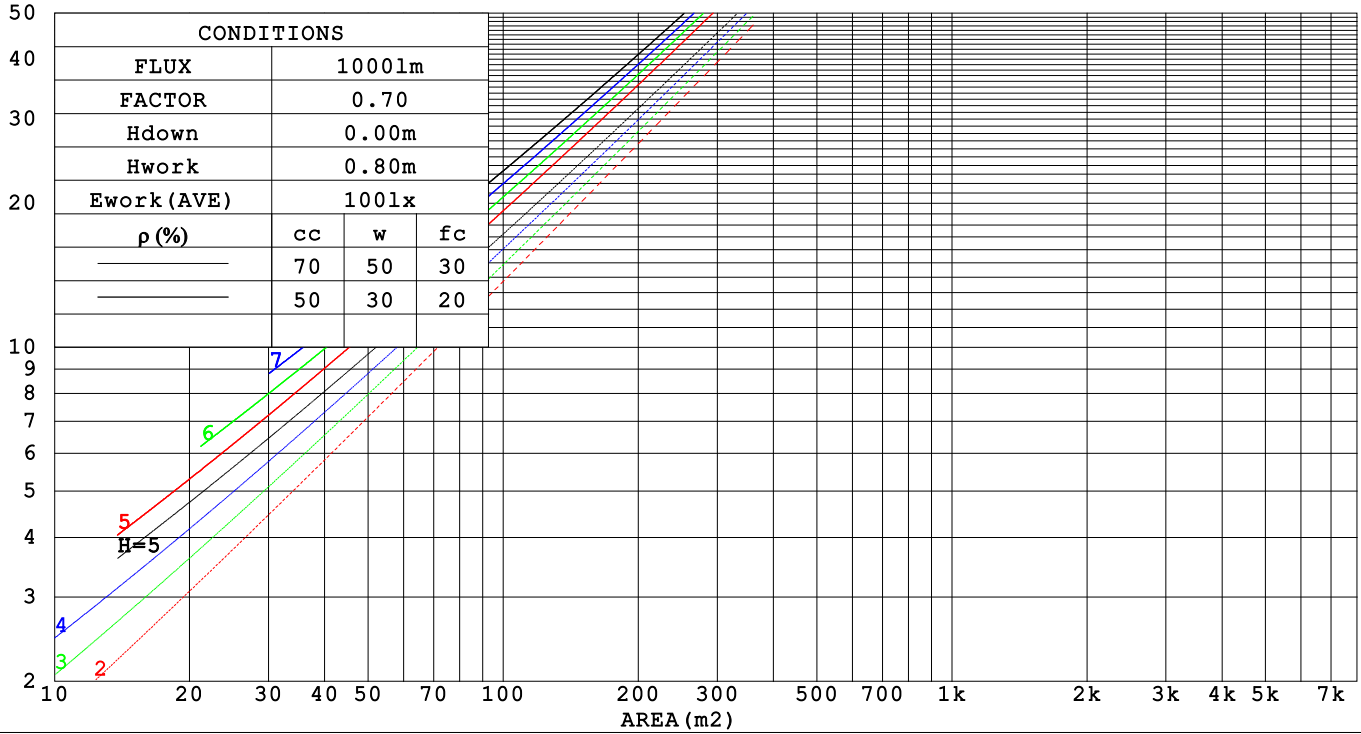

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-10-30

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:230.23V I:0.0505A P:5.1318W PF:0.4418 Freq:50.18Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:592.27x1 lm		
LumCAT: 1-1892-A2	Test NO: 20261030-C009	Report NO: 20261030-B009
LED HOLDER: 92.70.458.00	DIM.:	Lamp No.: 1
LampCAT: CITIZEN CLU703	MFR.: NATA	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coeffcients(WEC)									
0.0																
1.0	.157	.089	.028	.151	.086	.027	.139	.080	.025	.129	.074	.024	.119	.069	.022	
2.0	.150	.082	.025	.145	.080	.025	.135	.075	.023	.126	.071	.022	.118	.067	.021	
3.0	.143	.076	.023	.138	.074	.022	.130	.070	.021	.122	.067	.021	.115	.064	.020	
4.0	.136	.071	.021	.132	.069	.020	.125	.066	.020	.118	.064	.019	.112	.061	.019	
5.0	.129	.066	.019	.126	.065	.019	.120	.063	.018	.114	.060	.018	.109	.058	.018	
6.0	.124	.062	.018	.121	.061	.018	.115	.059	.017	.110	.057	.017	.106	.056	.017	
7.0	.118	.058	.017	.116	.058	.016	.111	.056	.016	.106	.055	.016	.102	.053	.016	
8.0	.113	.055	.016	.111	.055	.015	.107	.053	.015	.103	.052	.015	.099	.051	.015	
9.0	.108	.052	.015	.106	.052	.015	.103	.051	.014	.099	.050	.014	.096	.049	.014	
10.0	.104	.050	.014	.102	.049	.014	.099	.048	.014	.096	.047	.013	.093	.047	.013	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.174	.174	.174	.149	.149	.149	.101	.101	.101	.058	.058	.058	.019	.019	.019	
1.0	.156	.144	.133	.133	.123	.114	.091	.085	.079	.052	.049	.046	.017	.016	.015	
2.0	.142	.121	.103	.121	.104	.089	.083	.072	.062	.048	.042	.037	.015	.014	.012	
3.0	.130	.104	.082	.112	.089	.071	.077	.062	.050	.044	.036	.030	.014	.012	.010	
4.0	.121	.090	.067	.103	.078	.058	.071	.054	.041	.041	.032	.024	.013	.010	.008	
5.0	.112	.079	.055	.097	.069	.048	.067	.048	.034	.039	.028	.020	.012	.009	.007	
6.0	.106	.071	.046	.091	.061	.040	.063	.043	.028	.036	.025	.017	.012	.008	.006	
7.0	.100	.064	.039	.086	.055	.034	.059	.039	.024	.034	.023	.014	.011	.007	.005	
8.0	.094	.058	.033	.081	.051	.029	.056	.035	.021	.033	.021	.012	.011	.007	.004	
9.0	.090	.053	.029	.077	.046	.025	.054	.033	.018	.031	.019	.011	.010	.006	.004	
10.0	.086	.049	.025	.074	.043	.022	.051	.030	.016	.030	.018	.009	.010	.006	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-10-30

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.23V I:0.0505A P:5.1318W PF:0.4418 Freq:50.18Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:592.27x1 lm		
LumCAT: 1-1892-A2	Test NO: 20261030-C009	Report NO: 20261030-B009
LED HOLDER: 92.70.458.00	DIM.:	Lamp No.: 1
LampCAT: CITIZEN CLU703	MFR.: NATA	

ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H	y = 2H	23.0	23.9	23.2	24.1	24.2	23.3	24.2	23.5	24.3	24.5
	3H	22.8	23.7	23.1	23.9	24.1	23.1	23.9	23.4	24.1	24.3
	4H	22.7	23.5	23.0	23.8	24.0	23.0	23.8	23.3	24.0	24.3
	6H	22.7	23.4	23.0	23.6	23.9	22.9	23.7	23.2	23.9	24.2
	8H	22.6	23.3	22.9	23.6	23.8	22.9	23.6	23.2	23.9	24.1
	12H	22.6	23.3	22.9	23.5	23.8	22.8	23.5	23.2	23.8	24.1
4H	2H	22.7	23.5	23.0	23.7	24.0	23.0	23.8	23.3	24.0	24.3
	3H	22.6	23.3	22.9	23.5	23.8	22.8	23.5	23.2	23.8	24.1
	4H	22.5	23.1	22.8	23.4	23.7	22.8	23.4	23.1	23.7	24.0
	6H	22.4	22.9	22.8	23.3	23.6	22.7	23.2	23.0	23.5	23.9
	8H	22.3	22.8	22.7	23.2	23.6	22.6	23.1	23.0	23.5	23.8
	12H	22.3	22.8	22.7	23.1	23.5	22.6	23.0	23.0	23.4	23.8
8H	4H	22.3	22.8	22.7	23.2	23.6	22.6	23.1	23.0	23.5	23.8
	6H	22.2	22.7	22.7	23.0	23.5	22.5	22.9	22.9	23.3	23.7
	8H	22.2	22.6	22.6	23.0	23.4	22.5	22.8	22.9	23.2	23.7
	12H	22.1	22.5	22.6	22.9	23.4	22.4	22.7	22.9	23.2	23.6
12H	4H	22.3	22.7	22.7	23.1	23.5	22.6	23.0	23.0	23.4	23.8
	6H	22.2	22.6	22.6	23.0	23.4	22.5	22.8	22.9	23.2	23.7
	8H	22.1	22.4	22.6	22.9	23.4	22.4	22.7	22.9	23.2	23.6

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 2.9 / -14.3	+ 3.2 / -16.7
1.5H	+ 5.4 / -13.2	+ 5.8 / -14.9
2.0H	+ 7.2 / - 7.2	+ 6.1 / - 6.6

CIE Pub.117, 592.3 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -1.8)
Area: 0.0038 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-10-30

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.23V I:0.0505A P:5.1318W PF:0.4418 Freq:50.18Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:592.27x1 lm		
LumCAT: 1-1892-A2	Test NO: 20261030-C009	Report NO: 20261030-B009
LED HOLDER: 92.70.458.00	DIM.:	Lamp No.: 1
LampCAT: CITIZEN CLU703	MFR.: NATA	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	80	74	71	79	74	71	79	74	70	67
0.80	87	81	78	86	81	78	85	81	78	74
1.00	91	86	83	90	85	82	89	85	82	78
1.25	94	90	87	93	89	86	92	88	86	82
1.50	97	93	90	96	92	89	94	91	88	84
2.00	99	96	93	98	95	92	96	93	91	86
2.50	101	97	95	99	96	94	96	94	92	87
3.00	102	99	97	100	98	96	97	95	94	88
4.00	104	101	99	102	100	98	99	97	96	89
5.00	105	103	101	103	101	100	99	98	97	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended					SHRNOM = 1.25	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-10-30

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:230.23V I:0.0505A P:5.1318W PF:0.4418 Freq:50.18Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:592.27x1 lm		
LumCAT: 1-1892-A2	Test NO: 20261030-C009	Report NO: 20261030-B009
LED HOLDER: 92.70.458.00	DIM.:	Lamp No.: 1
LampCAT: CITIZEN CLU703	MFR.: NATA	

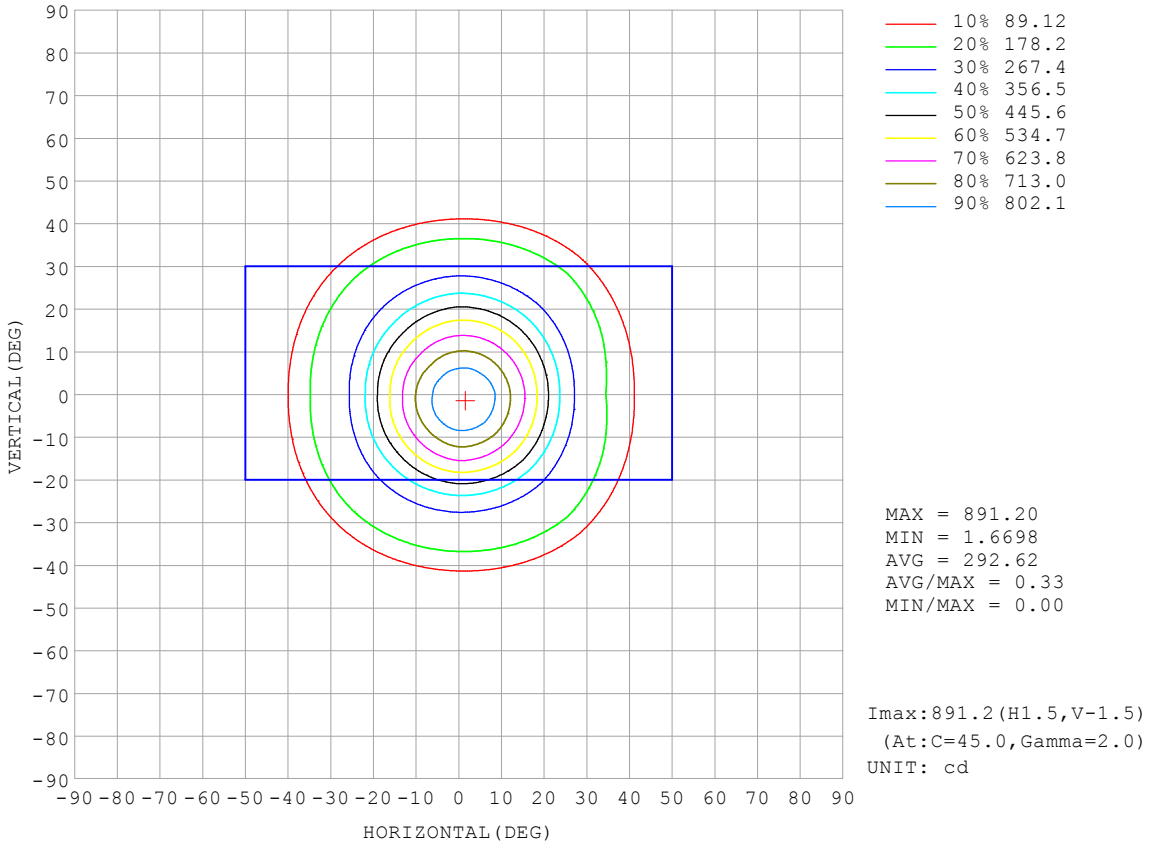


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-10-30

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

AAI Figure

Test:U:230.23V I:0.0505A P:5.1318W PF:0.4418 Freq:50.18Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:592.27x1 lm		
LumCAT: 1-1892-A2	Test NO: 20261030-C009	Report NO: 20261030-B009
LED HOLDER: 92.70.458.00	DIM.:	Lamp No.: 1
LampCAT: CITIZEN CLU703	MFR.: NATA	

Flux out:278.0 lm

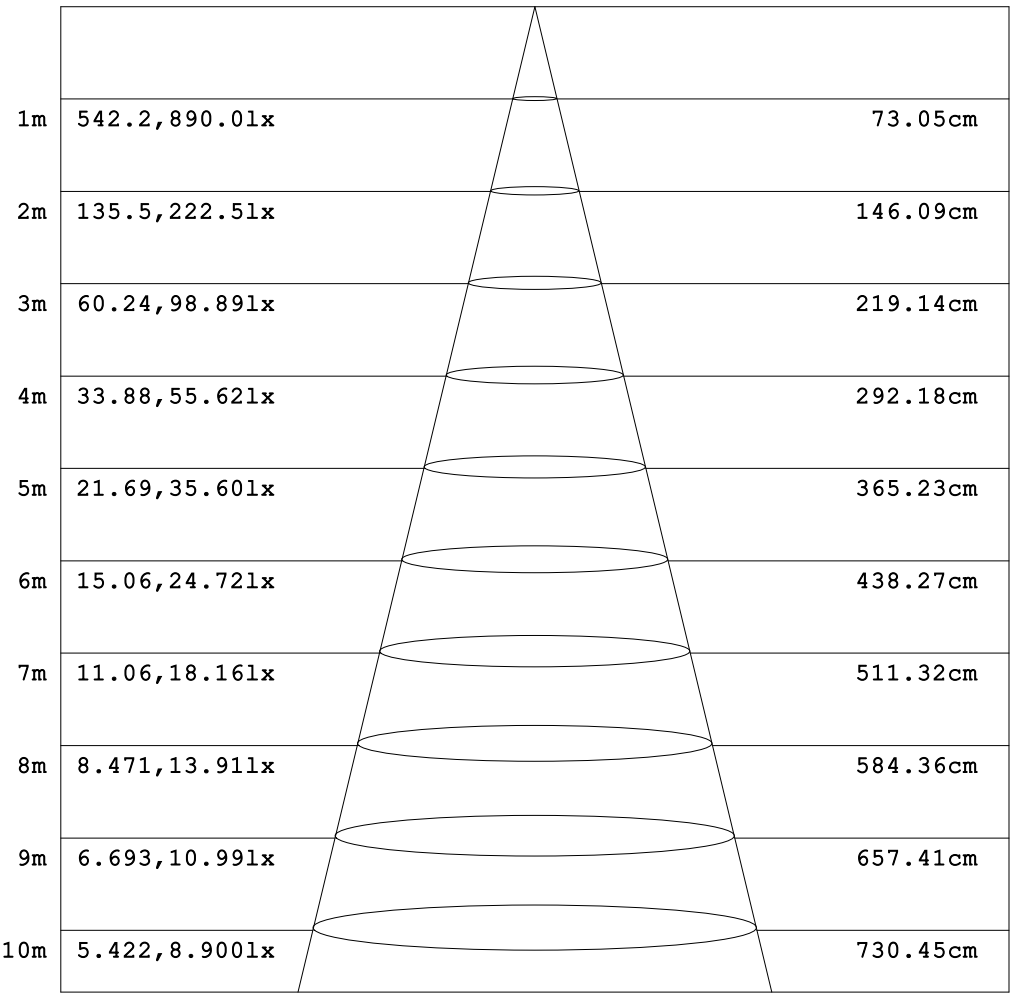


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-10-30

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:230.23V I:0.0505A P:5.1318W PF:0.4418 Freq:50.18Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:592.27x1 lm		
LumCAT: 1-1892-A2	Test NO: 20261030-C009	Report NO: 20261030-B009
LED HOLDER: 92.70.458.00	DIM.:	Lamp No.: 1
LampCAT: CITIZEN CLU703	MFR.: NATA	

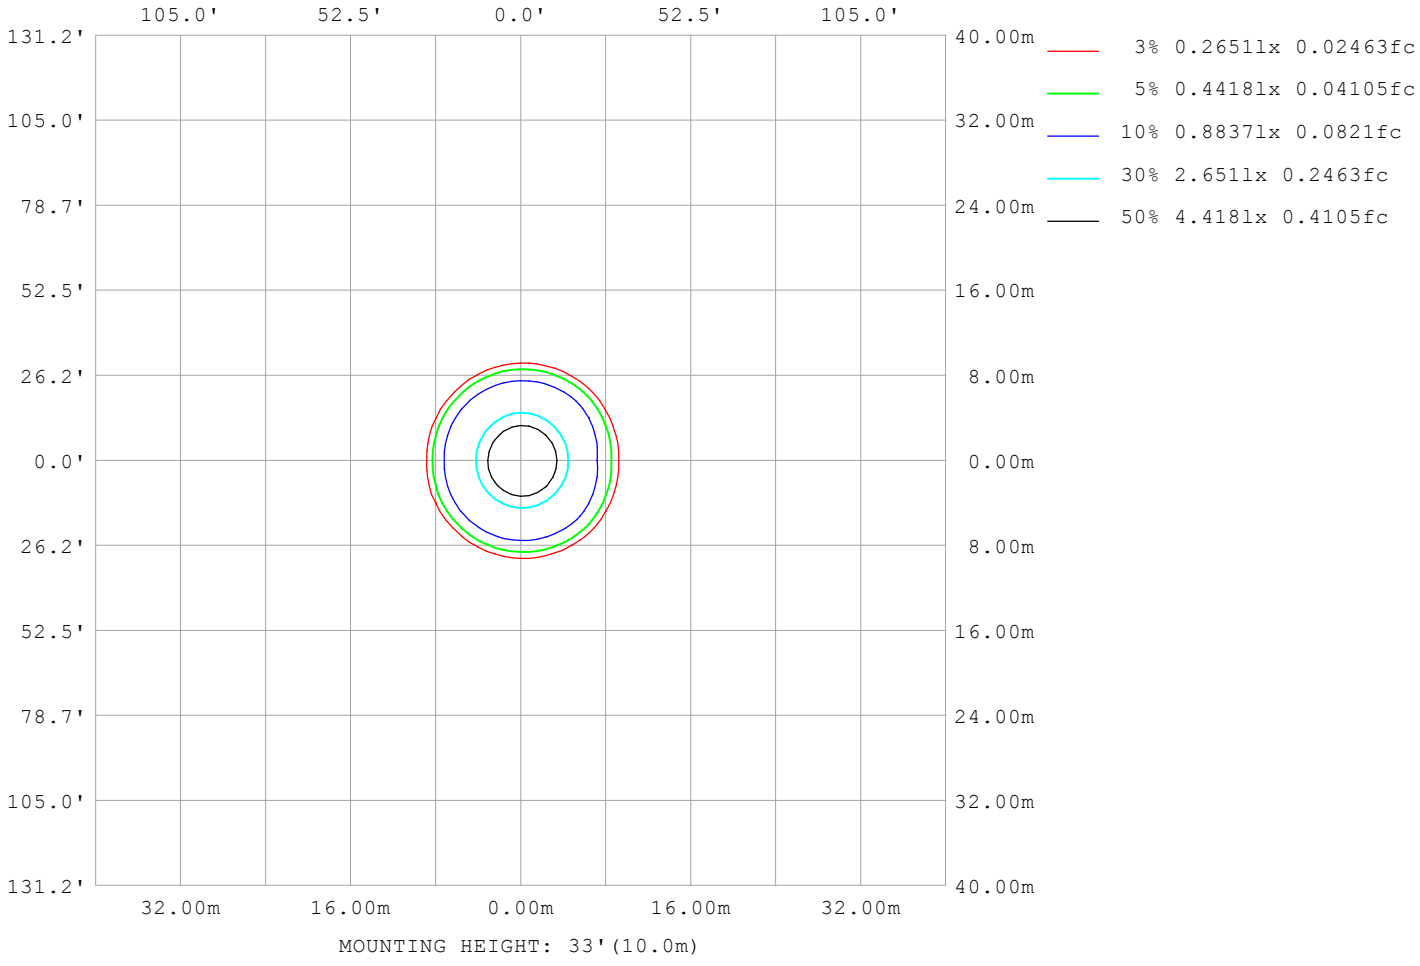

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-10-30

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:230.23V I:0.0505A P:5.1318W PF:0.4418 Freq:50.18Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:592.27x1 lm		
LumCAT: 1-1892-A2	Test NO: 20261030-C009	Report NO: 20261030-B009
LED HOLDER: 92.70.458.00	DIM.:	Lamp No.: 1
LampCAT: CITIZEN CLU703	MFR.: NATA	


AvgL	cd/m2
L_0~180(65)av	666
L_0~180(75)av	583
L_0~180(85)av	597
L_90~270(65)av	560
L_90~270(75)av	524
L_90~270(85)av	505
L_45(65)av	527
L_45(75)av	472
L_45(85)av	440

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-10-30

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

Planar Illuminance Curve

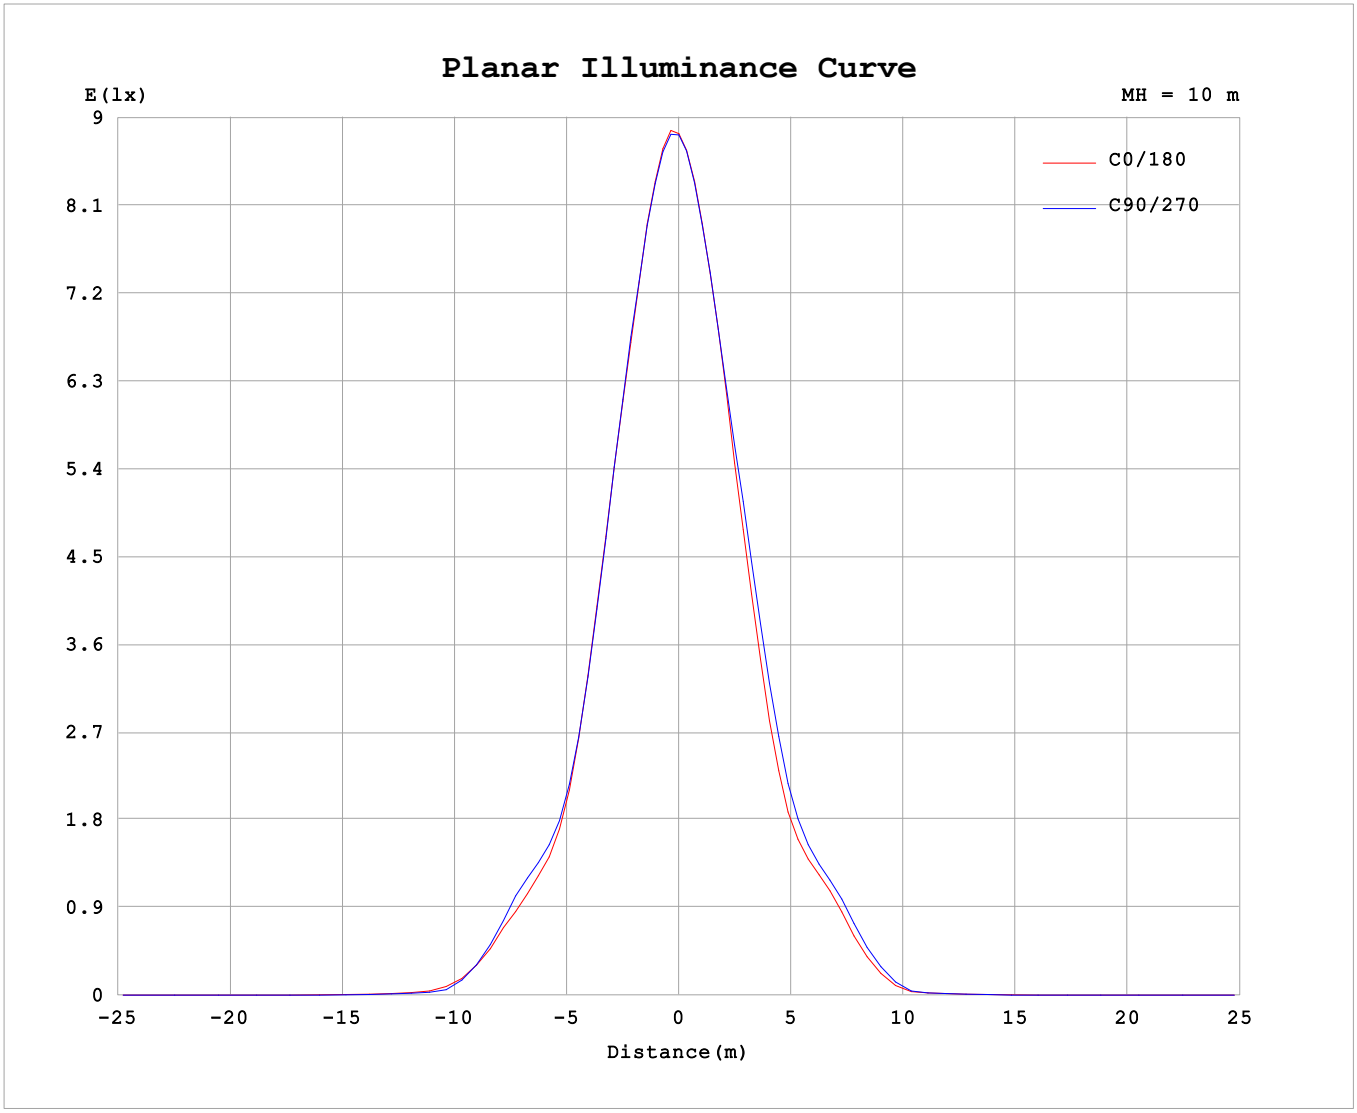

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-10-30

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.23V I:0.0505A P:5.1318W PF:0.4418 Freq:50.18Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:592.27x1 lm		
LumCAT: 1-1892-A2	Test NO: 20261030-C009	Report NO: 20261030-B009
LED HOLDER: 92.70.458.00	DIM.:	Lamp No.: 1
LampCAT: CITIZEN CLU703	MFR.: NATA	

Table--1 UNIT: cd

γ (DEG) \ C(DEG)	0	45	90	135	180	225	270	315
0	883	883	883	883	883	883	883	883
5	848	860	847	827	804	796	804	822
10	766	779	768	738	715	699	716	738
15	610	617	611	570	537	545	571	588
20	481	492	478	437	415	424	460	472
25	290	306	298	281	259	279	299	300
30	219	243	238	233	215	230	238	237
35	162	203	193	182	161	177	187	198
40	106	132	116	102	87.9	97.0	110	126
45	27.4	24.6	17.3	12.6	11.6	10.2	13.4	20.5
50	10.8	9.80	8.44	7.34	7.08	6.29	6.46	7.66
55	4.12	2.67	2.00	1.64	1.92	1.50	1.81	2.51
60	2.21	1.60	1.24	0.96	1.08	0.95	1.18	1.52
65	1.26	0.98	0.86	0.60	0.74	0.65	0.85	0.98
70	0.93	0.75	0.73	0.50	0.59	0.56	0.71	0.78
75	0.62	0.48	0.48	0.37	0.48	0.38	0.45	0.46
80	0.44	0.31	0.34	0.25	0.44	0.24	0.30	0.29
85	0.15	0.15	0.14	0.10	0.13	0.11	0.12	0.11
90	0.05	0.02	0.00	0.00	0.05	0.00	0.00	0.00

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-10-30

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks: