
LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.16V I:0.0506A P:5.1310W PF:0.4407 Freq:50.18Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:592.84x1 lm		
LumCAT: 1-1893-A2	Test NO: 20261102-C008	Report NO: 20261102-B008
LED HOLDER: 92.70.458.00	DIM.:	Lamp No.: 1
LampCAT: CITIZEN CLU703	MFR.: NATA	

DATA OF LAMP		PHOTOMETRIC DATA		Eff: 104.57 lm/W	
MODEL		Imax(cd)	596.6	S/MH(C0/180)	0.82
NOMINAL POWER(W)	10	LOR(%)	90.5	S/MH(C90/270)	0.84
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	536.53	η UP,DN(C0-180)	0.0,46.4
NOMINAL FLUX(lm)	592.84	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,44.1
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	34.9	η down(%)	90.5	CIBSE SHR MAX	1.00


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

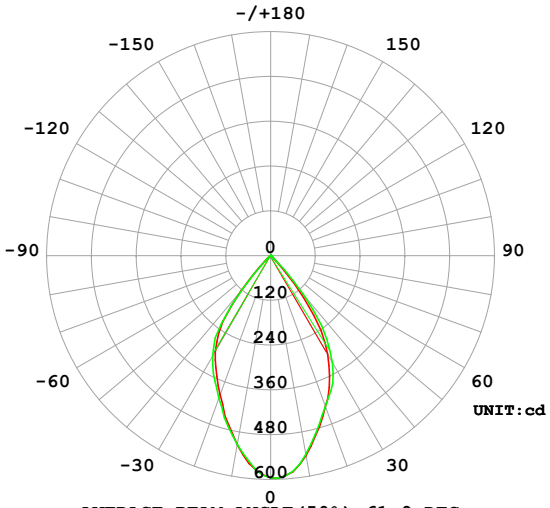

AVERAGE BEAM ANGLE(50%):61.9 DEG

C0/180,60.5 Ic=596.4
C90/270,63.3 Ic=596.2

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

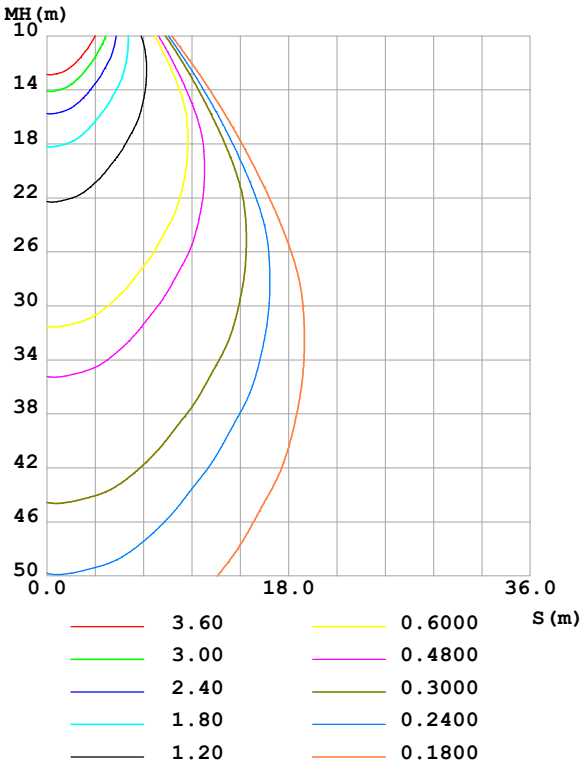

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-11-02

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	544.1	552.2	541.5	529.7	514.7	504.4	513.7	525.9	0- 10	53.45	53.45	9.96,9.02
20	430.0	442.8	430.5	415.1	396.3	392.4	406.5	409.2	10- 20	131.9	185.3	34.5,31.3
30	305.6	316.1	331.9	316.8	297.7	304.3	310.6	317.5	20- 30	167.7	353.0	65.8,59.5
40	100.5	133.7	136.2	140.4	122.9	123.3	119.7	117.6	30- 40	144.0	497.0	92.6,83.8
50	10.59	10.92	9.903	10.92	10.61	9.833	8.642	7.199	40- 50	32.91	529.9	98.8,89.4
60	2.829	2.021	1.749	1.992	2.323	1.802	1.579	1.820	50- 60	4.414	534.3	99.6,90.1
70	1.147	0.8446	0.8375	0.7871	0.8726	0.7359	0.8262	0.7640	60- 70	1.288	535.6	99.8,90.3
80	0.4619	0.3938	0.4418	0.3782	0.4246	0.4178	0.4946	0.3555	70- 80	0.6655	536.3	100,90.5
90	0.0602	0.0134	0	0.0134	0.0267	0	0	0.0067	80- 90	0.2388	536.5	100,90.5
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 525.51 lm

%lum = 97.9%
%lamp = 88.6%

Conical surface Flux(130deg): 535.22 lm

%lum = 99.8%
%lamp = 90.3%

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-11-02


γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.16V I:0.0506A P:5.1310W PF:0.4407 Freq:50.18Hz **UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:592.84x1 lm**		
LumCAT: 1-1893-A2	**Test NO: 20261102-C008**	**Report NO: 20261102-B008**
LED HOLDER: 92.70.458.00	**DIM.:**	**Lamp No.: 1**
LampCAT: CITIZEN CLU703	**MFR.: NATA**	

LUMINANCE LIMITATION CURVES

GLARE	CLASS	ILLUMINANCE (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
		a	b	c	d	e	f	g	h

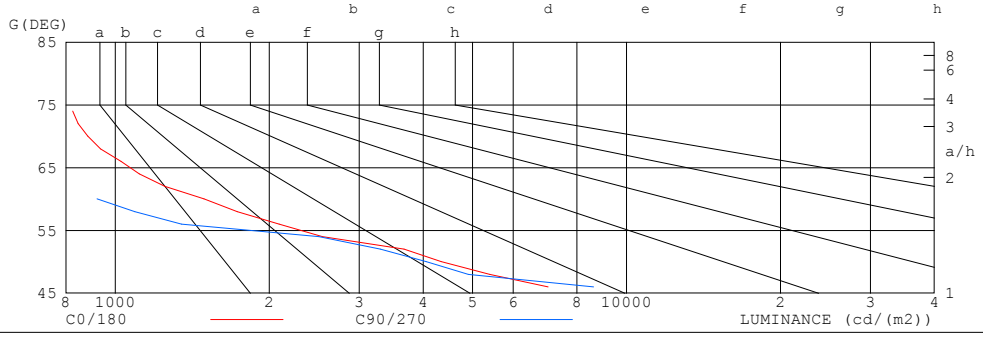

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	668	929
80	700	669
75	878	687
70	883	644
65	1155	760
60	1490	920
55	2605	2564
50	4339	4053
45	11558	19307

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-11-02

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:


CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.16V I:0.0506A P:5.1310W PF:0.4407 Freq:50.18Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:592.84x1 lm		
LumCAT: 1-1893-A2	Test NO: 20261102-C008	Report NO: 20261102-B008
LED HOLDER: 92.70.458.00	DIM.:	Lamp No.: 1
LampCAT: CITIZEN CLU703	MFR.: NATA	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.08	1.08	1.08	1.05	1.05	1.05	1.01	1.01	1.01	.96	.96	.96	.92	.92	.92	.91
1.0	1.00	.98	.96	.98	.96	.94	.94	.93	.91	.91	.90	.89	.88	.87	.86	.84
2.0	.93	.89	.86	.91	.88	.85	.88	.86	.83	.86	.83	.81	.83	.81	.80	.78
3.0	.86	.82	.78	.85	.81	.78	.83	.79	.76	.81	.78	.75	.79	.76	.74	.72
4.0	.81	.75	.71	.79	.75	.71	.78	.73	.70	.76	.72	.69	.74	.71	.69	.67
5.0	.75	.70	.66	.74	.69	.65	.73	.68	.65	.71	.67	.64	.70	.66	.64	.62
6.0	.70	.65	.61	.70	.64	.61	.68	.64	.60	.67	.63	.60	.66	.62	.59	.58
7.0	.66	.60	.56	.65	.60	.56	.64	.59	.56	.63	.59	.56	.62	.58	.55	.54
8.0	.62	.56	.52	.61	.56	.52	.60	.56	.52	.59	.55	.52	.59	.55	.52	.50
9.0	.58	.53	.49	.58	.53	.49	.57	.52	.49	.56	.52	.49	.55	.51	.48	.47
10.0	.55	.50	.46	.54	.49	.46	.54	.49	.46	.53	.49	.46	.52	.48	.45	.44

LAMPS

LUMINAIRE BUDGETARY DIAGRAM

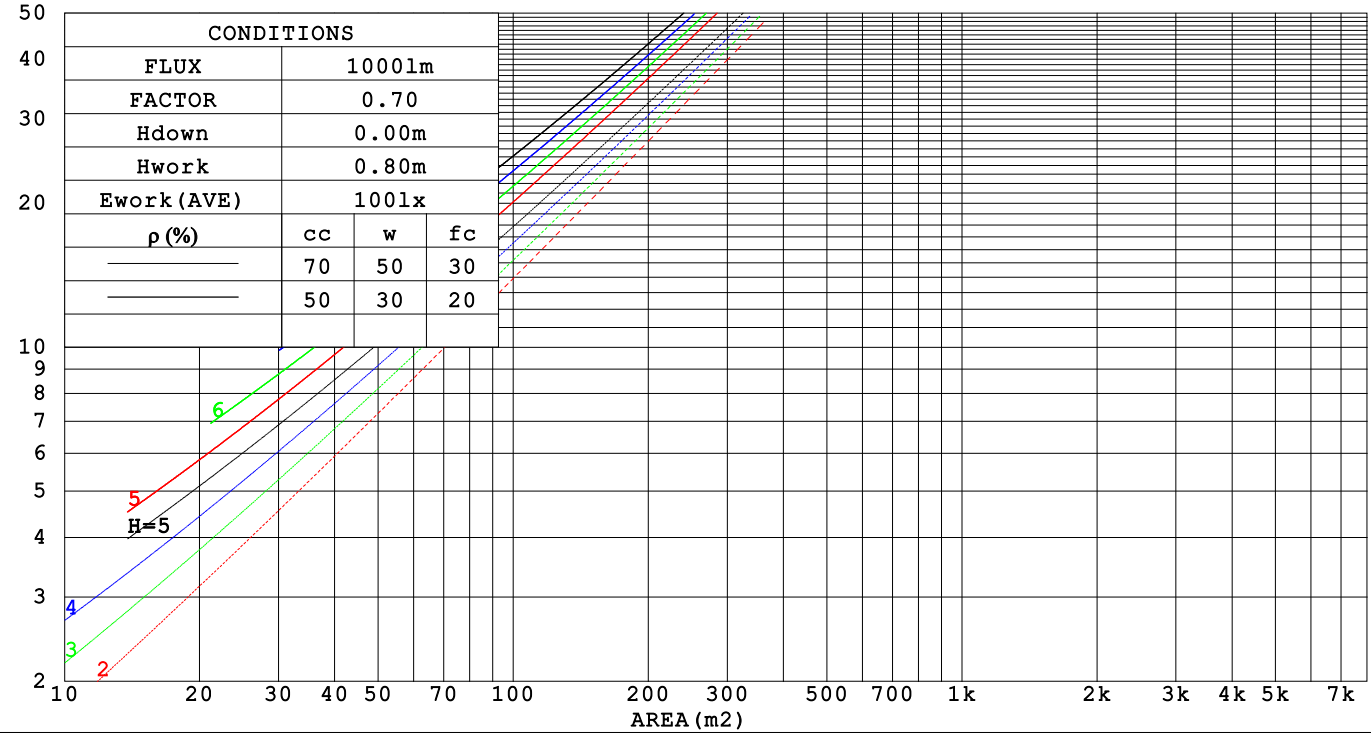

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-11-02

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:230.16V I:0.0506A P:5.1310W PF:0.4407 Freq:50.18Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:592.84x1 lm		
LumCAT: 1-1893-A2	Test NO: 20261102-C008	Report NO: 20261102-B008
LED HOLDER: 92.70.458.00	DIM.:	Lamp No.: 1
LampCAT: CITIZEN CLU703	MFR.: NATA	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coeffcients(WEC)									
0.0																
1.0	.164	.093	.030	.158	.090	.029	.147	.084	.027	.136	.079	.025	.126	.073	.024	
2.0	.158	.086	.027	.153	.084	.026	.143	.080	.025	.134	.075	.024	.126	.071	.022	
3.0	.151	.080	.024	.146	.078	.024	.138	.075	.023	.131	.072	.022	.124	.068	.021	
4.0	.144	.075	.022	.140	.073	.022	.133	.071	.021	.127	.068	.020	.120	.065	.020	
5.0	.138	.070	.020	.134	.069	.020	.128	.067	.020	.122	.065	.019	.117	.062	.019	
6.0	.132	.066	.019	.129	.065	.019	.123	.063	.018	.118	.061	.018	.113	.060	.018	
7.0	.126	.062	.018	.123	.061	.018	.118	.060	.017	.114	.058	.017	.110	.057	.017	
8.0	.121	.059	.017	.118	.058	.016	.114	.057	.016	.110	.056	.016	.106	.054	.016	
9.0	.116	.056	.016	.114	.055	.016	.110	.054	.015	.106	.053	.015	.102	.052	.015	
10.0	.111	.053	.015	.109	.053	.015	.106	.052	.015	.102	.051	.014	.099	.050	.014	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.172	.172	.172	.147	.147	.147	.101	.101	.101	.058	.058	.058	.018	.018	.018	
1.0	.155	.142	.131	.133	.122	.113	.091	.084	.078	.052	.049	.045	.017	.016	.015	
2.0	.142	.120	.102	.121	.103	.088	.083	.071	.061	.048	.042	.036	.015	.013	.012	
3.0	.131	.103	.080	.112	.089	.070	.077	.062	.049	.044	.036	.029	.014	.012	.009	
4.0	.122	.090	.065	.105	.077	.056	.072	.054	.040	.042	.032	.023	.013	.010	.008	
5.0	.114	.079	.053	.098	.068	.046	.068	.048	.033	.039	.028	.019	.013	.009	.006	
6.0	.108	.071	.044	.093	.061	.039	.064	.043	.027	.037	.025	.016	.012	.008	.005	
7.0	.102	.064	.037	.088	.056	.033	.061	.039	.023	.035	.023	.014	.011	.008	.005	
8.0	.097	.059	.032	.084	.051	.028	.058	.036	.020	.034	.021	.012	.011	.007	.004	
9.0	.093	.054	.028	.080	.047	.024	.055	.033	.017	.032	.019	.010	.010	.006	.003	
10.0	.089	.050	.024	.076	.043	.021	.053	.031	.015	.031	.018	.009	.010	.006	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-11-02

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.16V I:0.0506A P:5.1310W PF:0.4407 Freq:50.18Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:592.84x1 lm		
LumCAT: 1-1893-A2	Test NO: 20261102-C008	Report NO: 20261102-B008
LED HOLDER: 92.70.458.00	DIM.:	Lamp No.: 1
LampCAT: CITIZEN CLU703	MFR.: NATA	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.8	24.8	24.1	25.0	25.2	24.4	25.4	24.6	25.6	25.7
3H	23.7	24.6	23.9	24.8	25.0	24.2	25.1	24.5	25.3	25.6
4H	23.6	24.4	23.9	24.7	24.9	24.2	25.0	24.4	25.2	25.5
6H	23.5	24.3	23.8	24.5	24.8	24.1	24.9	24.4	25.1	25.4
8H	23.5	24.2	23.8	24.5	24.7	24.0	24.8	24.3	25.0	25.3
12H	23.4	24.2	23.7	24.4	24.7	24.0	24.7	24.3	25.0	25.3
4H 2H	23.6	24.4	23.9	24.7	24.9	24.2	25.0	24.4	25.2	25.5
3H	23.4	24.1	23.7	24.4	24.7	24.0	24.7	24.3	25.0	25.3
4H	23.3	24.0	23.7	24.3	24.6	23.9	24.6	24.2	24.8	25.2
6H	23.2	23.8	23.6	24.2	24.5	23.8	24.4	24.2	24.7	25.1
8H	23.2	23.7	23.6	24.1	24.5	23.8	24.3	24.1	24.6	25.0
12H	23.1	23.6	23.6	24.0	24.4	23.7	24.2	24.1	24.6	25.0
8H 4H	23.2	23.7	23.6	24.1	24.4	23.7	24.3	24.1	24.6	25.0
6H	23.1	23.5	23.5	23.9	24.3	23.7	24.1	24.1	24.5	24.9
8H	23.0	23.4	23.5	23.9	24.3	23.6	24.0	24.1	24.4	24.8
12H	23.0	23.3	23.5	23.8	24.2	23.6	23.9	24.0	24.3	24.8
12H 4H	23.1	23.6	23.6	24.0	24.4	23.7	24.2	24.1	24.6	24.9
6H	23.0	23.4	23.5	23.8	24.3	23.6	24.0	24.0	24.4	24.8
8H	23.0	23.3	23.5	23.8	24.2	23.6	23.9	24.0	24.3	24.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.2 / -13.4					+ 3.6 / -15.9				
1.5H	+ 5.8 / -12.3					+ 6.2 / -14.3				
2.0H	+ 5.1 / - 5.1					+ 6.6 / - 6.2				

CIE Pub.117, 592.8 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -1.8)
Area: 0.0038 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-11-02

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.16V I:0.0506A P:5.1310W PF:0.4407 Freq:50.18Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:592.84x1 lm		
LumCAT: 1-1893-A2	Test NO: 20261102-C008	Report NO: 20261102-B008
LED HOLDER: 92.70.458.00	DIM.:	Lamp No.: 1
LampCAT: CITIZEN CLU703	MFR.: NATA	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	79	73	69	78	73	69	77	72	69	66
0.80	86	80	77	85	80	77	84	79	76	73
1.00	90	85	81	89	84	81	88	84	81	77
1.25	93	89	86	92	88	85	91	87	84	81
1.50	96	92	89	95	91	88	93	90	87	83
2.00	98	95	92	97	94	91	95	92	90	85
2.50	100	96	94	98	95	93	96	93	91	86
3.00	101	98	96	100	97	95	97	94	93	87
4.00	103	100	98	101	99	97	98	96	95	88
5.00	104	102	100	102	100	99	99	97	96	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended					SHRNOM = 1.25	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-11-02

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:230.16V I:0.0506A P:5.1310W PF:0.4407 Freq:50.18Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:592.84x1 lm		
LumCAT: 1-1893-A2	Test NO: 20261102-C008	Report NO: 20261102-B008
LED HOLDER: 92.70.458.00	DIM.:	Lamp No.: 1
LampCAT: CITIZEN CLU703	MFR.: NATA	

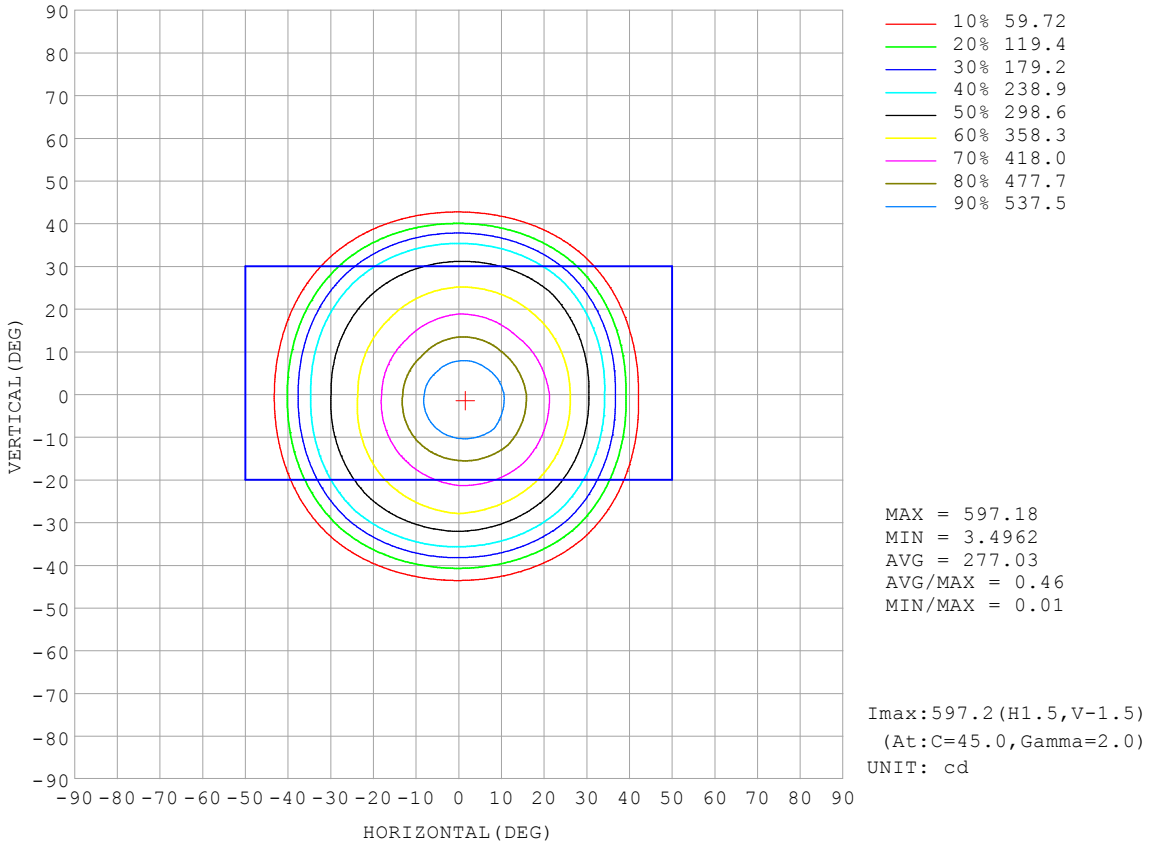


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-11-02

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

AAI Figure

Test:U:230.16V I:0.0506A P:5.1310W PF:0.4407 Freq:50.18Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:592.84x1 lm		
LumCAT: 1-1893-A2	Test NO: 20261102-C008	Report NO: 20261102-B008
LED HOLDER: 92.70.458.00	DIM.:	Lamp No.: 1
LampCAT: CITIZEN CLU703	MFR.: NATA	

Flux out:386.9 lm

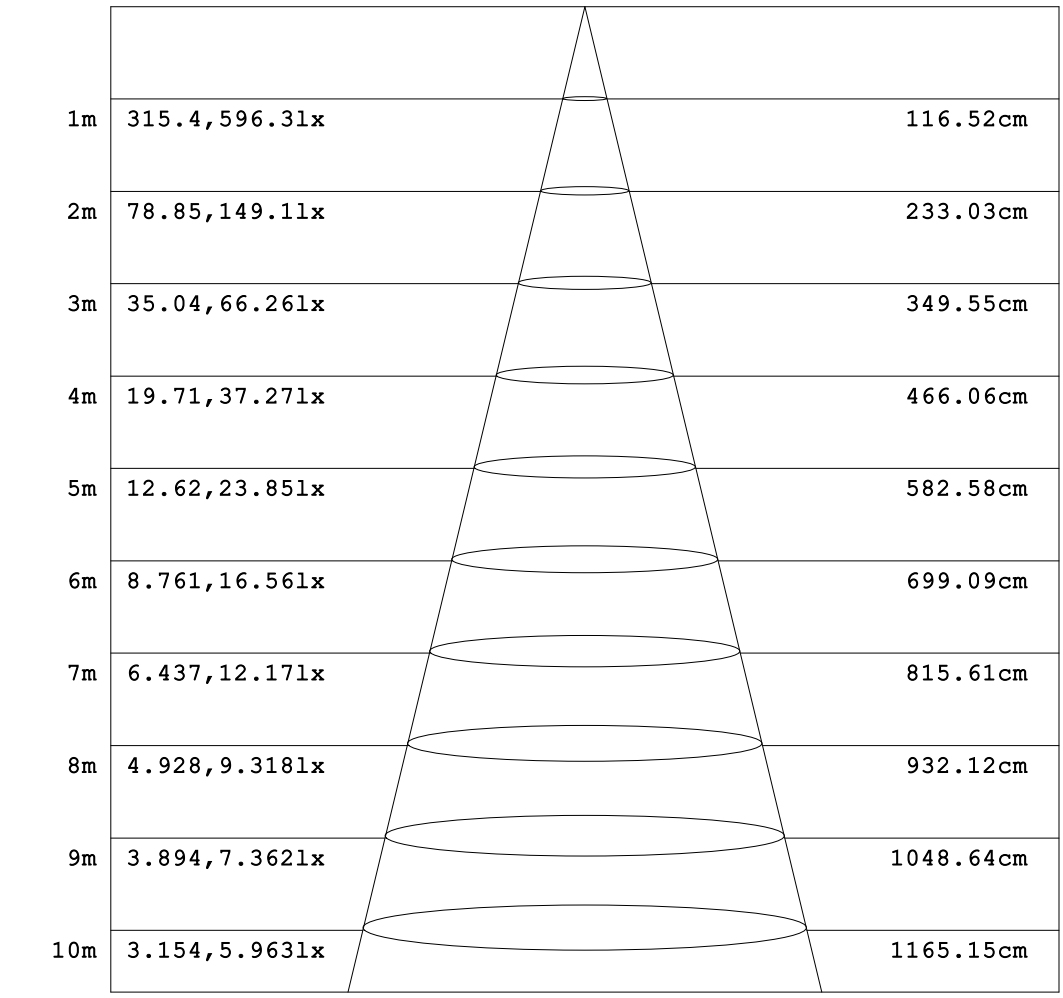


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-11-02

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:230.16V I:0.0506A P:5.1310W PF:0.4407 Freq:50.18Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:592.84x1 lm		
LumCAT: 1-1893-A2	Test NO: 20261102-C008	Report NO: 20261102-B008
LED HOLDER: 92.70.458.00	DIM.:	Lamp No.: 1
LampCAT: CITIZEN CLU703	MFR.: NATA	

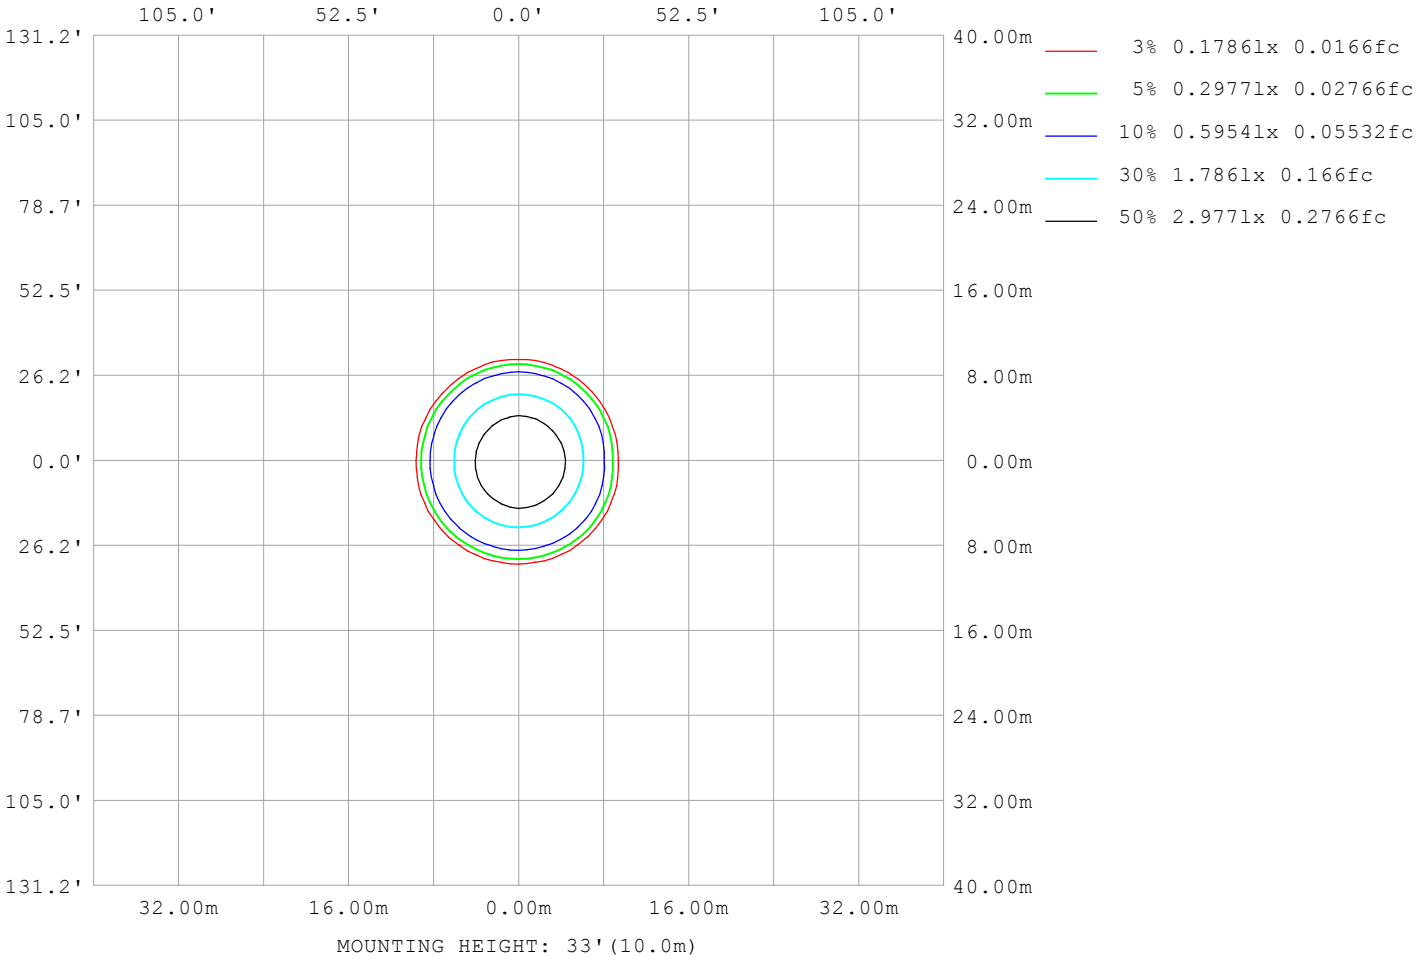

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-11-02

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:230.16V I:0.0506A P:5.1310W PF:0.4407 Freq:50.18Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:592.84x1 lm		
LumCAT: 1-1893-A2	Test NO: 20261102-C008	Report NO: 20261102-B008
LED HOLDER: 92.70.458.00	DIM.:	Lamp No.: 1
LampCAT: CITIZEN CLU703	MFR.: NATA	


AvgL	cd/m2
L_0~180(65)av	946
L_0~180(75)av	726
L_0~180(85)av	549
L_90~270(65)av	688
L_90~270(75)av	666
L_90~270(85)av	821
L_45(65)av	707
L_45(75)av	582
L_45(85)av	672

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-11-02

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

Planar Illuminance Curve

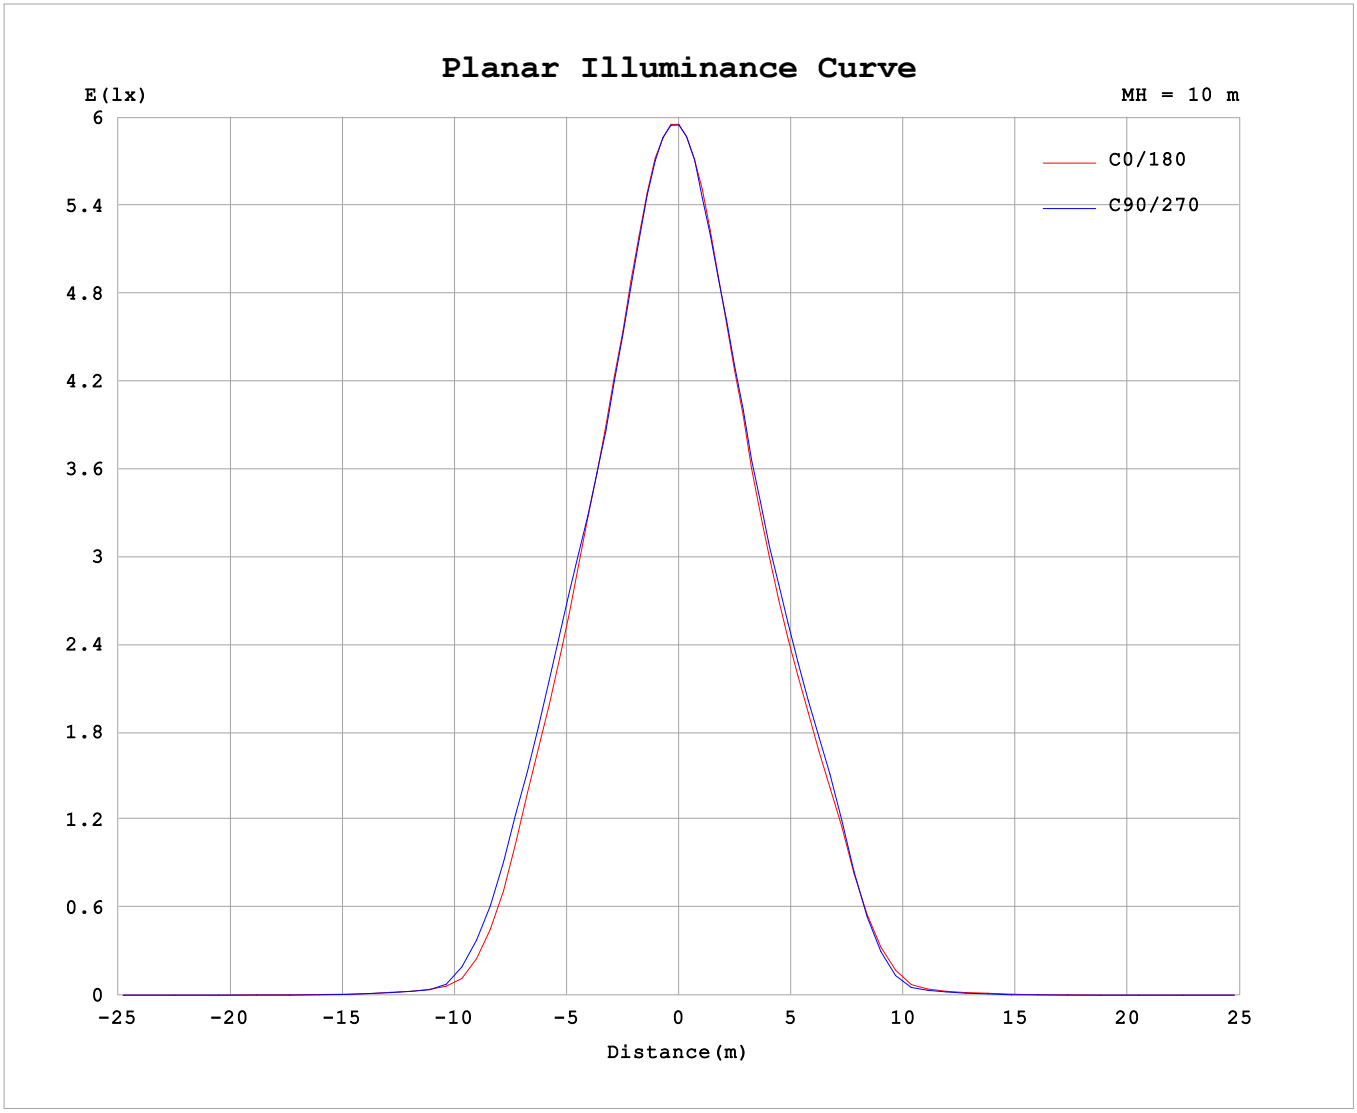

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-11-02

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.16V I:0.0506A P:5.1310W PF:0.4407 Freq:50.18Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:592.84x1 lm		
LumCAT: 1-1893-A2	Test NO: 20261102-C008	Report NO: 20261102-B008
LED HOLDER: 92.70.458.00	DIM.:	Lamp No.: 1
LampCAT: CITIZEN CLU703	MFR.: NATA	

Table--1 UNIT: cd

γ (DEG) \ C(DEG)	0	45	90	135	180	225	270	315
0	595	595	595	595	595	595	595	595
5	582	584	580	570	560	551	555	566
10	544	552	542	530	515	504	514	526
15	476	483	473	462	446	438	451	455
20	430	443	430	415	396	392	407	409
25	360	372	380	359	336	340	351	355
30	306	316	332	317	298	304	311	318
35	196	228	234	237	217	226	226	225
40	100	134	136	140	123	123	120	118
45	18.5	21.6	22.8	23.9	21.7	17.5	15.7	13.1
50	10.6	10.9	9.90	10.9	10.6	9.83	8.64	7.20
55	4.44	3.20	2.86	3.28	4.48	2.92	2.35	2.70
60	2.83	2.02	1.75	1.99	2.32	1.80	1.58	1.82
65	1.59	1.14	1.09	1.08	1.20	1.03	1.02	1.08
70	1.15	0.84	0.84	0.79	0.87	0.74	0.83	0.76
75	0.73	0.56	0.60	0.53	0.59	0.55	0.64	0.51
80	0.46	0.39	0.44	0.38	0.42	0.42	0.49	0.36
85	0.09	0.24	0.17	0.16	0.17	0.24	0.26	0.14
90	0.06	0.01	0.00	0.01	0.03	0.00	0.00	0.01

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-11-02

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks: