


table for unmentioned tolerance in the drawing (unit: mm)				punch angle tolerance in the drawing (unit:degree)		
> 0-5	> 5-30	> 30-90	> 90-150	0-10	10-50	50-120
±0.15	±0.2	±0.4	±0.5	±1°	±0.5°	±0.3°
> 150-250	> 250-400	> 400-700		120-250	250-360	360 above
±0.8	±1.5	±2		±0.2°	±0.166°	±0.085°

“\*” Marked for key control dimensions

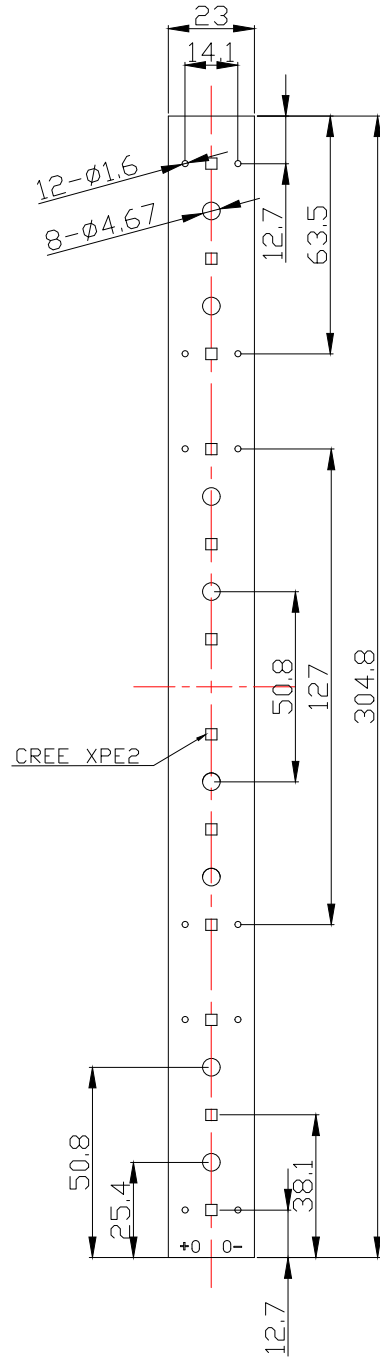

12-0071-S专用铝基板版本

铝基板焊灯珠厚2MM，不焊1.3MM LED:CREE XPE2

				P/N:		版本/REV
						KO
				产品名称	12-0071-S专用铝基板版本	
				客户代号	NT	
				客户编号		
标记	处数	更改内容		签名	更改日期	
Mark	Amended Times	Amended Content		Signature	Amended Date	
设计		制图		比例	1:1	
Designer		Drawing by		Proportion		
工艺		审核		视角		
Technology		Auditor		View	图档路径	
批准		日期	2022.1.22	页数	共1页 第1页	
Approval		Date		Page	The path of file	
				Nata®		