


table for unmentioned tolerance in the drawing (unit: mm)				punch angle tolerance in the drawing (unit:degree)		
>0-5	>5-30	>30-90	>90-150	0-10	10-50	50-120
±0.15	±0.2	±0.4	±0.5	±1°	±0.5°	±0.3°
>150-250	>250-400	>400-700		120-250	250-360	360 above
±0.8	±1.5	±2		±0.2°	±0.166°	±0.085°

“*” Marked for key control dimensions

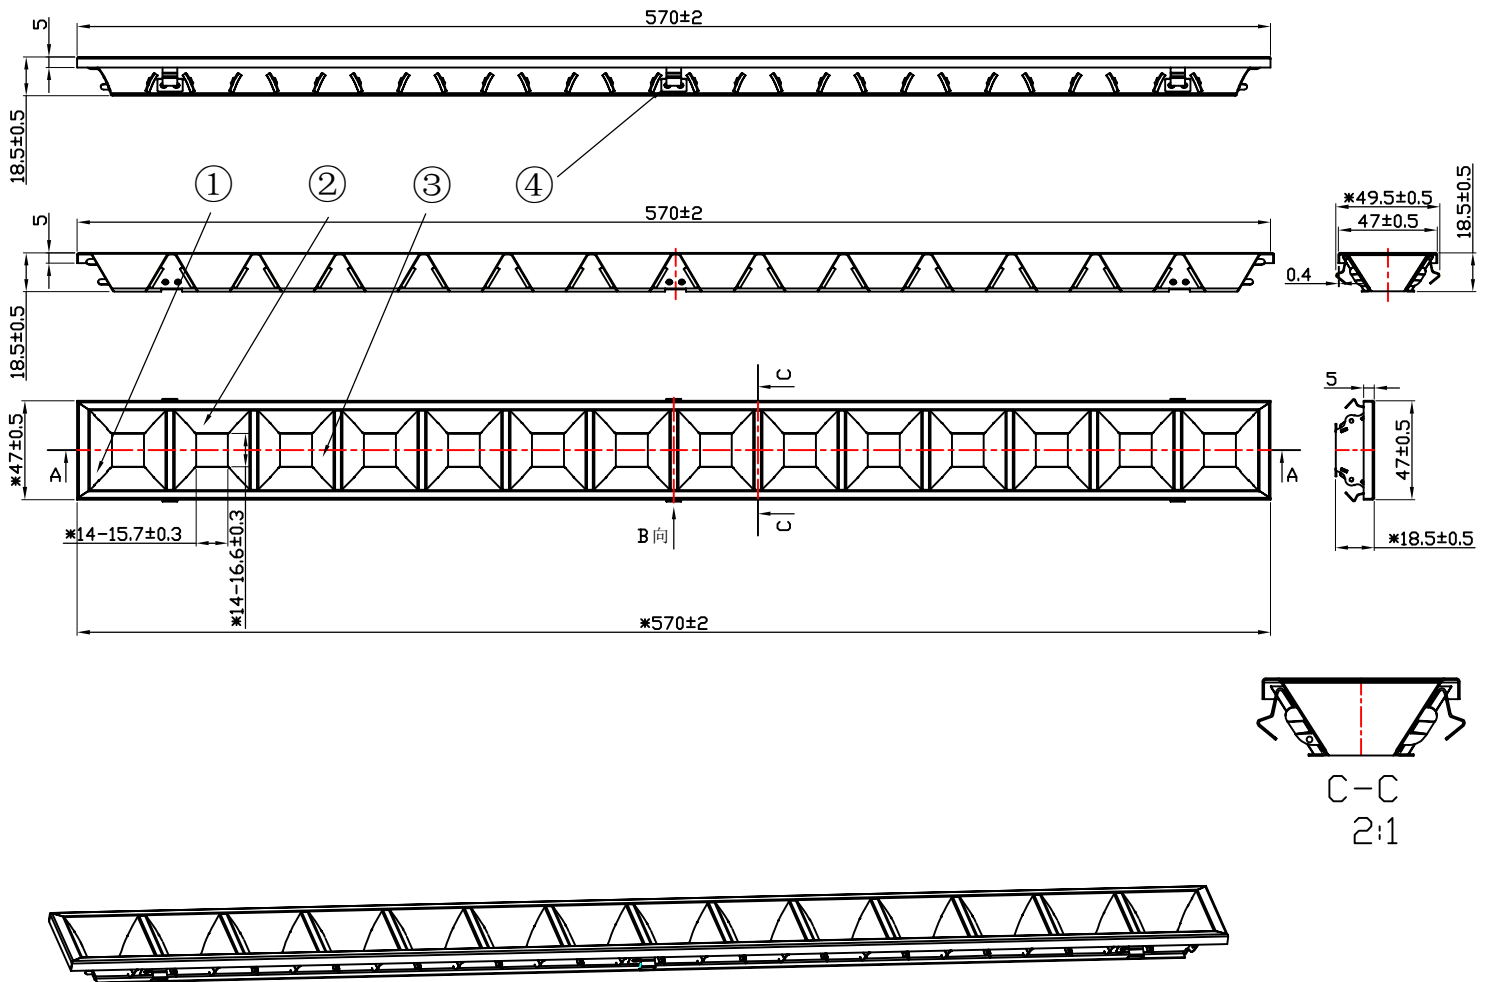

Light Source	LUMILEDS 5050	LUMILEDS 5050
PlasticHolder		
LENS	LM07126060EM	LM07126080EM
Design Angle	60° ±5°	80° ±5°
Measured Angle	54.6° X56.8°	75.2° X81.8°
Efficiency		

物料名称	物料编号	区别描述
12-0080-M	91.12.0080.000	1.Material: t=0.4mm 1100AL H16. 2.Surface treatment: Matt white coating
12-0080-M2	91.12.0080.001	1.Material: t=0.4mm Glossy aluminium/Glossy . 2.Surface treatment: *
12-0080-M3	91.12.0080.002	1.Material: t=0.4mm 97% high reflectance aluminum/Frosted surface 2.Surface treatment: *
12-0080-M4	91.12.0080.003	1.Material: t=0.4mm 1100AL H16. 2.Surface treatment: Matt black coating
12-0080-M5	91.12.0080.004	1.Material: t=0.4mm Matte aluminium/Matte. 2.Surface treatment: *

Technical requirements:

- 1.Material: t=0.4mm 1100AL H16.
- 2.Surface treatment: Matt white coating 70um-100um.
- 3.Drawing size does not include powder thickness.
- 4.Product intolerance reference intolerance table.

								P/N:	91.12.0080.000	版本/REV	K3
								产品名称	12-0080-M		
								客户代号	NT		
								客户编号			
标记	处数	更改内容	签名	更改日期							