
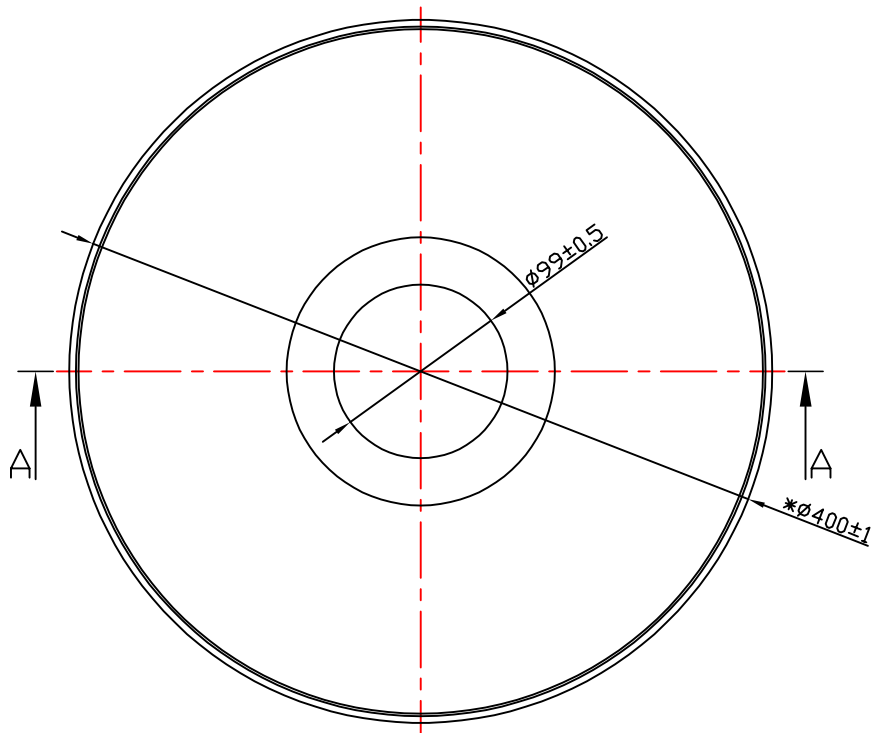


| table for unmentioned tolerance in the drawing (unit: mm) | | | punch angle tolerance in the drawing (unit:degree) | | |
|-----------------------------------------------------------|---------|---------|----------------------------------------------------|---------|-----------|
| 0-5 | 5-30 | 30-120 | 0-10 | 10-50 | 50-120 |
| ±0.15 | ±0.2 | ±0.5 | ±1° | ±0.5° | ±0.3° |
| 120-250 | 250-400 | 400-700 | 120-250 | 250-360 | 360 above |
| ±0.8 | ±1.5 | ±2 | ±0.2° | ±0.166° | ±0.083° |

"<" Marked for key control dimensions

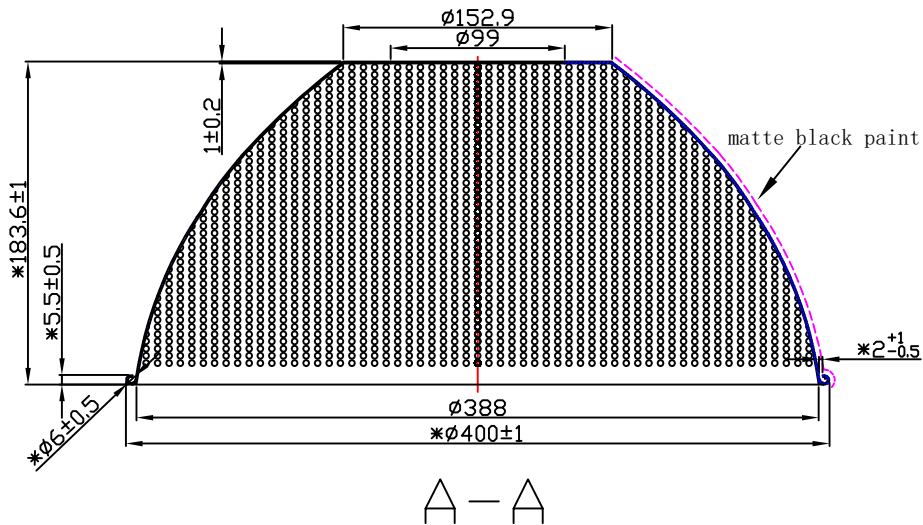

Technical requirements:

1. Material: 1.0mm 1070AL.
2. Surface treatment: standard light+Outer surface with painting.
3. Product tolerance reference tolerance table.

| | | | | | | | | |
|-----------------|---------------|-----------------|------------|----------------|----------------------|--|---------------------------------------------------------|----------------|
| | | | | | Engineering drawings | | Nata[®] NATA Lighting Co.,Ltd | |
| | | | | | | | Customer Item | ø400工矿灯反射器 |
| | | | | | | | Customer Code | NT |
| | | | | | | | Product Number | 91.15.0025.000 |
| | | | | | | | Product Name | 15-0025-K |
| Mark | Amended Times | Amended Content | | Signature | Amended Date | | | |
| Control Version | AO | Design Version | KO | Client Version | | | | |
| Designer | | Drawing by | | Proportion | 1:1 | | | |
| Technology | | Auditor | | View | | | | |
| Approval | | Date | 2021.11.05 | Page | Total Page | | | |