

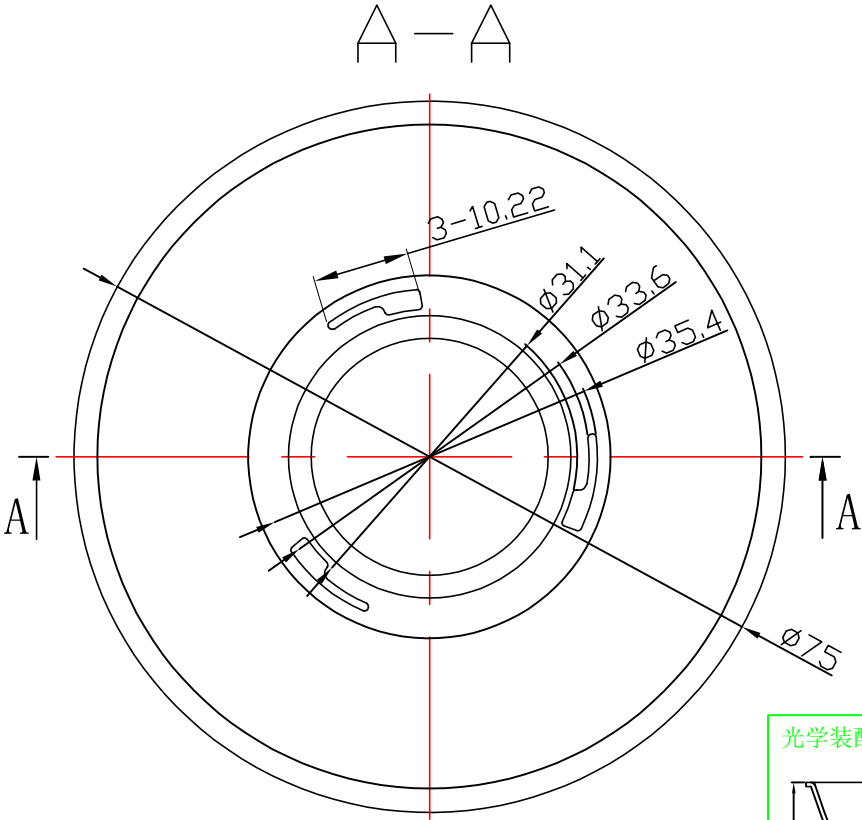


table for unmentioned tolerance in the drawing (unit: mm)			punch angle tolerance in the drawing (unit:degree)		
0-5	5-30	30-120	0-10	10-50	50-120
±0.15	±0.2	±0.5	±1°	±0.5°	±0.3°
120-250	250-400	400-700	120-250	250-360	360 above
±0.8	±1.5	±2	±0.2°	±0.166°	±0.083°

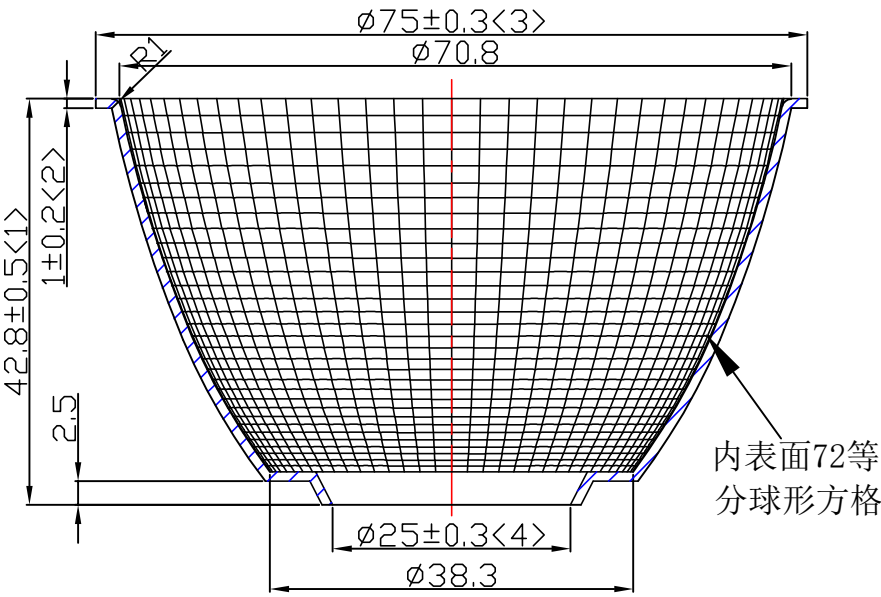

Light Source	OSRAM OPTO SOLERIQ S13 LES13
PlasticHolder	99. 02. 73. 172
Metal Adaptar	92. 76. 365. 00
Design Angle	26° ±3°
Measured Angle	25.7°
Efficiency	

光学装配示意图

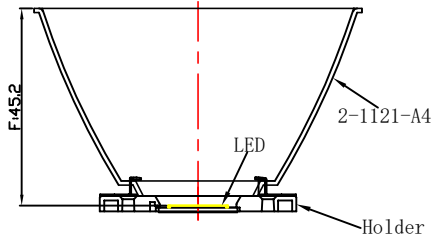

				Material:T=1.0 1090AL				Nata® NATA Lighting Co.,Ltd	
Mark	Amended Times	Amended Content		Signature	Amended Date			Customer Item	
Controll Version		AO	Design Version	KO	Client Version			Customer Code	NT
Designer		Drawing by		Proportion	1:1			Product Number	
Technology		Auditor		View				Product Name	2-1121-A4
Approval		Date	2019. 07. 05	Page	Total_ Page_				