



table for unmentioned tolerance in the drawing (unit: mm)			punch angle tolerance in the drawing (unit: degree)		
0-5	5-30	30-120	0-10	10-50	50-120
±0.15	±0.2	±0.5	±1°	±0.5°	±0.3°
120-250	250-400	400-700	120-250	250-360	360 above
±0.8	±1.5	±2	±0.2°	±0.166°	±0.083°

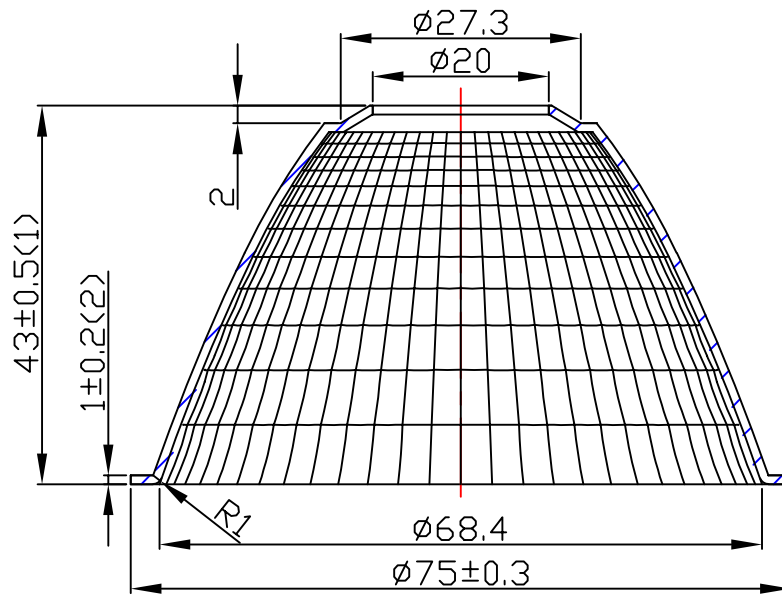

A-A

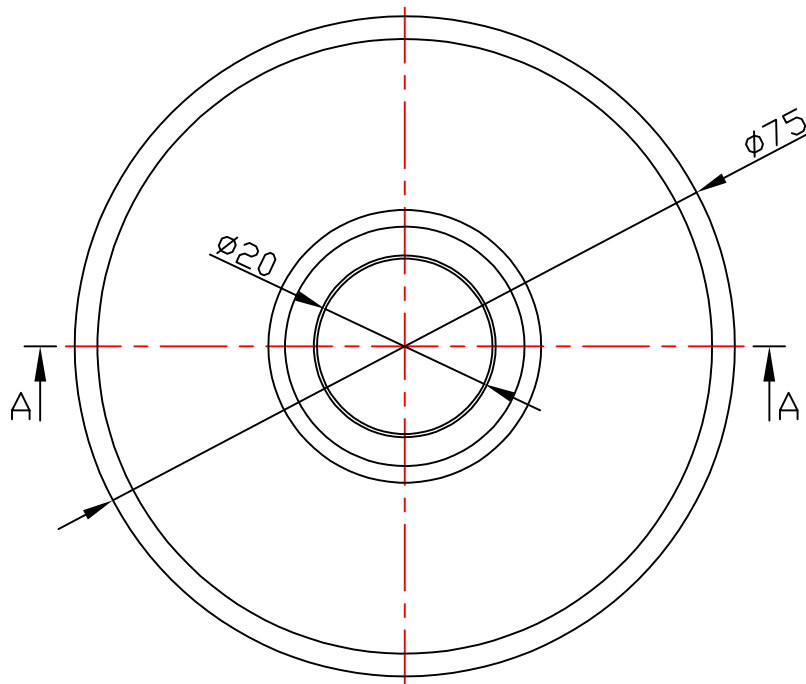

Light Source	CBAC-88-36185 22W LES18.5
PlasticHolder	H48185AC
Metal Adaptor	
Design Angle	23° ±3°
Measured Angle	23°
Efficiency	

						Material:T=1.0 1090AL				Nata® NATA Lighting Co.,Ltd				
Mark	Amended Times	Amended Content			Signature	Amended Date					Customer Item			
Controll Version	AO	Design Version	K0	Client Version							Customer Code	NT		
Designer		Drawing by		Proportion	1:1						Product Number			
Technology		Auditor		View							Product Name	2-1430-E		
Approval		Date	2018.03.16	Page	Total Page									