



Item NO.	Product Name	Product NO.	QTY	Page	Description
①	EW76.750.10 固定主环	97.76.750.10	1	4	t=1.0mm 1060AL, Andoizing.
②	2-2531-H		1	2	t=1.0mm 1090AL, Andoizing.
③	EW-63防尘片	97.70.379.00	1	3	PC

table for unmentioned tolerance in the drawing (unit: mm)				punch angle tolerance in the drawing (unit: degree)		
> 0-5	> 5-30	> 30-90	> 90-150	0-10	10-50	50-120
±0.15	±0.2	±0.4	±0.5	±1°	±0.5°	±0.3°
> 150-250	> 250-400	> 400-700		120-250	250-360	360 above
±0.8	±1.5	±2		±0.2°	±0.166°	±0.085°

* Marked for key control dimensions

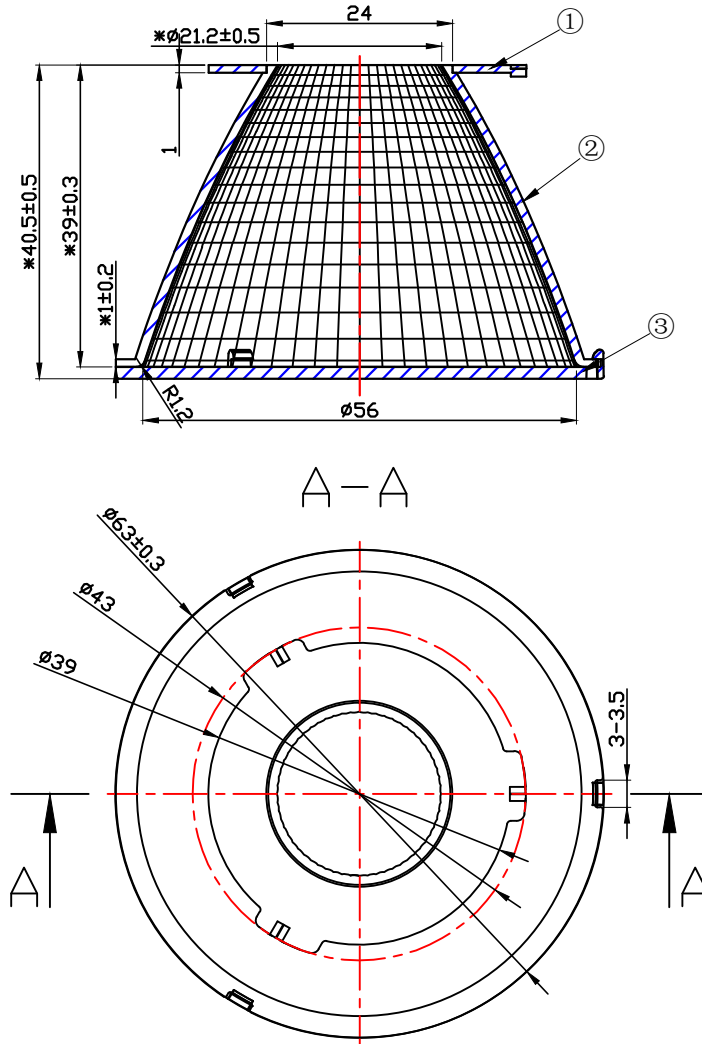

Light Source	LUMILEDS 1205
Plastic Holder	92.70.135.00
Metal Adaptor	
Design Angle	25° ±3°
Measured Angle	
Efficiency	



Technical requirements:

1. Material: AL.
2. Surface treatment: Andoizing..
3. Product untolerance reference untolerance table.

				P/N: 91.02.2530.000		版本/REV KO	
				产品名称 Product Name		2-2530-L	
				客户代号 Customer Code		NT	
				客户编号 Customer Item		EW-D63-25D	
标记 Mark	处数 Issued Times	更改内容 Amended Content	签名 Signature	更改日期 Amended Date	工程图 Engineering drawings		
设计 Designer	制图 Drawing by	审核 Auditor	比例 Proportion	视角 View	图档路径 The path of file		
批准 Approval	日期 Date	2022.07.15	页数 Page	共1页 第1页	Nata®		