

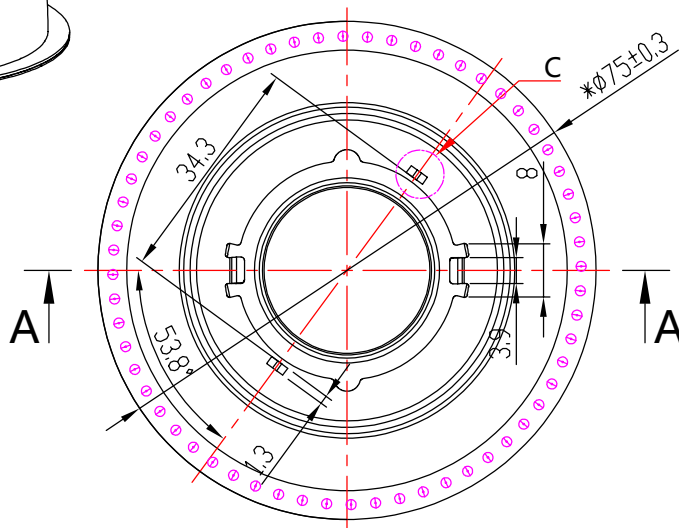
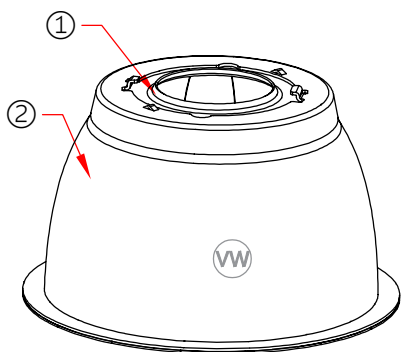
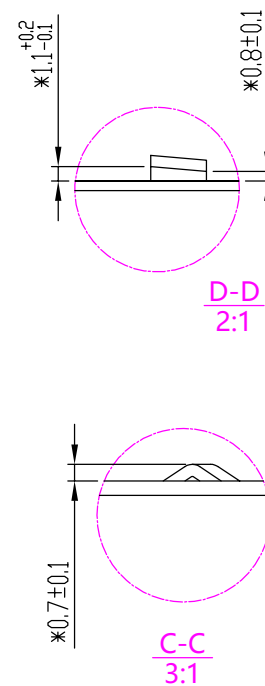


参考图纸

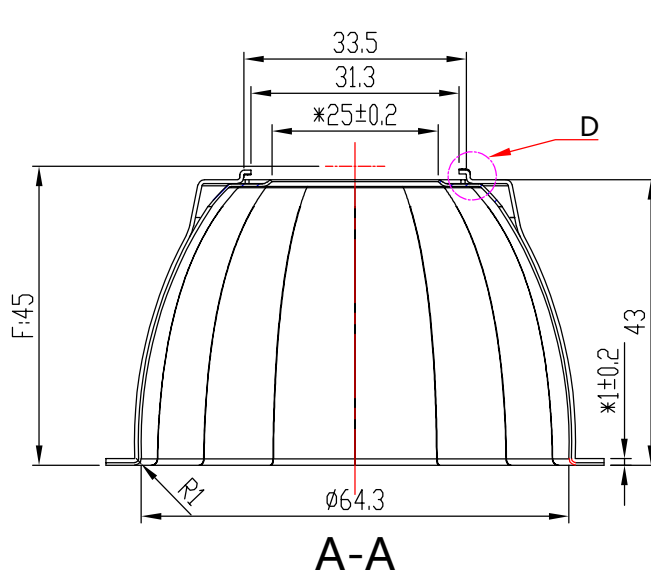

Light Source	CITIZEN CLU038 LES14.5
Plastic Holder	92.70.411.00
Metal Adapter	
Design Angle	60°±5°
Measured Angle	
Efficiency	

OPTICAL ASSEMBLY DIAGRAM

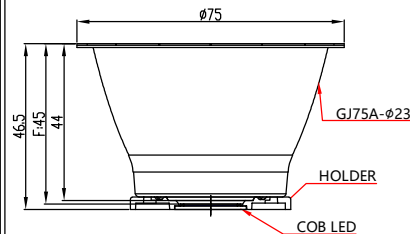

技术要求:

- 1."*"标记为重点控制尺寸。
- 2.未注公差按公差表。
- 3.产品未注圆角与拔模斜度按3D。
- 4.产品外观按《N-SIP-QA-04 铝反光杯检验标准》。

PRODUCT BOM				
NO.	PRODUCT NAME	PRODUCT CODE	QUANTITY	MATERIAL/FINISH
①	2-2891-L	94.02.2891.000	1	T=0.4mm MIRO 98AX20
②	2-2892-A	94.02.2892.000	1	T=0.6mm 1060AL H22/洗油

		Nata®		版本 VERSIONS	
				V1.1_02	
DIMENSION TOLERANCE TABLE(UNLESS OTHERWISE STATED) 未注尺寸公差表				产品编码 PRODUCT CODE	91.02.2890.001
> 0-5 > 5-30 > 30-90 > 90-150 > 150-250 > 250-400 > 400-700				产品名称 PRODUCT NAME	2-2890-L2
> ±0.5 ±0.2 ±0.4 ±0.5 ±0.8 ±1.5 ±2					
PUNCH TOLERANCE TABLE (UNLESS OTHERWISE STATED) (ANGLE) 角度公差表 (单位: 度)				客户代号 CUSTOMER ID	NT
> 0-10 > 10-50 > 50-120 > 120-250 > 250-360					
> ±1° ±0.5° ±0.3° ±0.2° ±0.166°				客户编号 CUSTOMER CODE	GJ75A-60D-25H43 反光杯
部件产品图 COMPONENT PRODUCT DRAWING				单位 UNIT	
				mm	