



table for unmentioned tolerance in the drawing (unit: mm)			punch angle tolerance in the drawing (unit:degree)		
0-5	5-30	30-120	0-10	10-50	50-120
±0.15	±0.2	±0.5	±1°	±0.5°	±0.3°
120-250	250-400	400-700	120-250	250-360	360 abov
±0.8	±1.5	±2	±0.2°	±0.166°	±0.083°

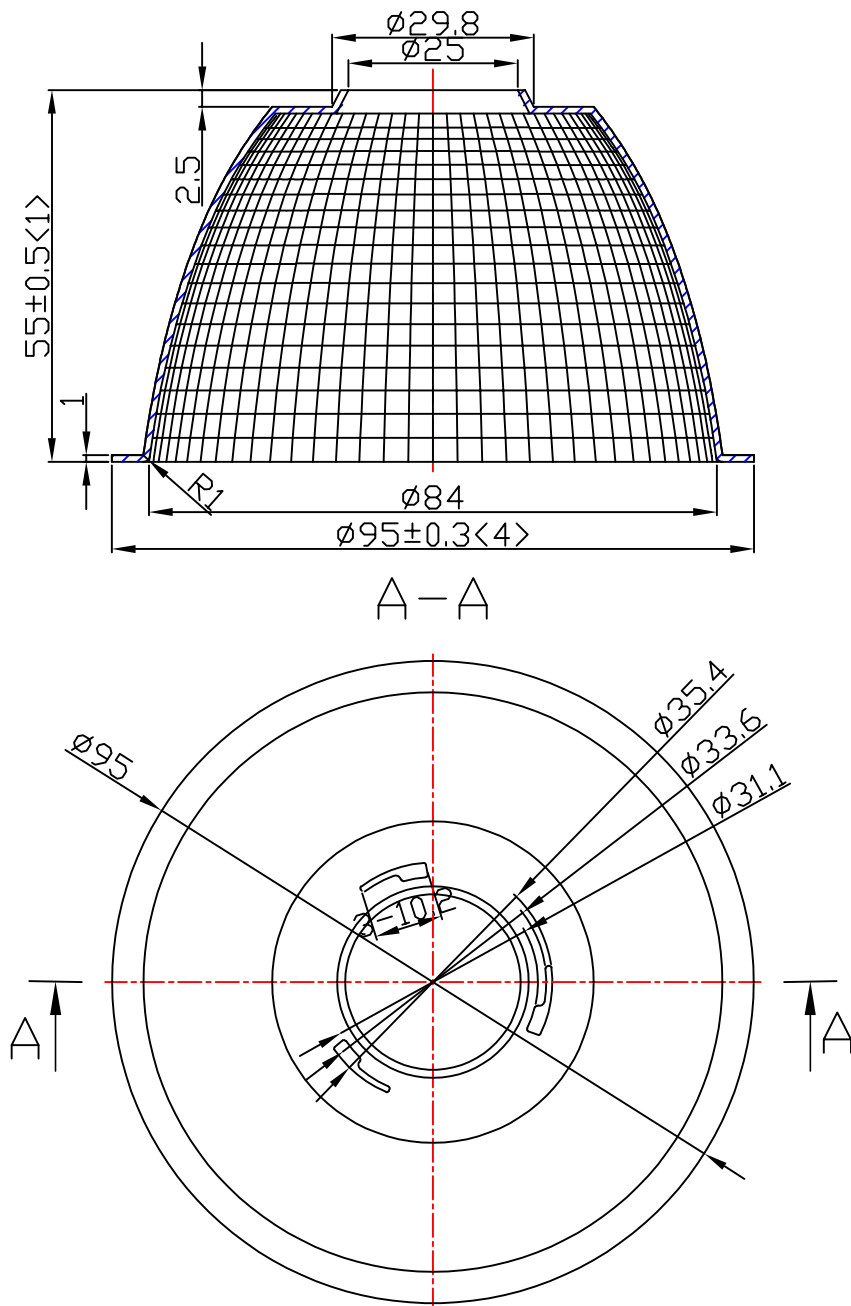

Light Source	OSRAM OPTO SOLERIQ S13
PlasticHolder	99.02.73.17:
Metal Adaptor	92.76.365.0C
Design Angle	36° ±3°
Measured Angle	38.7°
Efficiency	

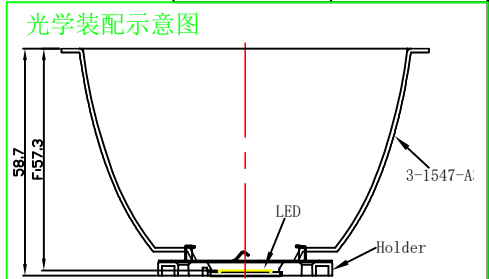

						Material:T=1.0 1090AL				Nata® NATA Lighting Co.,Ltd		
										Customer Item		
Mark	Amended Times	Amended Content			Signature	Amended Date					Customer Code	NT
Control Version		A0	Design Version	K0	Client Version						Product Number	
Designer			Drawing by		Proportion	1:1					Product Name	3-1547-A3
Technology			Auditor		View							
Approval			Date	2017. 09. 06	Page	Total_ Page_						