



table for unmentioned tolerance in the drawing (unit: mm)			punch angle tolerance in the drawing (unit:degree)		
0-5	5-30	30-120	0-10	10-50	50-120
±0.15	±0.2	±0.5	±1°	±0.5°	±0.3°
120-250	250-400	400-700	120-250	250-360	360 above
±0.8	±1.5	±2	±0.2°	±0.166°	±0.083°

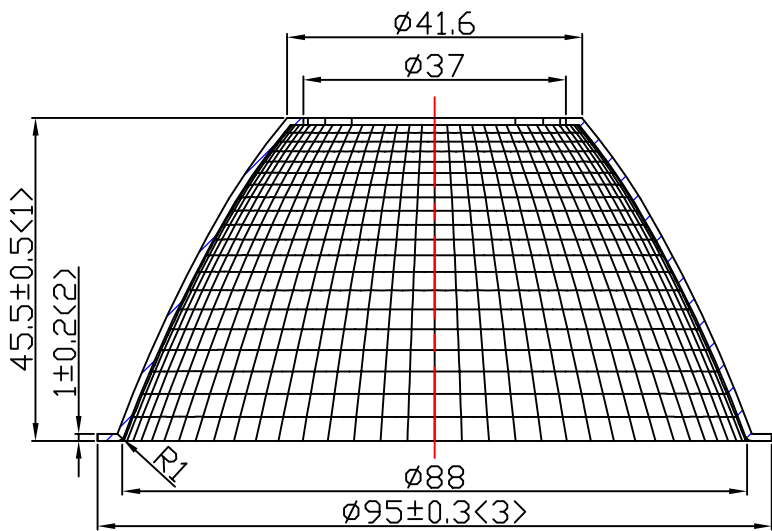

A — A

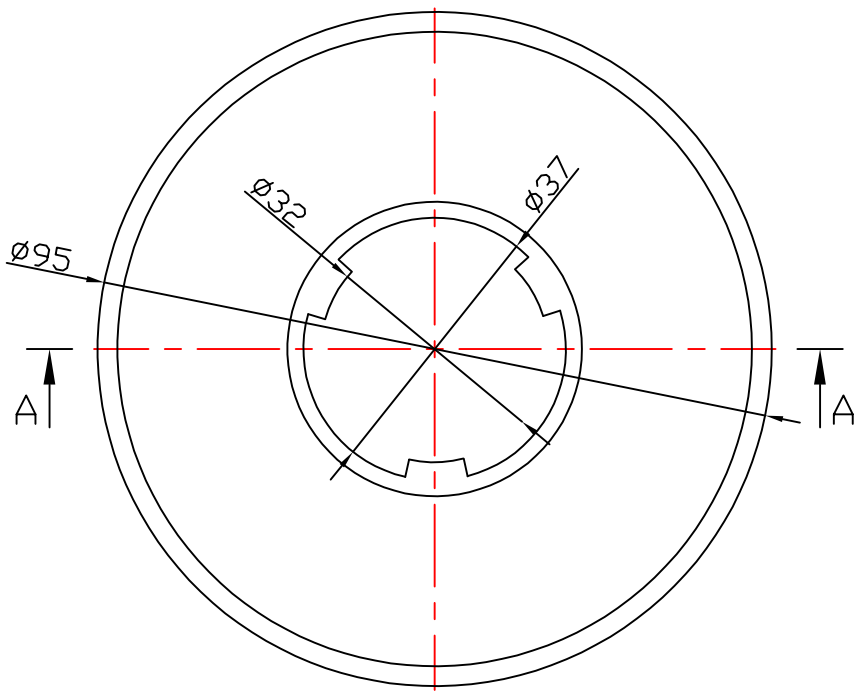

Light Source	BRIDGELUX Vero 29
PlasticHolder	
Metal Adaptar	92.76.227.00
Design Angle	26° ±3°
Measured Angle	28.8°
Efficiency	

						Material:T=1.0 1090AL				Nata® NATA Lighting Co.,Ltd	
										Customer Item	
Mark	Amended Times	Amended Content			Signature	Amended Date				Customer Code	NT
Controll Version		AO	Design Version	K0	Client Version					Product Number	
Designer			Drawing by		Proportion	1:1				Product Name	3-1640-E
Technology			Auditor		View						
Approval			Date	2018. 03. 16	Page	Total_ Page_					