
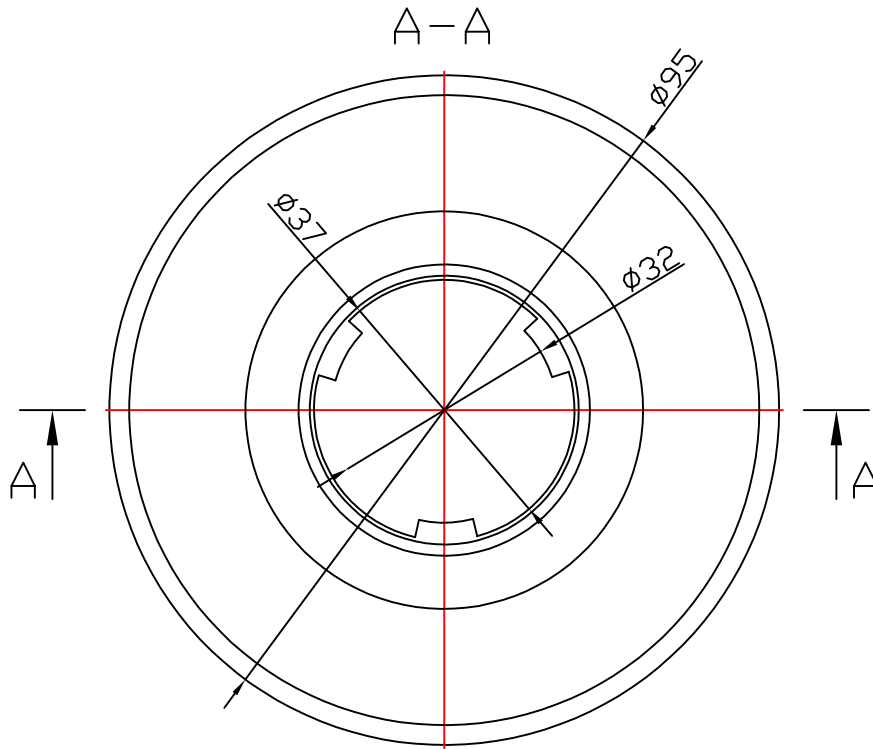


table for unmentioned tolerance in the drawing (unit: mm)			punch angle tolerance in the drawing (unit:degree)		
0-5	5-30	30-120	0-10	10-50	50-120
±0.15	±0.2	±0.5	±1°	±0.5°	±0.3°
120-250	250-400	400-700	120-250	250-360	360 above
±0.8	±1.5	±2	±0.2°	±0.166°	±0.083°

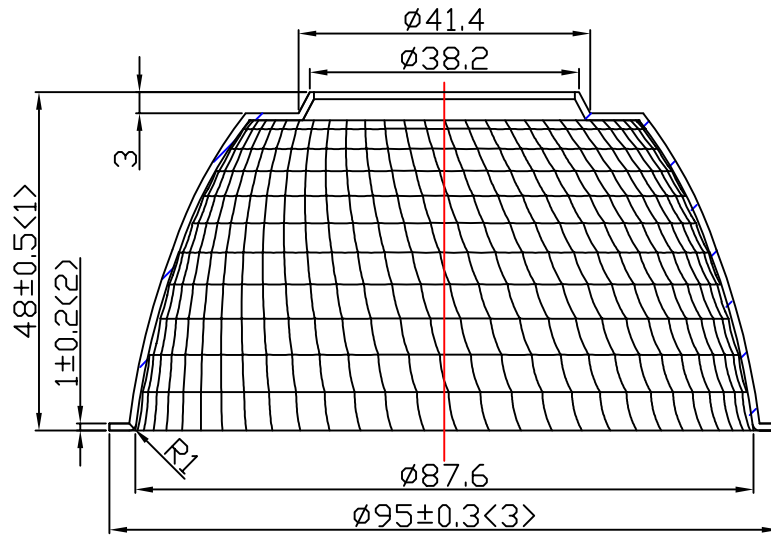

Light Source	BRIDGELUX Vero 29
PlasticHolder	
Metal Adapter	92.76.227.00
Design Angle	55° ±5°
Measured Angle	55.8°
Efficiency	

						Material:T=1.0 1090AL					Nata® NATA Lighting Co.,Ltd	
											Customer Item	
Mark	Amended Times	Amended Content				Signature	Amended Date				Customer Code	NT
Controll Version		A0	Design Version	K0	Client Version							
Designer			Drawing by		Proportion	1:1				Product Number		
Technology			Auditor		View					Product Name	3-1642-E	
Approval			Date	2018. 03. 16	Page	Total_ Page_						