




table for unmentioned tolerance in the drawing (unit: mm)			punch angle tolerance in the drawing (unit: degree)		
0-5	5-30	30-120	0-10	10-50	50-120
±0.15	±0.2	±0.5	±1°	±0.5°	±0.3°
120-250	250-400	400-700	120-250	250-360	360 abov
±0.8	±1.5	±2	±0.2°	±0.166°	±0.083°

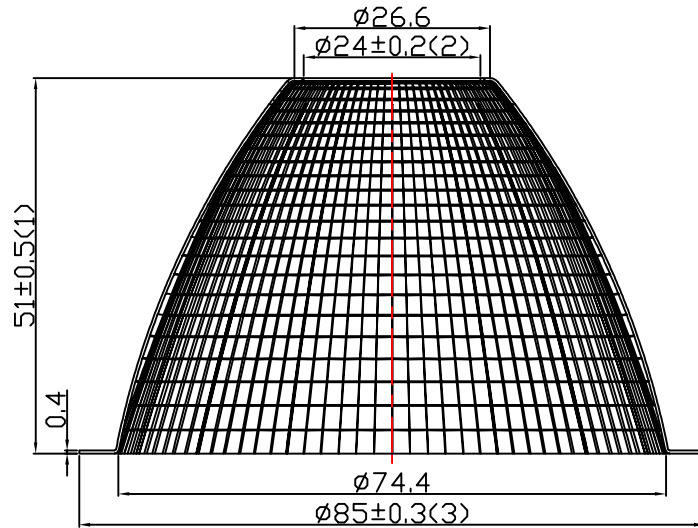


A — A

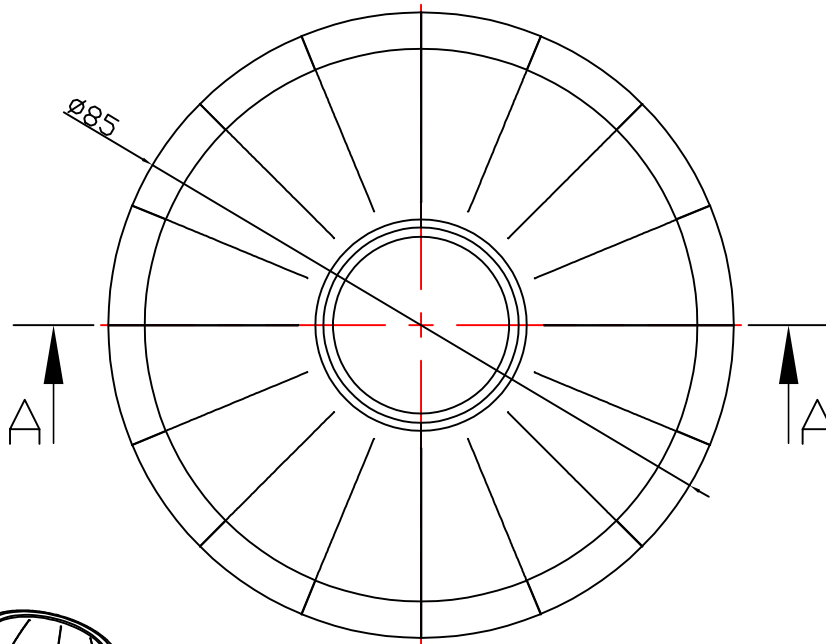

Light Source	LUMILEDS Luxeon Cob 1208
Plastic Holder	92.70.135.00
Metal Adapter	
Design Angle	15° ±3°
Measured Angle	15.6°
Efficiency	

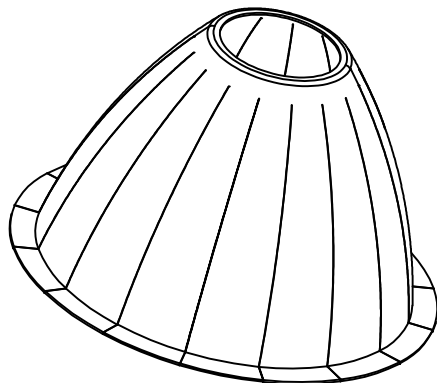

光学装配示意图

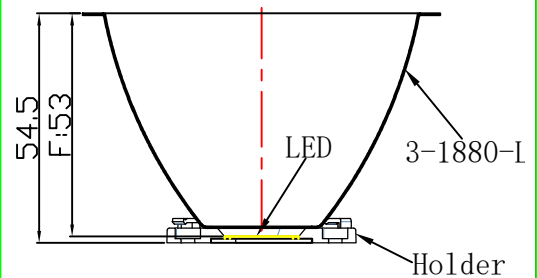

						Material:T=0.4					Nata® NATA Lighting Co.,Ltd	
						MIRO 98AX4						
Mark	Amended Times	Amended Content				Signature	Amended Date				Customer Item	
		Controll Version	A0	Design Version	K0	Client Version					Customer Code	
		Designer		Drawing by		Proportion	1:1				Product Number	
		Technology		Auditor		View					Product Name	
		Approval		Date		2018.03.16	Page	Total_ Page_				3-1880-L