




table for unmentioned tolerance in the drawing (unit: mm)			punch angle tolerance in the drawing (unit:degree)		
0-5	5-30	30-120	0-10	10-50	50-120
±0.15	±0.2	±0.5	±1°	±0.5°	±0.3°
120-250	250-400	400-700	120-250	250-360	360 above
±0.8	±1.5	±2	±0.2°	±0.166°	±0.083°

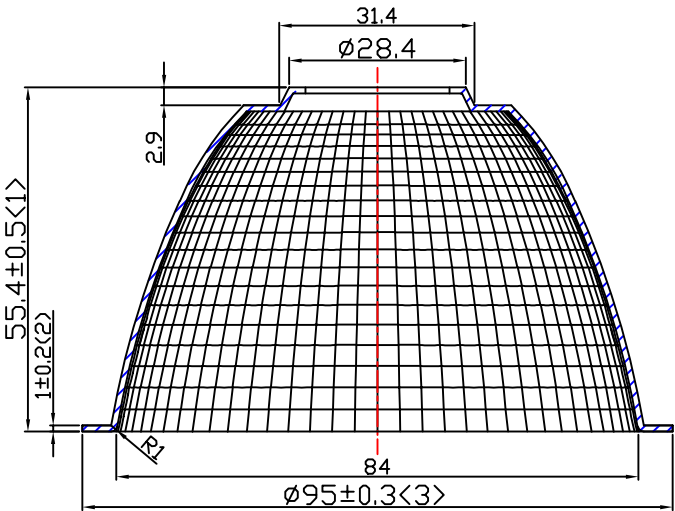

A-A

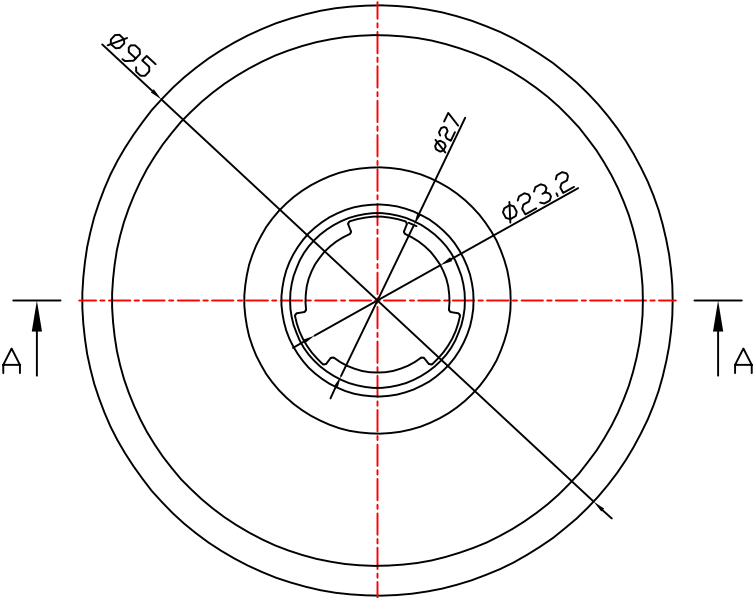

Light Source	CREE CXA 1830
PlasticHolder	99. 02. 73. 18C
Metal Adaptar	92. 76. 323. 00
Design Angle	25° ±3°
Measured Angle	26. 2°
Efficiency	

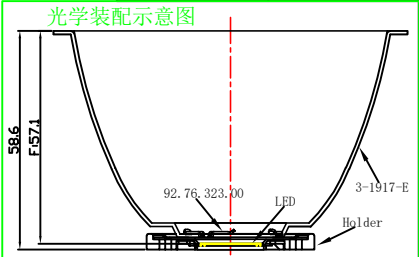

						Material:T=1.0 1090AL				Nata® NATA Lighting Co.,Ltd			
Mark	Amended Times	Amended Content			Signature	Amended Date					Customer Item		
Controll Version		AO	Design Version	KO	Client Version						Customer Code	NT	
Designer			Drawing by		Proportion	1:1					Product Number		
Technology			Auditor		View								
Approval			Date	2016. 09. 23	Page	Total_ Page_					Product Name	3-1917-E	