




table for unmentioned tolerance in the drawing (unit: mm)			punch angle tolerance in the drawing (unit: degree)		
0-5	5-30	30-120	0-10	10-50	50-120
±0.15	±0.2	±0.5	±1°	±0.5°	±0.3°
120-250	250-400	400-700	120-250	250-360	360 above
±0.8	±1.5	±2	±0.2°	±0.166°	±0.083°

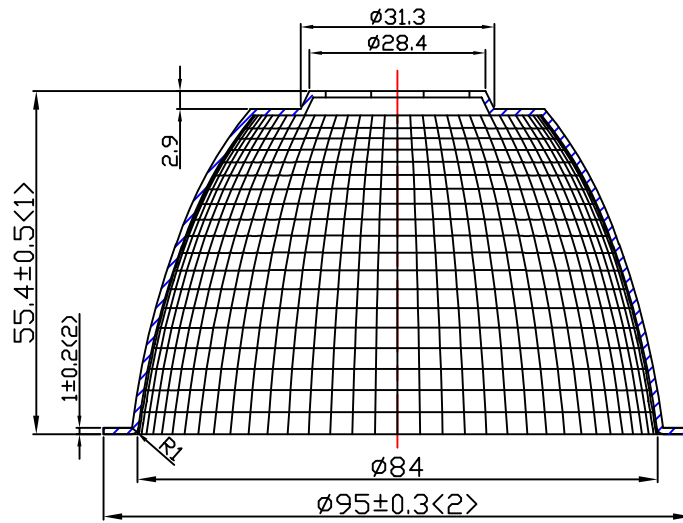

A—A

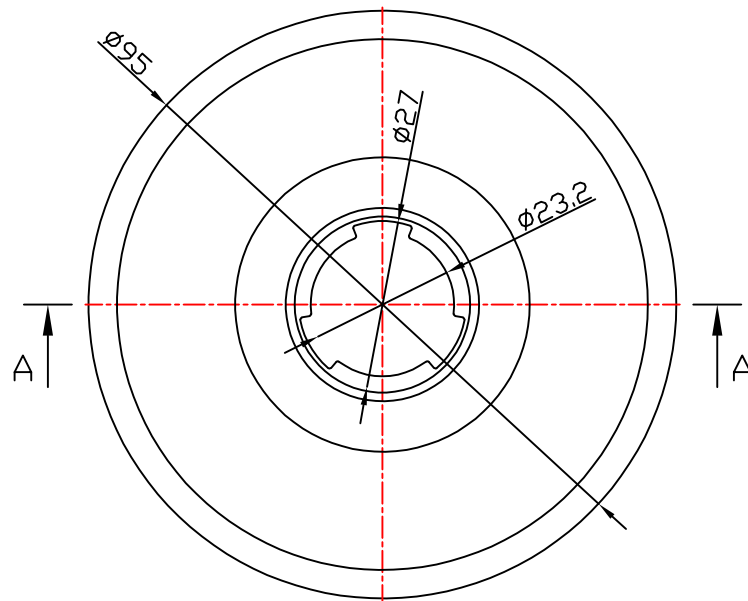

Light Source	CREE CXA 1830
Plastic Holder	99.02.73.180
Metal Adapter	92.76.323.00
Design Angle	38° ±3°
Measured Angle	38.3°
Efficiency	

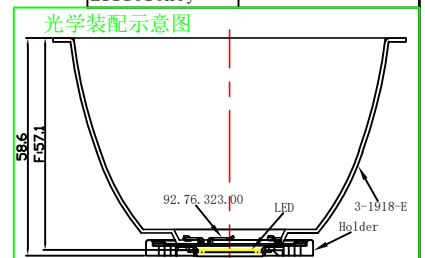

						Material:T=1.0 1090AL				Nata® NATA Lighting Co.,Ltd			
Mark	Amended Times	Amended Content			Signature	Amended Date						Customer Item	
Controll Version		A0	Design Version	K0	Client Version							Customer Code	NT
Designer			Drawing by		Proportion	1:1						Product Number	
Technology			Auditor		View							Product Name	3-1918-E
Approval			Date	2016.09.28	Page	Total Page							