



table for unmentioned tolerance in the drawing (unit: mm)			punch angle tolerance in the drawing (unit:degree)		
0-5	5-30	30-120	0-10	10-50	50-120
±0.15	±0.2	±0.5	±1°	±0.5°	±0.3°
120-250	250-400	400-700	120-250	250-360	360 above
±0.8	±1.5	±2	±0.2°	±0.166°	±0.083°

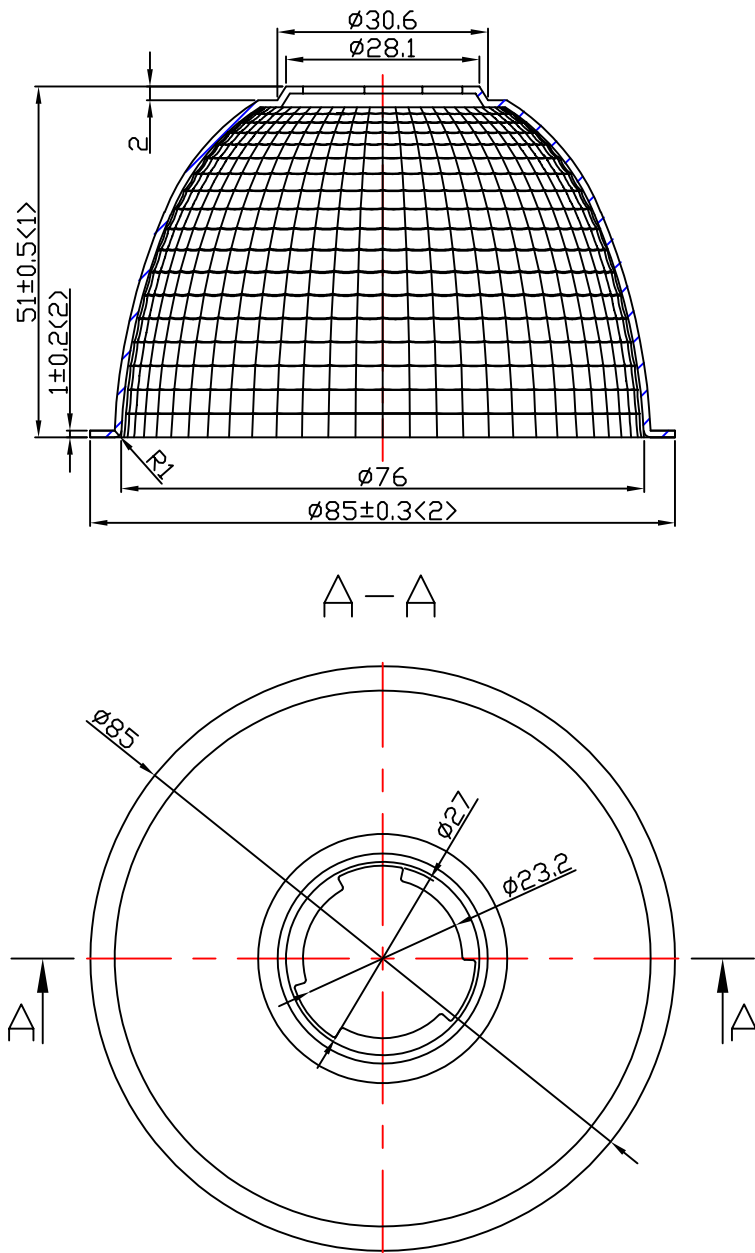

Light Source	CREE CXA1830
PlasticHolder	99.02.73.180
Metal Adaptor	92.76.323.00
Design Angle	58° ±5°
Measured Angle	57.4°
Efficiency	

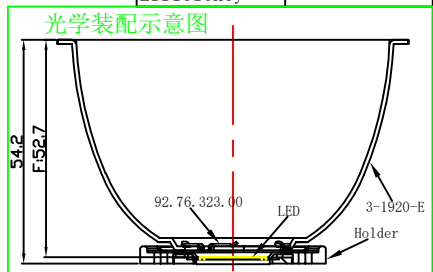

						Material:T=1.0 1090AL					Nata® NATA Lighting Co.,Ltd		
Mark	Amended Times	Amended Content			Signature	Amended Date						Customer Item	
Controll Version		A0	Design Version	K1	Client Version							Customer Code	NT
Designer			Drawing by		Proportion	1:1						Product Number	
Technology			Auditor		View							Product Name	3-1920-E
Approval			Date	2018.01.18	Page	Total_ Page_							