

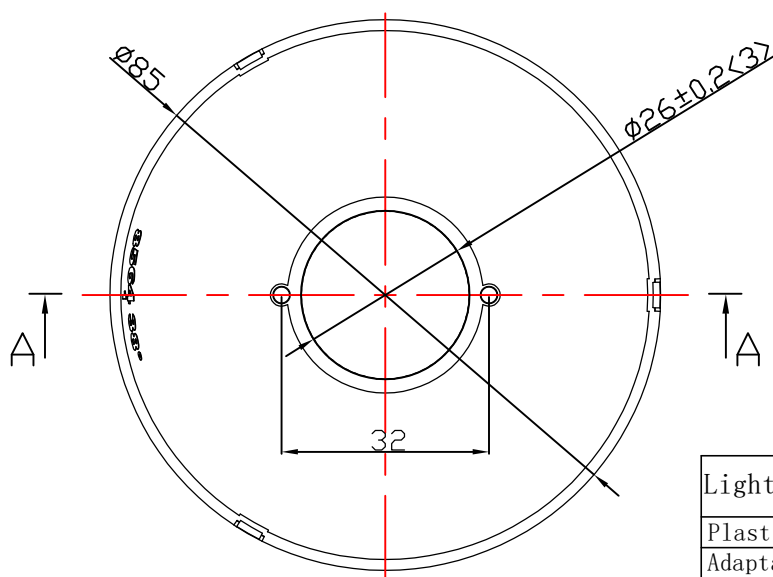
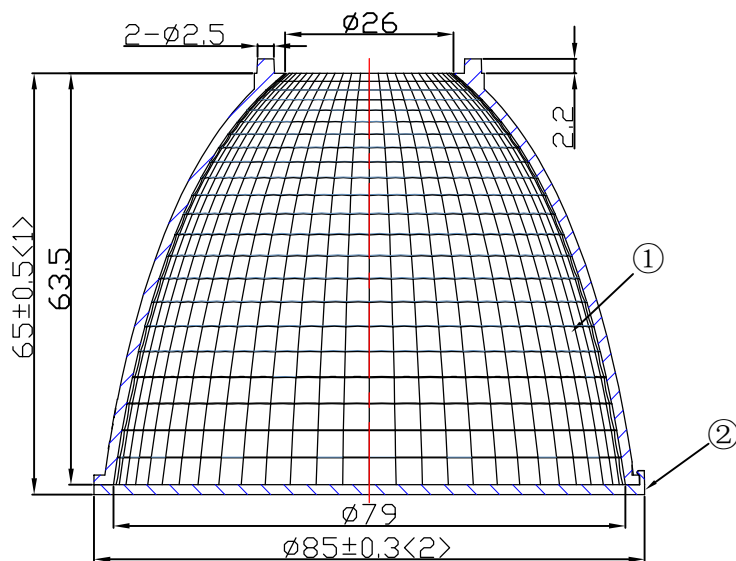


table for unmentioned tolerance in the drawing (unit: mm)					
0-5	5-30	30-120	120-250	250-400	400-700
±0.15	±0.2	±0.5	±0.8	±1.5	±2

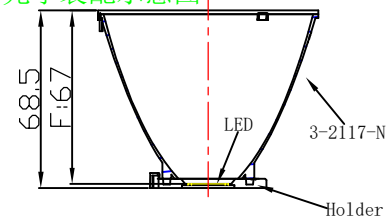

Light Source	LUMILEDS LUXEON CoB 1205
PlasticHolder	92.70.135.00
Adaptar	
Design Angle	$36^{\circ} \pm 3^{\circ}$
Measured Angle	34.4°
Efficiency	

光学装配示意图

[illegible]