



NATA LIGHTING CO.,LTD
www.nata.cn
Email:info@nata.cn
Tel:+86 0750-377 0000(10 lines) Fax:+86 0750-377 1111
Address:380JinOu Road,Gaoxin Zone,Jiang Men City,Guangdong,China

Nata

Client: NT

LumCAT: 3-2998-LM

Luminaire: 92.70.412.00 LED HOLDER

Report No: 20260202-B002

Ballast type: DC

Test No: 20260202-C002

Voltage(V): 36.960

LampCAT: CITIZEN CLU038 LES14.5

Current(A): 0.718

Lamp flux(lm): 3615.0

Power (W): 26.530

Number of Lamps: 1

PF: 0.000

Length(mm): 92

Width(mm): 92

Phm Type: C

Height(mm): 49

Photometric Results

Lumens(lm): 3530.88, Efficiency(%): 97.67% , Luminous Efficacy(lm/W): 133.09

Central intensity(cd): 5993.250, Maximum intensity(cd): 5993.250

Angle of maximum intensity: C=0.0 γ =0.0

Beam Angle(50%Imax): [C0/180]Total=42.0

[C90/270]Total=42.0

Field angle(10%Imax): [C0/180]Total=77.8

[C90/270]Total=77.8

Maximum s/h(1/2): C0_180=0.66 C90_270=0.66

Maximum s/h(1/4): C0_180=0.71 C90_270=0.71

Up flux rate of lamp(%): 0.00%


Down flux rate of lamp(%): 97.67%


Up flux rate of LUM(%): - -


Down flux rate of LUM(%): 100.00%

CIE Type : Direct lighting

Output flux ratio in π solid angle : 99.302%

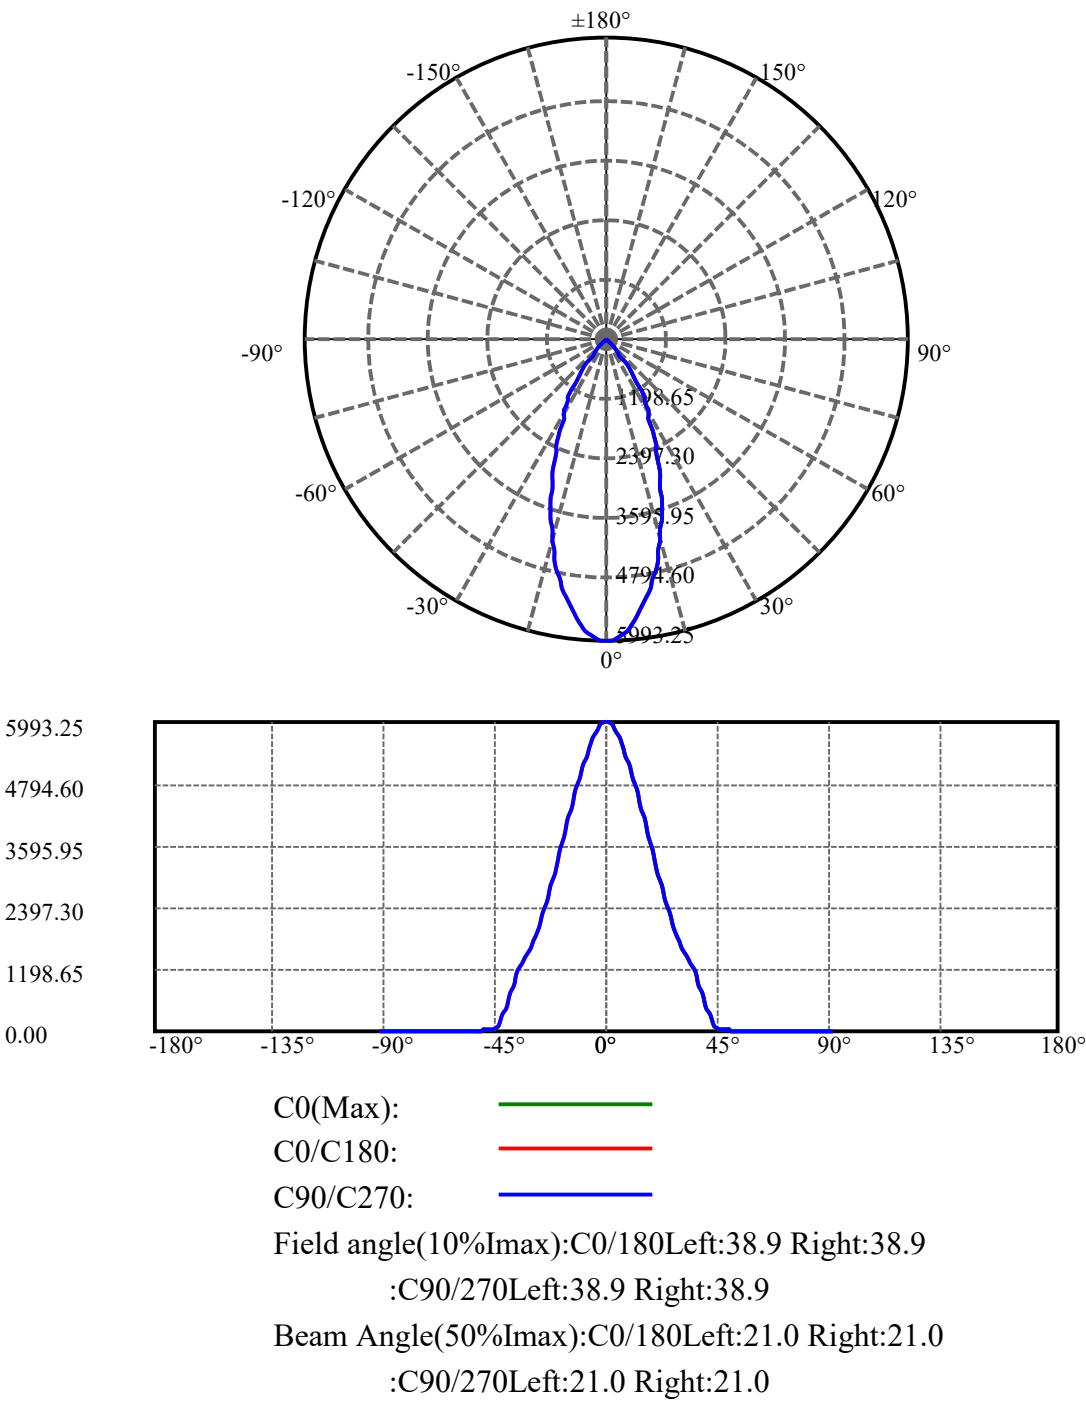

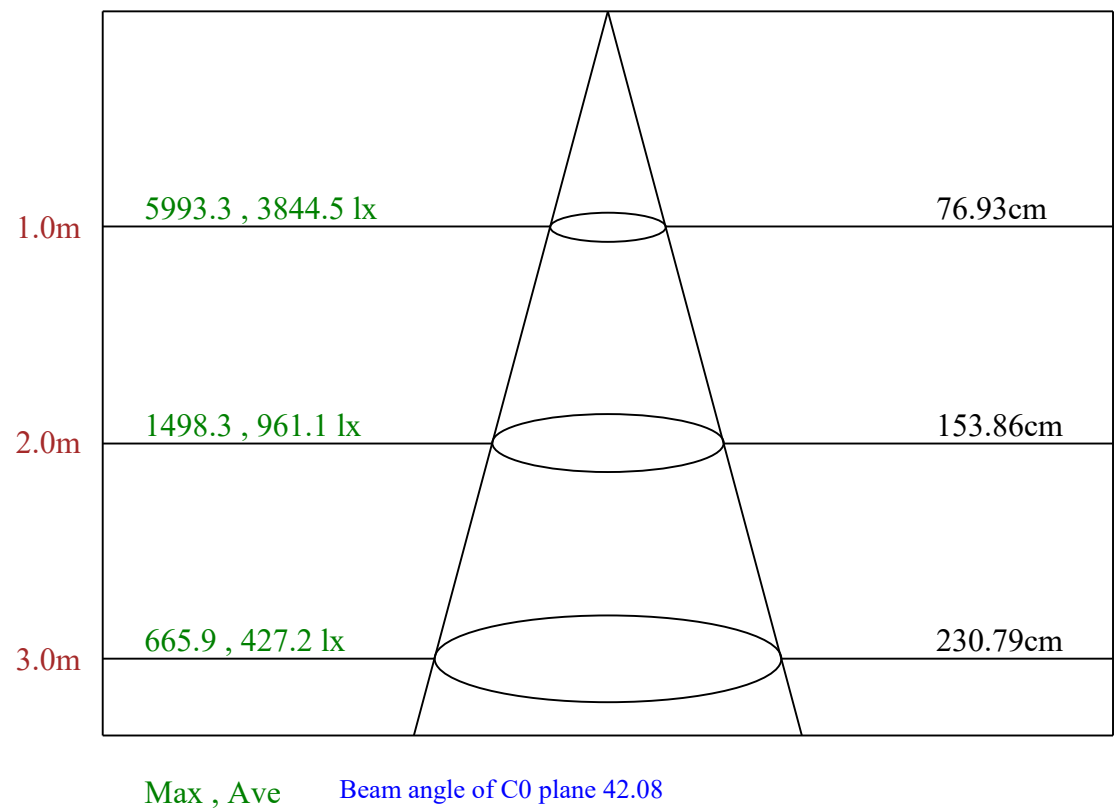

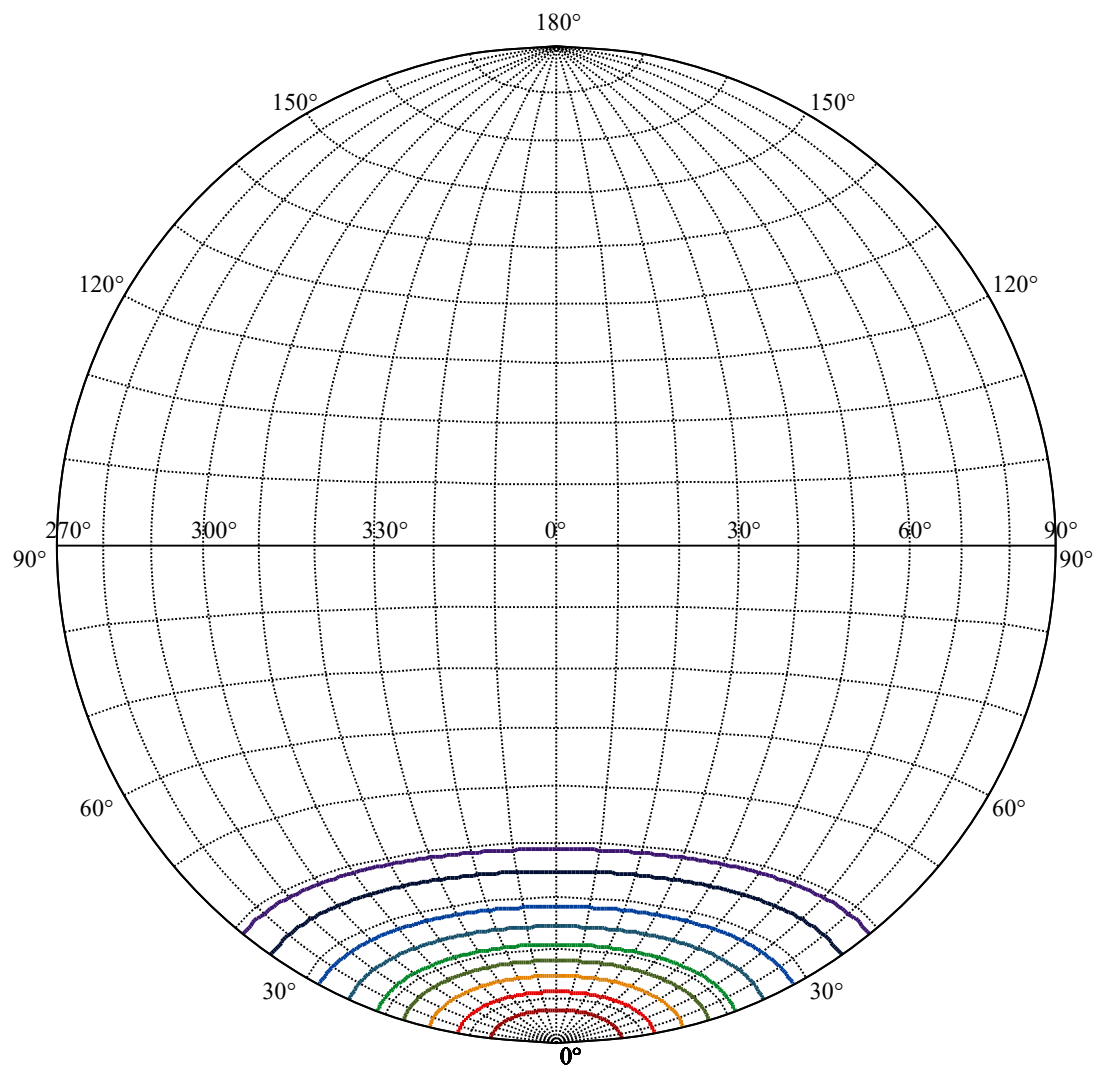


House


[Unit:cd]

Road

Imax:5993.25	
(10%Imax) 599.325	
(20%Imax) 1198.65	
(30%Imax) 1797.98	
(40%Imax) 2397.3	
(50%Imax) 2996.63	
(60%Imax) 3595.95	
(70%Imax) 4195.28	
(80%Imax) 4794.6	
(90%Imax) 5393.93	

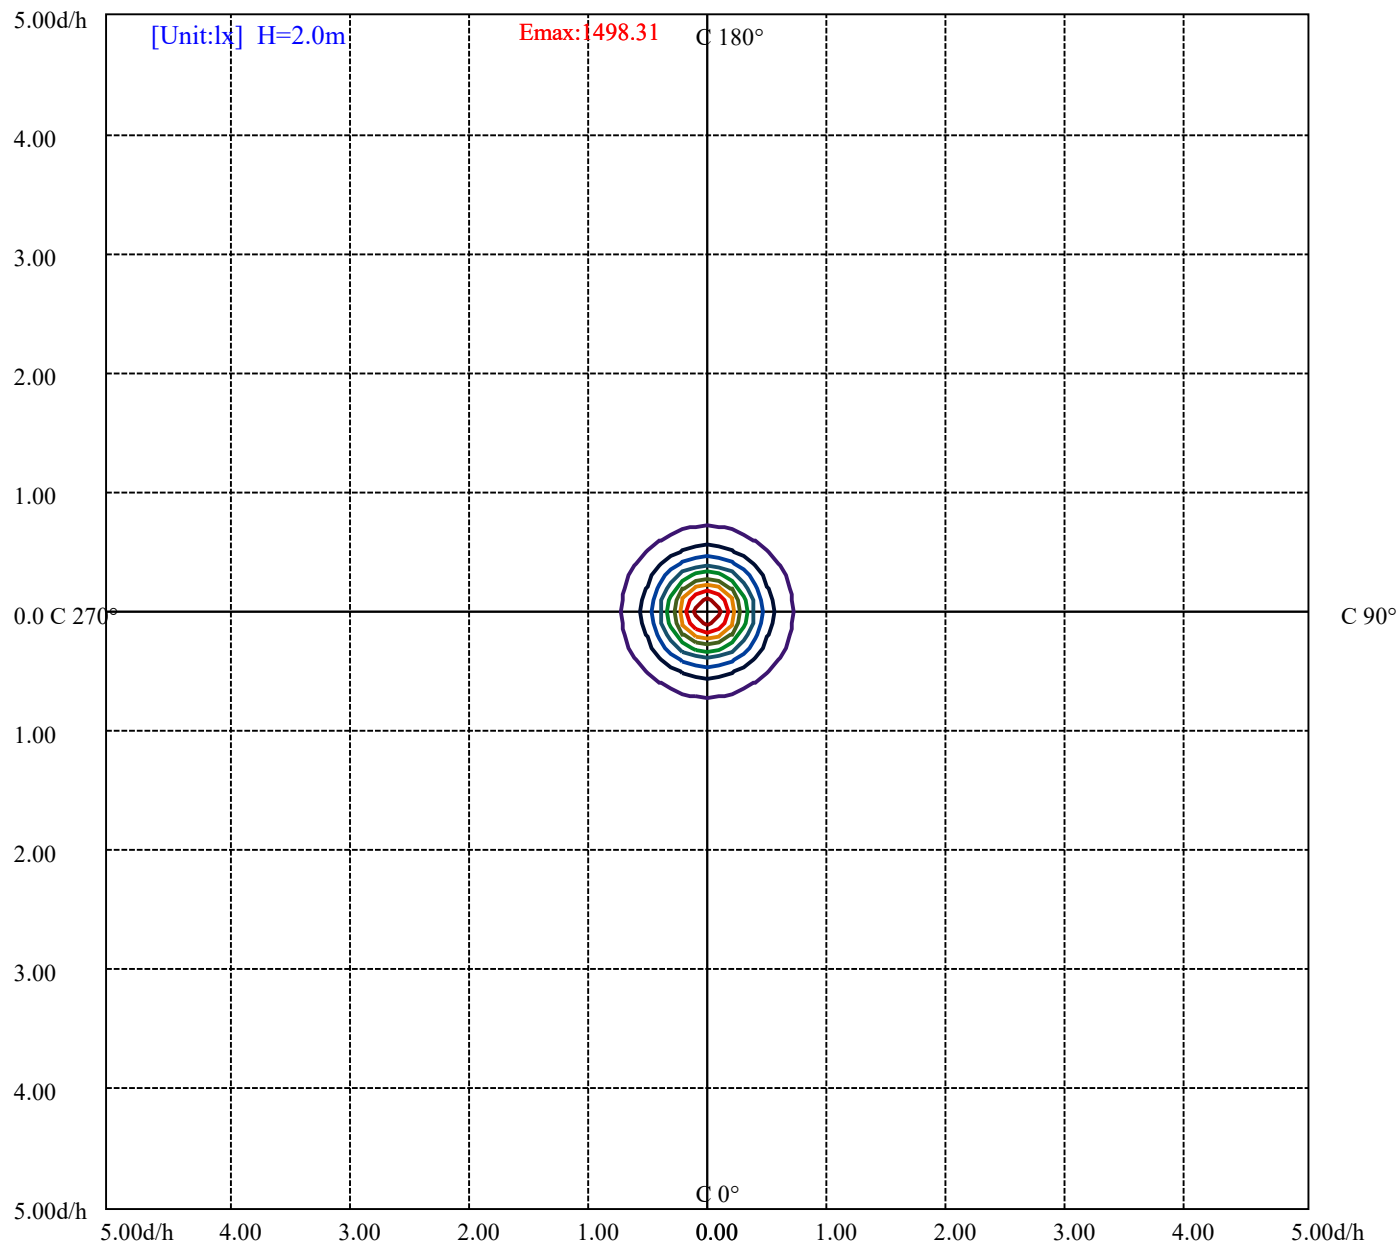

(10%Emax)	149.8313	———
(20%Emax)	299.6625	———
(30%Emax)	449.4925	———
(40%Emax)	599.325	———
(50%Emax)	749.155	———
(60%Emax)	898.9875	———
(70%Emax)	1048.818	———
(80%Emax)	1198.65	———
(90%Emax)	1348.48	———

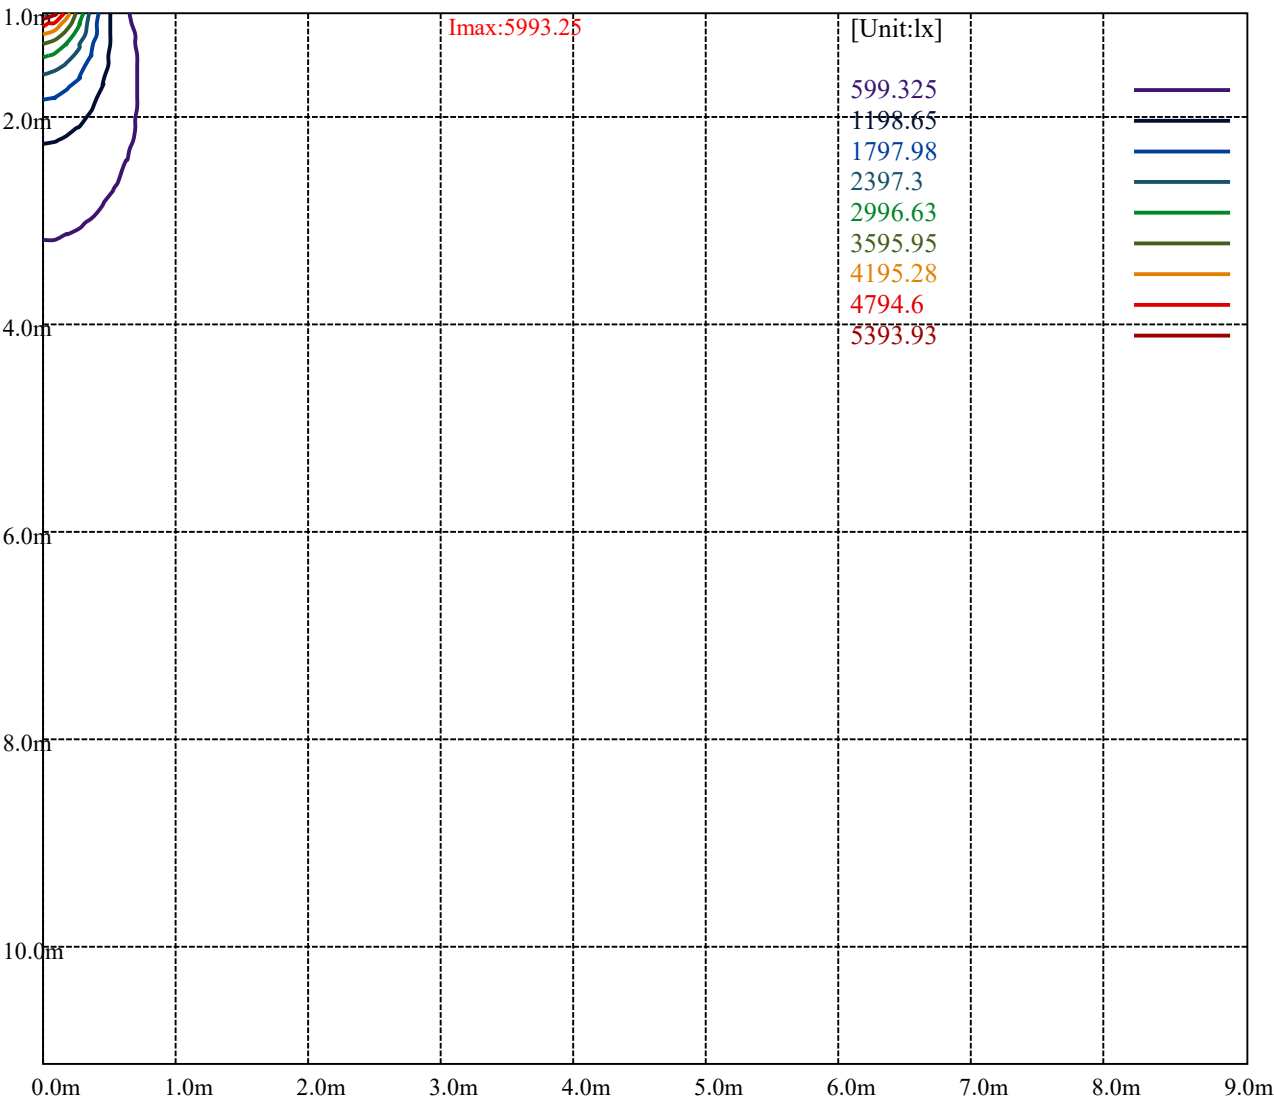

Luminance Table


γ	45	50	55	60	65	70	75	80	85
C0	4662	2023	1522	1306	1198	1157	1146	1178	1252
C45	4068	1740	1288	1088	980	927	897	898	923
C90	4662	2023	1522	1306	1198	1157	1146	1178	1252

L(Hor)(65)	L(Ver)(65)	L45(65)	L(Hor)(75)	L(Ver)(75)	L45(75)	L(Hor)(85)	L(Ver)(85)	L45(85)
2595	2595	2595	3471	3471	3471	9028	9028	9028

Glare Table


Glare	Quality	Service Values Illuminance(lx)							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
		a	b	c	d	e	f	g	h

Luminance Limiting Curve

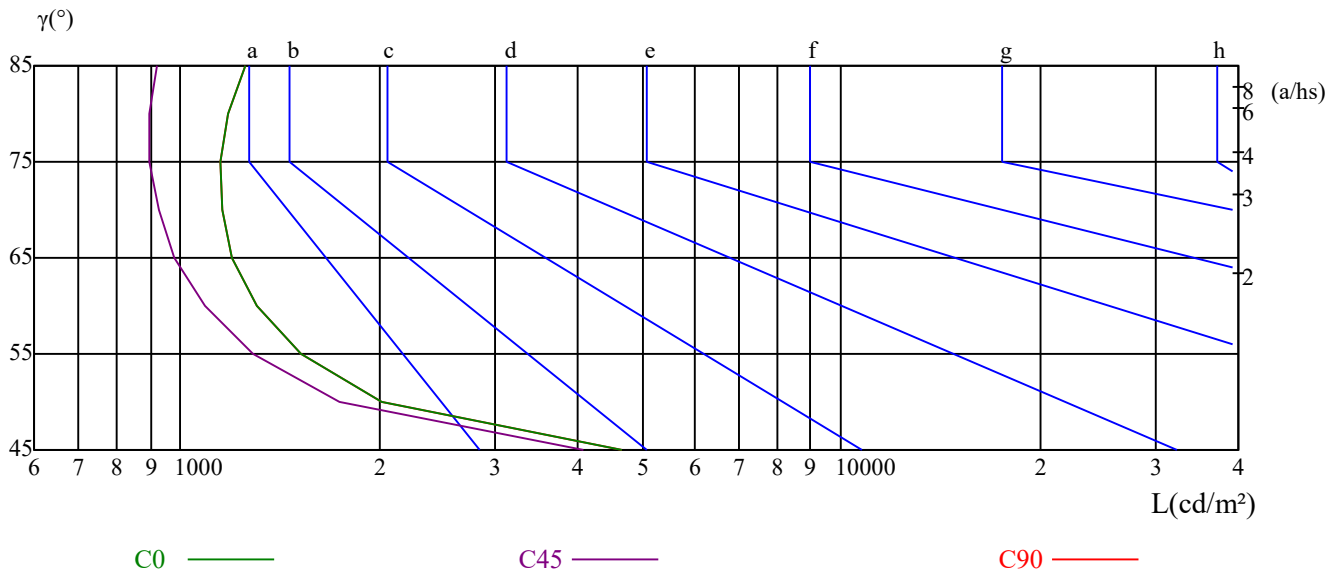


Illumination assessment according UGR											
Rf of Ceiling	70	70	50	50	30	70	70	50	50	30	
Rf of Wall	50	30	50	30	30	50	30	50	30	30	
Rf of Floor	20	20	20	20	20	20	20	20	20	20	
Room dimensions		Viewed crosswise					Viewed endwise				
X	Y										
2H	2H	18.97	19.89	19.33	20.20	20.52	19.03	19.95	19.39	20.26	20.58
	3H	18.76	19.58	19.15	19.92	20.27	18.82	19.64	19.21	19.98	20.33
	4H	18.67	19.42	19.07	19.78	20.15	18.72	19.48	19.13	19.84	20.20
	6H	18.59	19.28	19.00	19.65	20.05	18.64	19.33	19.06	19.71	20.11
	8H	18.52	19.18	18.94	19.56	19.97	18.58	19.23	19.00	19.62	20.03
	12H	18.46	19.08	18.88	19.48	19.89	18.51	19.14	18.94	19.53	19.95
4H	2H	18.65	19.40	19.05	19.76	20.13	18.71	19.46	19.11	19.82	20.19
	3H	18.41	19.04	18.83	19.44	19.85	18.46	19.10	18.89	19.50	19.91
	4H	18.34	18.88	18.78	19.31	19.76	18.40	18.94	18.84	19.37	19.82
	6H	18.22	18.70	18.69	19.15	19.61	18.27	18.75	18.75	19.21	19.66
	8H	18.17	18.62	18.66	19.08	19.55	18.23	18.67	18.72	19.13	19.61
	12H	18.14	18.55	18.63	19.00	19.53	18.20	18.61	18.69	19.06	19.58
8H	4H	18.14	18.58	18.62	19.04	19.52	18.19	18.64	18.68	19.10	19.57
	6H	18.01	18.37	18.52	18.85	19.37	18.07	18.43	18.58	18.91	19.42
	8H	18.02	18.32	18.56	18.85	19.35	18.08	18.38	18.61	18.90	19.40
	12H	18.00	18.23	18.55	18.75	19.27	18.06	18.29	18.60	18.80	19.33
12H	4H	18.08	18.49	18.57	18.95	19.47	18.14	18.55	18.63	19.01	19.53
	6H	18.00	18.30	18.53	18.82	19.32	18.05	18.36	18.59	18.88	19.38
	8H	17.97	18.20	18.52	18.72	19.25	18.03	18.26	18.58	18.78	19.30
Variation with the observer position at spacings:											
S = 1.0H		5.2/-14.0					5.2/-14.0				
S = 1.5H		8.0/-12.5					8.0/-12.5				
S = 2.0H		10.0/-11.5					10.0/-11.5				
Standard tables:		BK0					BK0				
Uncorrected UGR		-0.6					-0.6				

UGR calculation is based on CIE Publ. 117 ,S/H = 0.25

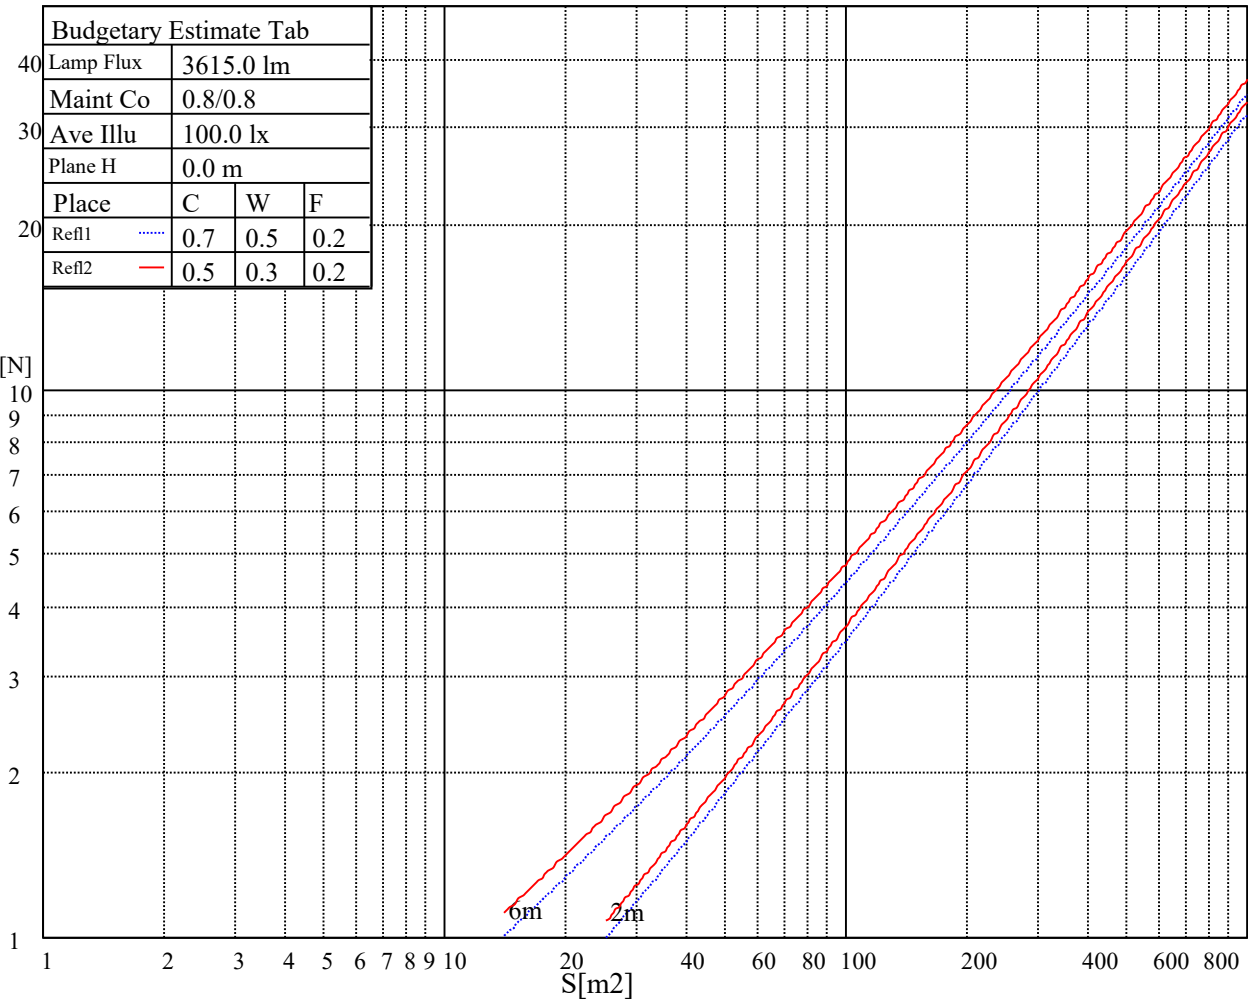

RHOCC	80			70			50			30			10			0
RHOW	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	COEFFCIENTS OF UTILIZATION RHOFC=20 CU															
0	1.16	1.16	1.16	1.14	1.14	1.14	1.09	1.09	1.09	1.04	1.04	1.04	1.00	1.00	1.00	0.98
1	1.09	1.06	1.04	1.06	1.04	1.03	1.03	1.01	0.99	0.99	0.98	0.96	0.96	0.95	0.94	0.92
2	1.02	0.98	0.95	1.00	0.97	0.94	0.97	0.94	0.92	0.94	0.92	0.90	0.91	0.89	0.88	0.86
3	0.95	0.91	0.87	0.94	0.90	0.87	0.92	0.88	0.85	0.89	0.86	0.84	0.87	0.85	0.83	0.81
4	0.90	0.85	0.81	0.89	0.84	0.80	0.87	0.83	0.80	0.85	0.81	0.79	0.83	0.80	0.78	0.76
5	0.85	0.79	0.75	0.84	0.79	0.75	0.82	0.78	0.74	0.80	0.77	0.74	0.79	0.76	0.73	0.72
6	0.80	0.75	0.71	0.79	0.74	0.71	0.78	0.73	0.70	0.77	0.73	0.70	0.75	0.72	0.69	0.68
7	0.76	0.70	0.67	0.75	0.70	0.66	0.74	0.69	0.66	0.73	0.69	0.66	0.72	0.68	0.65	0.64
8	0.72	0.66	0.63	0.71	0.66	0.63	0.70	0.66	0.62	0.69	0.65	0.62	0.68	0.65	0.62	0.61
9	0.68	0.63	0.59	0.68	0.63	0.59	0.67	0.62	0.59	0.66	0.62	0.59	0.65	0.62	0.59	0.57
10	0.65	0.60	0.56	0.65	0.60	0.56	0.64	0.59	0.56	0.63	0.59	0.56	0.62	0.59	0.56	0.55

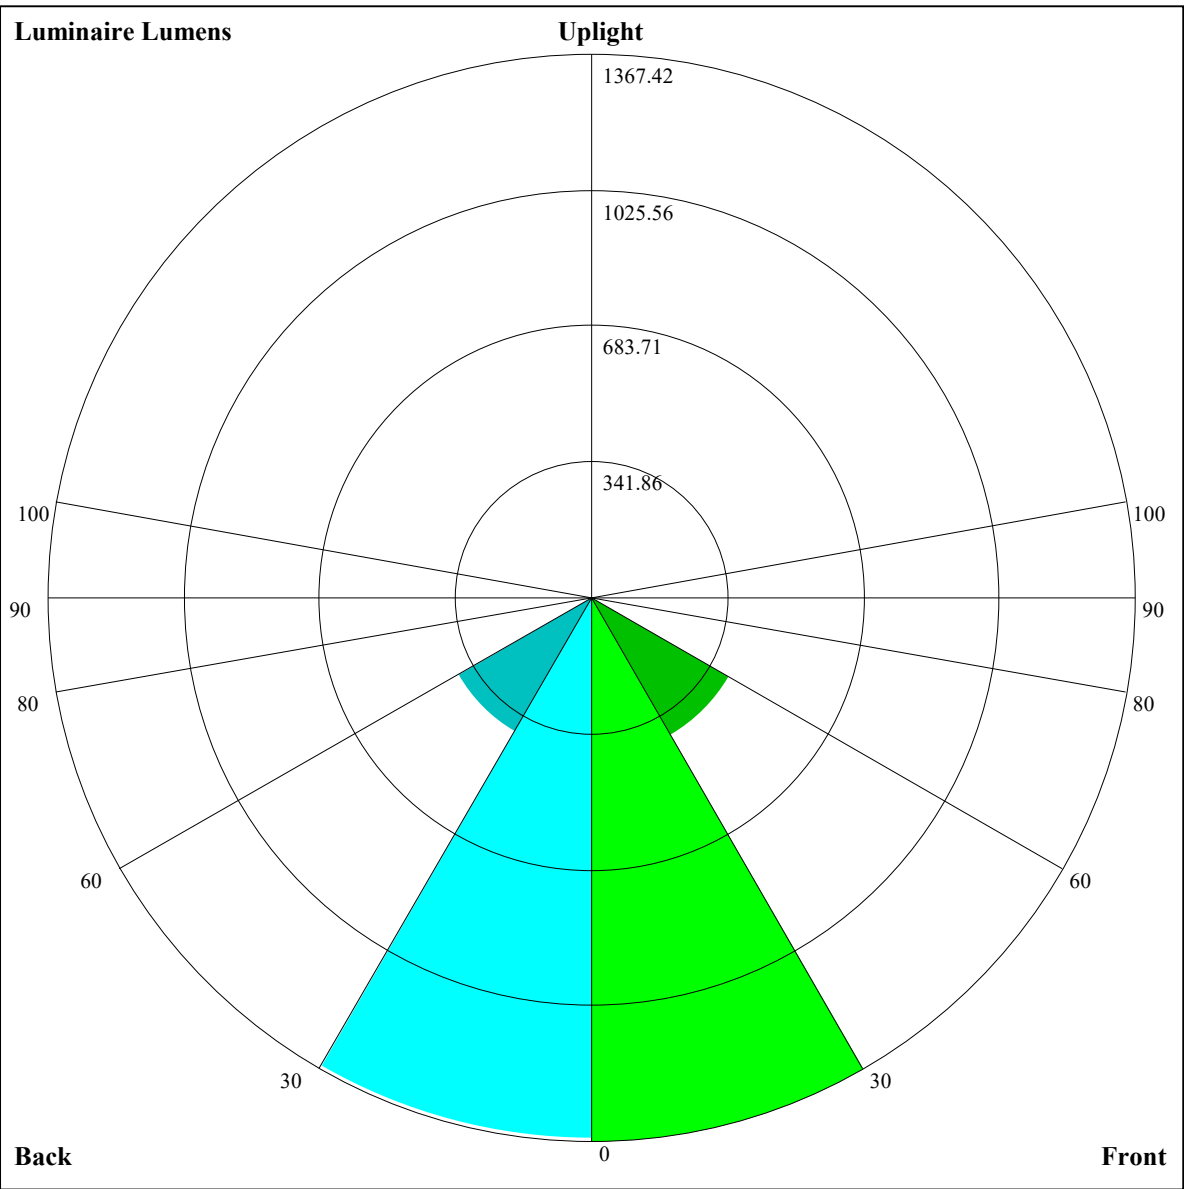

Luminaire Lumens:

FL=1367.42,FM=396.92,FH=8.72,FVH=3.64

BL=1362.55,BM=387.94,BH=8.64,BVH=3.63

UL=0,UH=0

BUG Rating:B3-U0-G0

NT Nata 3-2998-LM

Intensity data(cd)									Appendix Page: 12 Total:14	
C/ γ (°)	0.0	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	
0.0	5994.30	5980.88	5933.89	5875.99	5798.80	5680.49	5572.25	5454.79	5327.25	
45.0	5990.94	5998.50	5987.59	5946.47	5891.94	5822.29	5735.87	5610.01	5498.42	
90.0	5998.50	5981.71	5931.37	5871.80	5793.77	5700.63	5565.54	5445.56	5314.66	
135.0	5989.27	5999.33	5981.71	5942.28	5862.57	5778.66	5677.14	5563.86	5407.80	
180.0	5994.30	5986.75	5945.63	5890.26	5797.12	5705.66	5599.94	5480.80	5321.38	
225.0	5990.94	5952.35	5902.84	5835.72	5732.51	5633.51	5491.71	5365.85	5232.44	
270.0	5998.50	5995.14	5971.65	5911.23	5844.11	5761.88	5636.86	5522.75	5397.73	
315.0	5989.27	5954.86	5883.54	5803.00	5709.02	5599.94	5446.40	5313.83	5173.70	
360.0	5994.30	5980.88	5933.89	5875.99	5798.80	5680.49	5572.25	5454.79	5327.25	
C/ γ (°)	9.0	10.0	11.0	12.0	13.0	14.0	15.0	16.0	17.0	
0.0	5156.08	5010.93	4856.54	4697.12	4486.52	4312.83	4138.31	3912.60	3732.20	
45.0	5375.92	5244.18	5067.98	4916.95	4756.69	4546.93	4370.73	4146.70	3964.62	
90.0	5140.98	4992.47	4795.29	4632.51	4463.02	4289.34	4071.18	3891.63	3713.75	
135.0	5273.55	5133.43	4944.64	4786.06	4621.60	4450.44	4230.60	4050.21	3866.45	
180.0	5185.45	5040.29	4884.23	4679.50	4508.33	4330.45	4149.22	3920.99	3737.24	
225.0	5090.64	4900.17	4740.75	4575.46	4403.45	4183.62	4005.74	3824.50	3639.07	
270.0	5231.60	5086.44	4932.89	4733.20	4566.23	4396.74	4224.73	4007.42	3832.89	
315.0	5027.71	4836.40	4678.66	4515.88	4306.96	4137.47	3966.30	3748.15	3570.27	
360.0	5156.08	5010.93	4856.54	4697.12	4486.52	4312.83	4138.31	3912.60	3732.20	
C/ γ (°)	18.0	19.0	20.0	21.0	22.0	23.0	24.0	25.0	26.0	
0.0	3509.02	3332.81	3159.97	2990.48	2783.23	2622.13	2466.91	2315.04	2135.48	
45.0	3781.71	3599.63	3379.80	3206.96	3039.98	2878.05	2684.22	2534.87	2388.04	
90.0	3538.38	3321.91	3153.26	2988.80	2785.75	2628.85	2477.82	2297.42	2160.65	
135.0	3638.23	3459.51	3284.99	3067.67	2899.02	2731.21	2531.52	2374.61	2221.07	
180.0	3503.14	3321.91	3146.54	2933.42	2764.77	2602.84	2446.77	2259.66	2117.02	
225.0	3410.01	3232.97	3022.36	2858.75	2702.68	2516.41	2372.10	2233.65	2101.92	
270.0	3651.66	3477.13	3264.85	3097.04	2933.42	2735.41	2583.54	2400.62	2259.66	
315.0	3393.23	3175.07	3004.74	2836.93	2671.64	2471.94	2315.04	2164.01	2018.85	
360.0	3509.02	3332.81	3159.97	2990.48	2783.23	2622.13	2466.91	2315.04	2135.48	
C/ γ (°)	27.0	28.0	29.0	30.0	31.0	32.0	33.0	34.0	35.0	
0.0	1997.04	1664.35	1664.35	1613.50	1520.20	1431.77	1338.13	1273.02	1159.58	
45.0	2247.91	2081.78	1960.12	1819.16	1718.47	1626.17	1517.94	1441.58	1371.94	
90.0	2029.76	1806.57	1663.26	1663.26	1546.88	1465.08	1391.49	1318.32	1188.36	
135.0	2075.07	1904.74	1780.56	1669.81	1571.64	1460.88	1385.37	1319.08	1240.21	
180.0	1982.77	1852.72	1711.76	1608.55	1507.03	1402.15	1332.50	1246.08	1140.36	
225.0	1947.53	1669.30	1669.30	1621.14	1507.45	1428.07	1354.07	1260.93	1098.83	
270.0	2123.73	1959.28	1846.01	1735.25	1629.53	1511.22	1431.51	1360.19	1277.97	
315.0	1663.60	1663.60	1608.22	1485.05	1397.03	1323.11	1245.24	1169.98	1030.61	
360.0	1997.04	1664.35	1664.35	1613.50	1520.20	1431.77	1338.13	1273.02	1159.58	
C/ γ (°)	36.0	37.0	38.0	39.0	40.0	41.0	42.0	43.0	44.0	
0.0	1031.45	893.26	706.99	557.13	415.16	285.53	173.68	79.21	52.52	
45.0	1281.32	1111.83	954.93	795.51	632.73	445.62	445.62	277.31	91.71	
90.0	1054.78	902.49	738.45	530.79	381.60	249.20	126.95	73.25	51.77	
135.0	1145.40	977.58	831.59	678.88	522.82	449.82	449.82	114.87	60.33	
180.0	1006.11	836.62	689.79	544.63	440.59	440.59	130.64	67.21	47.32	
225.0	955.35	766.90	612.09	462.91	285.78	169.91	94.81	65.03	50.18	
270.0	1163.85	991.85	838.30	629.38	467.44	428.84	259.86	93.30	61.17	
315.0	900.06	756.49	604.88	454.52	283.94	168.23	86.76	51.69	39.10	
360.0	1031.45	893.26	706.99	557.13	415.16	285.53	173.68	79.21	52.52	

Intensity data(cd)

C/ γ (°)	45.0	46.0	47.0	48.0	49.0	50.0	51.0	52.0	53.0
0.0	42.96	32.97	23.83	20.31	18.29	17.03	15.69	14.85	14.10
45.0	66.29	53.70	39.52	31.30	26.93	23.33	21.06	19.30	17.37
90.0	40.78	31.72	25.84	22.49	20.31	18.63	17.20	15.69	14.85
135.0	40.61	31.97	24.75	20.14	18.12	16.87	15.61	14.85	14.10
180.0	37.76	26.85	21.23	19.13	17.28	16.19	15.02	14.26	13.59
225.0	39.10	30.79	26.09	22.65	20.47	18.71	16.95	15.69	14.68
270.0	46.74	36.42	28.36	23.75	20.81	19.05	17.45	16.28	15.02
315.0	30.29	23.33	18.79	17.45	16.11	15.27	14.52	13.76	13.17
360.0	42.96	32.97	23.83	20.31	18.29	17.03	15.69	14.85	14.10
C/ γ (°)	54.0	55.0	56.0	57.0	58.0	59.0	60.0	61.0	62.0
0.0	13.42	12.75	12.25	11.83	11.41	10.99	10.74	10.32	10.15
45.0	16.11	15.02	14.18	13.26	12.59	12.08	11.50	10.99	10.66
90.0	14.01	13.26	12.50	12.00	11.41	10.99	10.66	10.24	9.98
135.0	13.34	12.84	12.33	11.83	11.41	11.08	10.82	10.40	10.15
180.0	12.92	12.33	11.91	11.50	11.08	10.74	10.49	10.15	9.82
225.0	13.68	13.09	12.25	11.75	11.33	10.91	10.40	10.15	9.90
270.0	14.18	13.42	12.67	12.17	11.66	11.16	10.82	10.49	10.07
315.0	12.75	12.25	11.75	11.41	11.08	10.82	10.40	10.15	9.90
360.0	13.42	12.75	12.25	11.83	11.41	10.99	10.74	10.32	10.15
C/ γ (°)	63.0	64.0	65.0	66.0	67.0	68.0	69.0	70.0	71.0
0.0	9.82	9.57	9.31	9.15	8.89	8.73	8.56	8.39	8.22
45.0	10.24	9.90	9.65	9.40	9.06	8.89	8.73	8.47	8.31
90.0	9.73	9.48	9.15	8.98	8.73	8.64	8.39	8.22	8.14
135.0	9.90	9.65	9.40	9.23	8.98	8.81	8.64	8.47	8.31
180.0	9.57	9.40	9.15	8.98	8.73	8.56	8.39	8.31	8.14
225.0	9.65	9.40	9.06	8.89	8.73	8.47	8.31	8.14	7.97
270.0	9.82	9.57	9.31	9.06	8.89	8.73	8.56	8.39	8.22
315.0	9.65	9.40	9.23	8.98	8.81	8.64	8.47	8.39	8.22
360.0	9.82	9.57	9.31	9.15	8.89	8.73	8.56	8.39	8.22
C/ γ (°)	72.0	73.0	74.0	75.0	76.0	77.0	78.0	79.0	80.0
0.0	8.05	7.97	7.80	7.64	7.55	7.38	7.30	7.22	7.05
45.0	8.22	7.97	7.80	7.72	7.55	7.47	7.30	7.22	7.13
90.0	7.89	7.80	7.64	7.47	7.38	7.22	7.13	7.05	6.96
135.0	8.14	8.05	7.89	7.72	7.64	7.55	7.38	7.30	7.22
180.0	7.97	7.89	7.72	7.55	7.47	7.30	7.22	7.13	7.05
225.0	7.80	7.64	7.64	7.38	7.38	7.22	7.13	7.05	6.96
270.0	8.05	7.89	7.80	7.64	7.55	7.38	7.30	7.22	7.05
315.0	8.05	7.89	7.80	7.72	7.55	7.47	7.30	7.22	7.13
360.0	8.05	7.97	7.80	7.64	7.55	7.38	7.30	7.22	7.05
C/ γ (°)	81.0	82.0	83.0	84.0	85.0	86.0	87.0	88.0	89.0
0.0	6.96	6.88	6.80	6.71	6.71	6.63	6.63	6.46	6.29
45.0	6.96	6.88	6.88	6.71	6.63	6.54	6.54	6.46	6.38
90.0	6.88	6.80	6.80	6.71	6.63	6.54	6.54	6.38	6.29
135.0	7.13	7.05	7.05	6.88	6.80	6.63	6.63	6.63	6.38
180.0	6.96	6.88	6.80	6.71	6.63	6.63	6.54	6.38	6.38
225.0	6.88	6.80	6.71	6.63	6.54	6.54	6.46	6.29	6.29
270.0	7.05	6.96	6.80	6.71	6.63	6.54	6.54	6.38	6.29
315.0	7.05	6.96	6.80	6.71	6.71	6.63	6.54	6.38	6.38
360.0	6.96	6.88	6.80	6.71	6.71	6.63	6.63	6.46	6.29

Intensity data(cd)

C/ $\gamma(^{\circ})$	90.0
0.0	6.29
45.0	6.29
90.0	6.29
135.0	6.38
180.0	6.29
225.0	6.21
270.0	6.29
315.0	6.38
360.0	6.29