



table for unmentioned tolerance in the drawing (unit: mm)				punch angle tolerance in the drawing (unit:degree)		
>0-5	>5-30	>30-90	>90-150	0-10	10-50	50-120
±0.15	±0.2	±0.4	±0.5	±1°	±0.5°	±0.3°
>150-250	>250-400	>400-700		120-250	250-360	360 above
±0.8	±1.5	±2		±0.2°	±0.166°	±0.085°

“*” Marked for key control dimensions

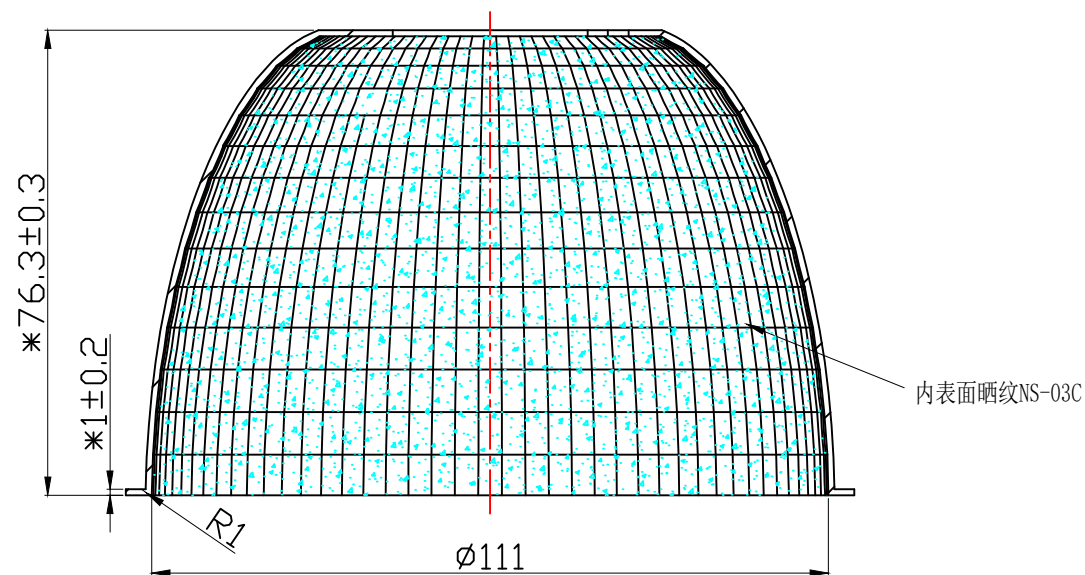

A-A

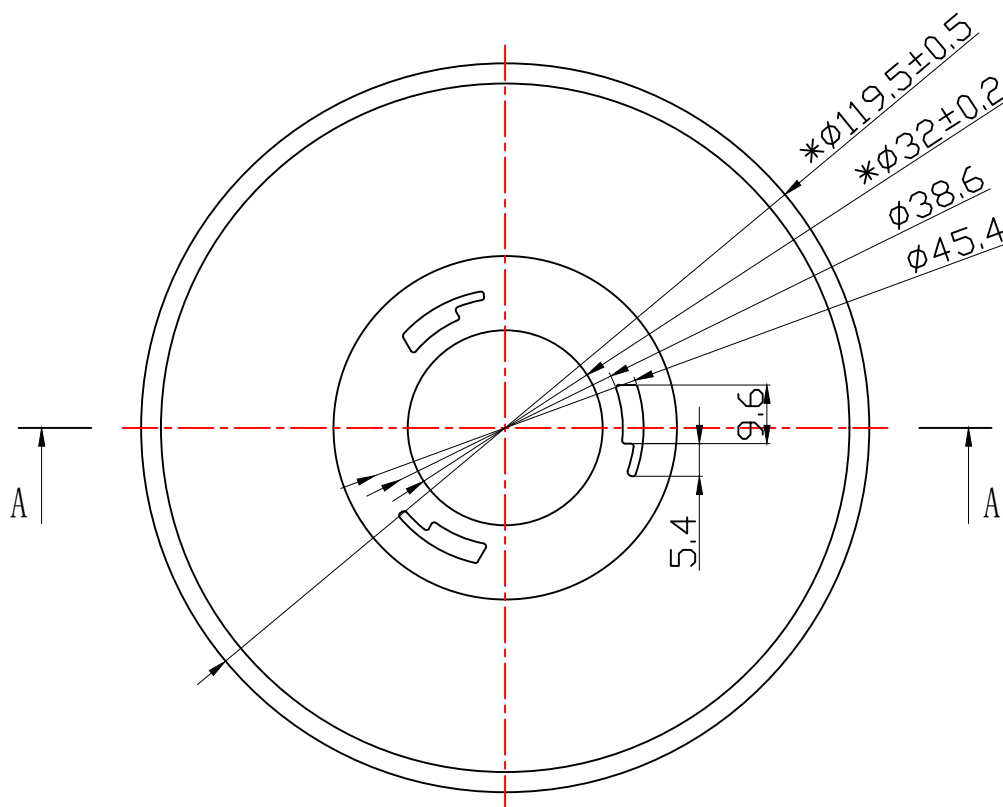

Light Source	CITIZEN CLU038
PlasticHolder	92.70.131.00
Metal Adaptor	
Design Angle	60° ±5°
Measured Angle	61.3°
Efficiency	91.83%
光学装配示意图	

										MATERIAL: T=1.0MM 1090AL FINISH: ANDOIZING					P/N: 91.04.2644.000		版本/REV KO	
															产品名称 PRODUCT NAME		4-2644-A	
															客户代号 CUSTOMER ID		NT	
															客户编号 CUSTOMER CODE		AR-D120 65°	
																		
															</			