


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.32V I:0.1996A P:39.938W PF:0.8688 Freq:50.18Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5753.8x1 lm		
LumCAT: 5-2705-LM2	Test NO: 20260813-C014	Report NO: 20260813-B014
LED HOLDER: 92.70.549.00	DIM.: ϕ 111 H70	Lamp No.: 1
LampCAT: CITIZEN CLU048	MFR.: NATA	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 140.24 lm/W			
MODEL		Imax (cd)	24056	S/MH(C0/180)	0.38
NOMINAL POWER(W)	35	LOR(%)	97.3	S/MH(C90/270)	0.41
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	5601.0	η UP,DN(C0-180)	0.0,47.9
NOMINAL FLUX(lm)	5753.8	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.4
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	34.9	η down (%)	97.3	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

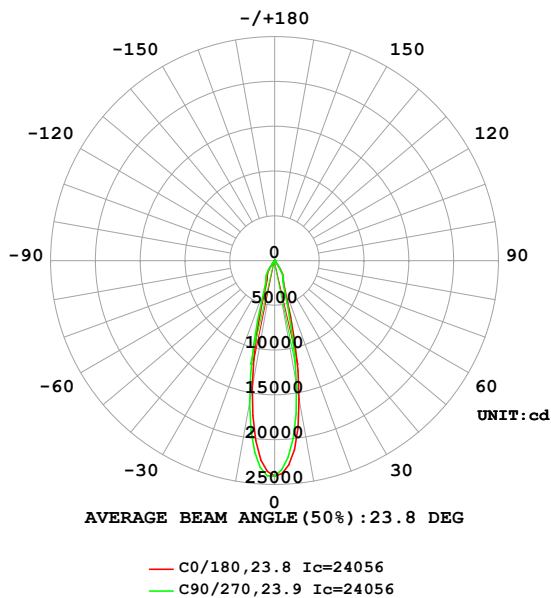

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

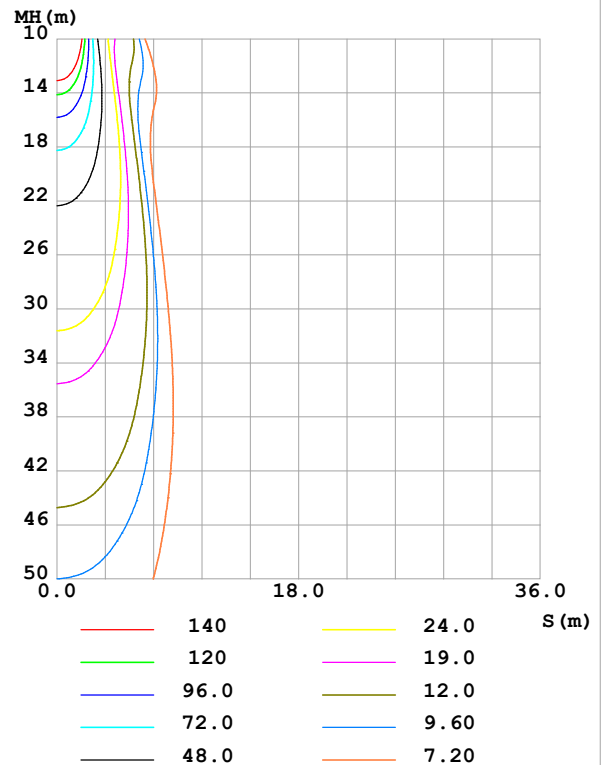

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.0°C
Operators: ZJW
Test Date: 2026-08-13

γ Range: 0 - 90DEG
 γ Interval: 2.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity: 60.0%
Test Distance: 7.710m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1576	1462	1411	1462	1441	1550	1616	1575	0- 10	1870	1870	33.4,32.5
20	327.2	304.2	292.7	297.0	272.4	310.6	340.2	324.5	10- 20	2084	3954	70.6,68.7
30	179.2	177.9	172.7	175.5	162.5	182.4	188.5	186.5	20- 30	1054	5008	89.4,87
40	14.13	7.366	6.499	7.286	7.606	10.08	14.52	12.64	30- 40	534.3	5542	99,96.3
50	2.188	1.603	1.477	1.641	1.707	1.740	1.395	1.624	40- 50	26.82	5569	99.4,96.8
60	0.7323	0.6324	0.5677	0.6056	0.6787	0.6714	0.5895	0.6224	50- 60	8.950	5578	99.6,96.9
70	1.090	1.430	1.027	0.5038	0.4596	0.4066	0.6012	0.7815	60- 70	6.518	5585	99.7,97.1
80	1.487	1.788	0.9281	0.4634	0.4409	0.3161	0.4953	0.7729	70- 80	8.921	5594	99.9,97.2
90	0.9478	0.9995	0.4363	0.1196	0.1284	0.0728	0.1690	0.5338	80- 90	7.302	5601	100,97.3
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:X10cd									UNIT:lm		

Conical surface Flux(90deg): 5562.6 lm

%lum = 99.3%

%lamp = 96.7%

Conical surface Flux(130deg): 5581.9 lm

%lum = 99.7%


%lamp = 97.0%

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-08-13

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.32V I:0.1996A P:39.938W PF:0.8688 Freq:50.18Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0Lamp Flux:5753.8x1 lm		
LumCAT: 5-2705-LM2	Test NO: 20260813-C014	Report NO: 20260813-B014
LED HOLDER: 92.70.549.00	DIM.: ϕ111 H70	Lamp No.: 1
LampCAT: CITIZEN CLU048	MFR.: NATA	

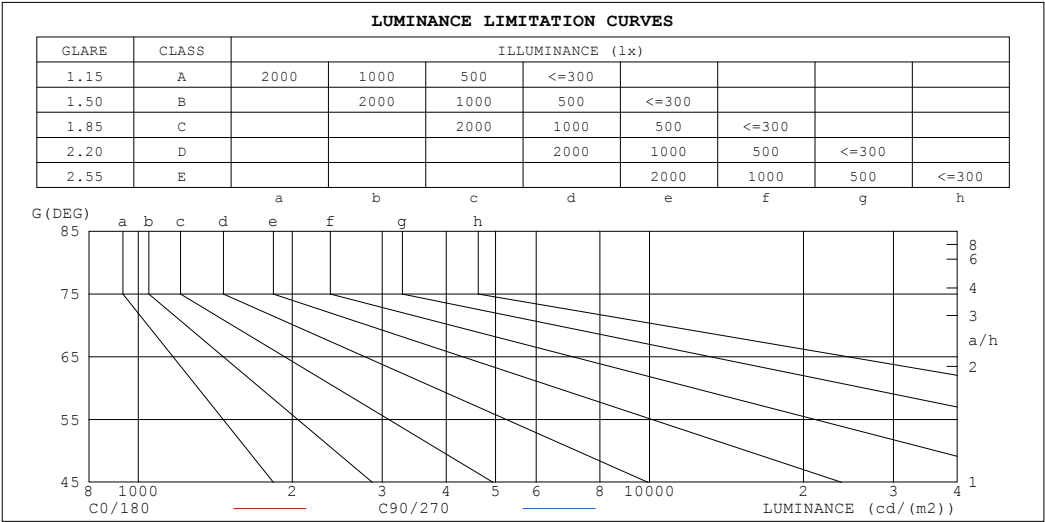

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	32	27
80	22	14
75	13	10
70	8	8
65	4	4
60	4	3
55	6	4
50	9	6
45	17	10


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-08-13

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
γ Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.32V I:0.1996A P:39.938W PF:0.8688 Freq:50.18Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:5753.8x1 lm		
LumCAT: 5-2705-LM2			Test NO: 20260813-C014			Report NO: 20260813-B014		
LED HOLDER: 92.70.549.00			DIM.: ϕ 111 H70			Lamp No.: 1		
LampCAT: CITIZEN CLU048			MFR.: NATA					

pcc	80%			70%			50%			30%			10%			0
p _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
p _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.16	1.16	1.16	1.13	1.13	1.13	1.08	1.08	1.08	1.04	1.04	1.04	.99	.99	.99	.97
1.0	1.09	1.08	1.06	1.07	1.06	1.04	1.04	1.02	1.01	.00	.99	.98	.97	.96	.95	.93
2.0	1.04	1.01	.98	1.02	.00	.97	.99	.97	.95	.97	.95	.93	.94	.92	.91	.90
3.0	.99	.95	.92	.98	.94	.92	.95	.93	.90	.93	.91	.89	.91	.89	.88	.86
4.0	.95	.91	.88	.94	.90	.87	.92	.89	.86	.90	.87	.85	.88	.86	.84	.83
5.0	.91	.87	.84	.90	.86	.83	.89	.85	.83	.87	.84	.82	.86	.83	.81	.80
6.0	.88	.83	.80	.87	.83	.80	.86	.82	.79	.84	.81	.79	.83	.80	.78	.77
7.0	.84	.80	.77	.84	.80	.77	.83	.79	.76	.82	.78	.76	.81	.78	.76	.75
8.0	.81	.77	.74	.81	.77	.74	.80	.76	.74	.79	.76	.74	.78	.75	.73	.72
9.0	.79	.75	.72	.78	.74	.72	.78	.74	.71	.77	.74	.71	.76	.73	.71	.70
10.0	.76	.72	.69	.76	.72	.69	.75	.72	.69	.75	.71	.69	.74	.71	.69	.68

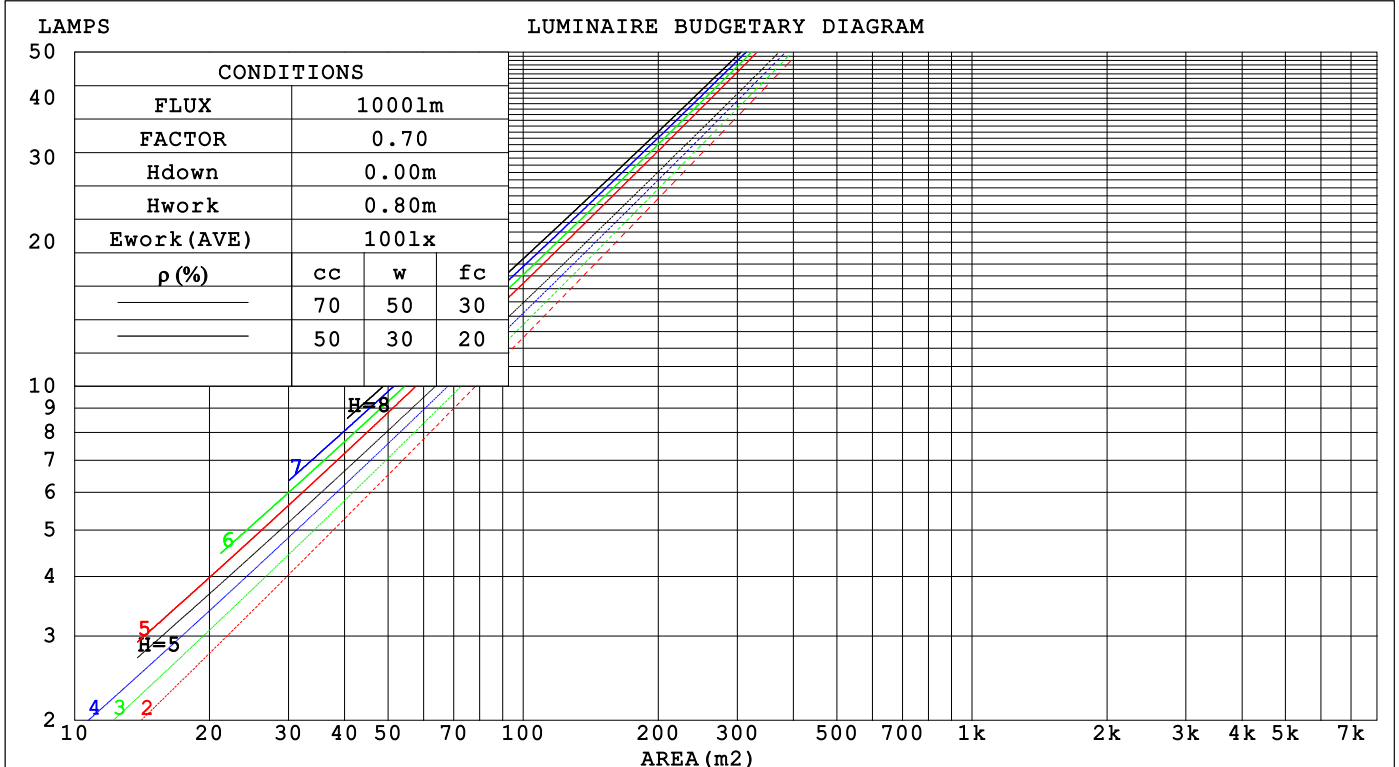

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-08-13

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:230.32V I:0.1996A P:39.938W PF:0.8688 Freq:50.18Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:5753.8x1 lm		
LumCAT: 5-2705-LM2			Test NO: 20260813-C014			Report NO: 20260813-B014		
LED HOLDER: 92.70.549.00			DIM.: ϕ 111 H70			Lamp No.: 1		
LampCAT: CITIZEN CLU048			MFR.: NATA					

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.141	.080	.025	.134	.077	.024	.122	.070	.022	.111	.064	.021	.101	.059	.019															
2.0	.131	.072	.022	.126	.069	.021	.116	.064	.020	.106	.060	.019	.098	.055	.017															
3.0	.122	.065	.020	.118	.063	.019	.110	.059	.018	.102	.056	.017	.095	.052	.016															
4.0	.115	.060	.018	.111	.058	.017	.104	.055	.017	.098	.052	.016	.092	.050	.015															
5.0	.109	.055	.016	.105	.054	.016	.099	.052	.015	.094	.049	.015	.088	.047	.014															
6.0	.103	.052	.015	.100	.051	.015	.095	.049	.014	.090	.047	.014	.086	.045	.013															
7.0	.098	.048	.014	.096	.048	.014	.091	.046	.013	.087	.044	.013	.083	.043	.013															
8.0	.094	.046	.013	.091	.045	.013	.087	.044	.012	.084	.042	.012	.080	.041	.012															
9.0	.089	.043	.012	.088	.043	.012	.084	.042	.012	.081	.040	.012	.077	.039	.011															
10.0	.086	.041	.011	.084	.041	.011	.081	.040	.011	.078	.039	.011	.075	.038	.011															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.185	.185	.185	.158	.158	.158	.108	.108	.108	.062	.062	.062	.020	.020	.020	
1.0	.164	.153	.144	.141	.132	.124	.096	.091	.085	.055	.052	.050	.018	.017	.016	
2.0	.147	.129	.114	.126	.111	.098	.086	.077	.069	.050	.045	.040	.016	.014	.013	
3.0	.133	.110	.092	.114	.095	.080	.078	.066	.056	.045	.039	.033	.015	.013	.011	
4.0	.121	.095	.076	.104	.082	.066	.072	.057	.046	.041	.034	.027	.013	.011	.009	
5.0	.111	.084	.063	.096	.072	.055	.066	.051	.039	.038	.030	.023	.012	.010	.008	
6.0	.103	.074	.053	.088	.064	.046	.061	.045	.033	.035	.026	.019	.011	.009	.006	
7.0	.096	.066	.045	.082	.057	.040	.057	.040	.028	.033	.024	.017	.011	.008	.006	
8.0	.090	.060	.039	.077	.052	.034	.053	.036	.024	.031	.021	.014	.010	.007	.005	
9.0	.084	.054	.034	.073	.047	.030	.050	.033	.021	.029	.020	.013	.009	.006	.004	
10.0	.079	.050	.030	.068	.043	.026	.048	.030	.018	.028	.018	.011	.009	.006	.004	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-08-13

γ Range: 0 - 90DEG
 γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.32V I:0.1996A P:39.938W PF:0.8688 Freq:50.18Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5753.8x1 lm										
LumCAT: 5-2705-LM2					Test NO: 20260813-C014			Report NO: 20260813-B014		
LED HOLDER: 92.70.549.00					DIM.: ϕ 111 H70			Lamp No.: 1		
LampCAT: CITIZEN CLU048					MFR.: NATA					
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	0.7	1.4	0.9	1.6	1.7	0.0	0.7	0.2	0.9	1.0
3H	0.6	1.3	0.9	1.5	1.6	-0.1	0.6	0.2	0.8	1.0
4H	0.6	1.3	0.9	1.5	1.7	-0.1	0.6	0.2	0.8	1.0
6H	0.8	1.4	1.1	1.6	1.8	-0.0	0.6	0.3	0.8	1.0
8H	0.9	1.4	1.2	1.7	1.9	0.1	0.6	0.3	0.9	1.1
12H	1.0	1.5	1.3	1.8	2.1	0.1	0.7	0.5	0.9	1.2
4H 2H	0.5	1.1	0.8	1.3	1.5	-0.2	0.4	0.1	0.6	0.9
3H	0.4	1.0	0.7	1.2	1.5	-0.2	0.3	0.1	0.6	0.8
4H	0.5	1.0	0.8	1.3	1.6	-0.2	0.3	0.2	0.6	0.9
6H	0.8	1.3	1.2	1.6	1.9	-0.0	0.4	0.4	0.8	1.1
8H	1.0	1.4	1.4	1.8	2.1	0.1	0.6	0.5	0.9	1.3
12H	1.2	1.6	1.6	2.0	2.4	0.3	0.7	0.7	1.1	1.5
8H 4H	0.5	0.9	0.9	1.3	1.6	-0.2	0.3	0.2	0.6	1.0
6H	1.0	1.4	1.5	1.8	2.2	0.2	0.6	0.7	1.0	1.4
8H	1.3	1.6	1.8	2.1	2.5	0.5	0.8	1.0	1.2	1.7
12H	1.7	2.0	2.2	2.4	2.9	0.9	1.1	1.3	1.6	2.0
12H 4H	0.5	0.9	0.9	1.3	1.6	-0.1	0.2	0.3	0.6	1.0
6H	1.1	1.4	1.6	1.8	2.3	0.4	0.7	0.8	1.1	1.5
8H	1.5	1.7	1.9	2.2	2.6	0.7	0.9	1.1	1.4	1.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.2 / - 1.3					+ 2.1 / - 0.7				
1.5H	+ 5.4 / - 1.2					+ 3.9 / - 0.7				
2.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.3				

CIE Pub.117, 5754 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 6.1$)
 Area: 3.868 m²

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.0℃
 Operators:ZJW
 Test Date:2026-08-13

γ Range: 0 - 90DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
 Humidity:60.0%
 Test Distance:7.710m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.32V I:0.1996A P:39.938W PF:0.8688 Freq:50.18Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5753.8x1 lm		
LumCAT: 5-2705-LM2	Test NO: 20260813-C014	Report NO: 20260813-B014
LED HOLDER: 92.70.549.00	DIM.: ϕ 111 H70	Lamp No.: 1
LampCAT: CITIZEN CLU048	MFR.: NATA	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	83	80	88	83	80	87	82	79	76
0.80	95	90	87	95	90	87	94	89	86	83
1.00	99	94	91	98	94	91	97	93	90	87
1.25	102	98	95	101	97	94	100	96	94	90
1.50	105	101	98	104	100	97	101	98	96	92
2.00	107	103	100	105	102	100	103	100	98	93
2.50	108	105	102	107	104	101	104	101	100	94
3.00	110	107	104	108	105	103	105	103	101	95
4.00	111	109	107	109	107	106	106	104	103	96
5.00	113	111	109	111	109	107	107	106	104	97
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.0°C
 Operators: ZJW
 Test Date: 2026-08-13

γ Range: 0 - 90DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.491
 Humidity: 60.0%
 Test Distance: 7.710m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:230.32V I:0.1996A P:39.938W PF:0.8688 Freq:50.18Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5753.8x1 lm		
LumCAT: 5-2705-LM2	Test NO: 20260813-C014	Report NO: 20260813-B014
LED HOLDER: 92.70.549.00	DIM.: ϕ 111 H70	Lamp No.: 1
LampCAT: CITIZEN CLU048	MFR.: NATA	

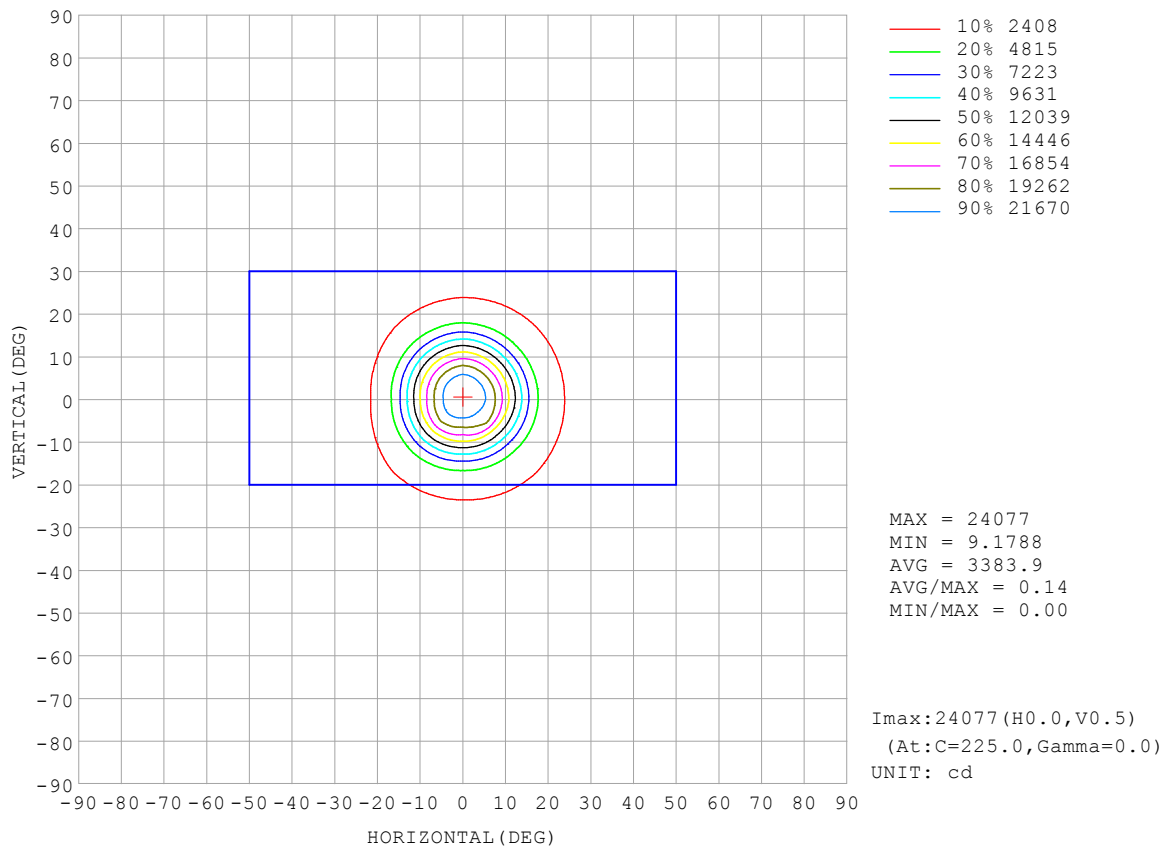


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0°C
Operators:ZJW
Test Date:2026-08-13

γ Range: 0 - 90DEG
 γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

AAI Figure

Test:U:230.32V I:0.1996A P:39.938W PF:0.8688 Freq:50.18Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5753.8x1 lm		
LumCAT: 5-2705-LM2	Test NO: 20260813-C014	Report NO: 20260813-B014
LED HOLDER: 92.70.549.00	DIM.: ϕ 111 H70	Lamp No.: 1
LampCAT: CITIZEN CLU048	MFR.: NATA	

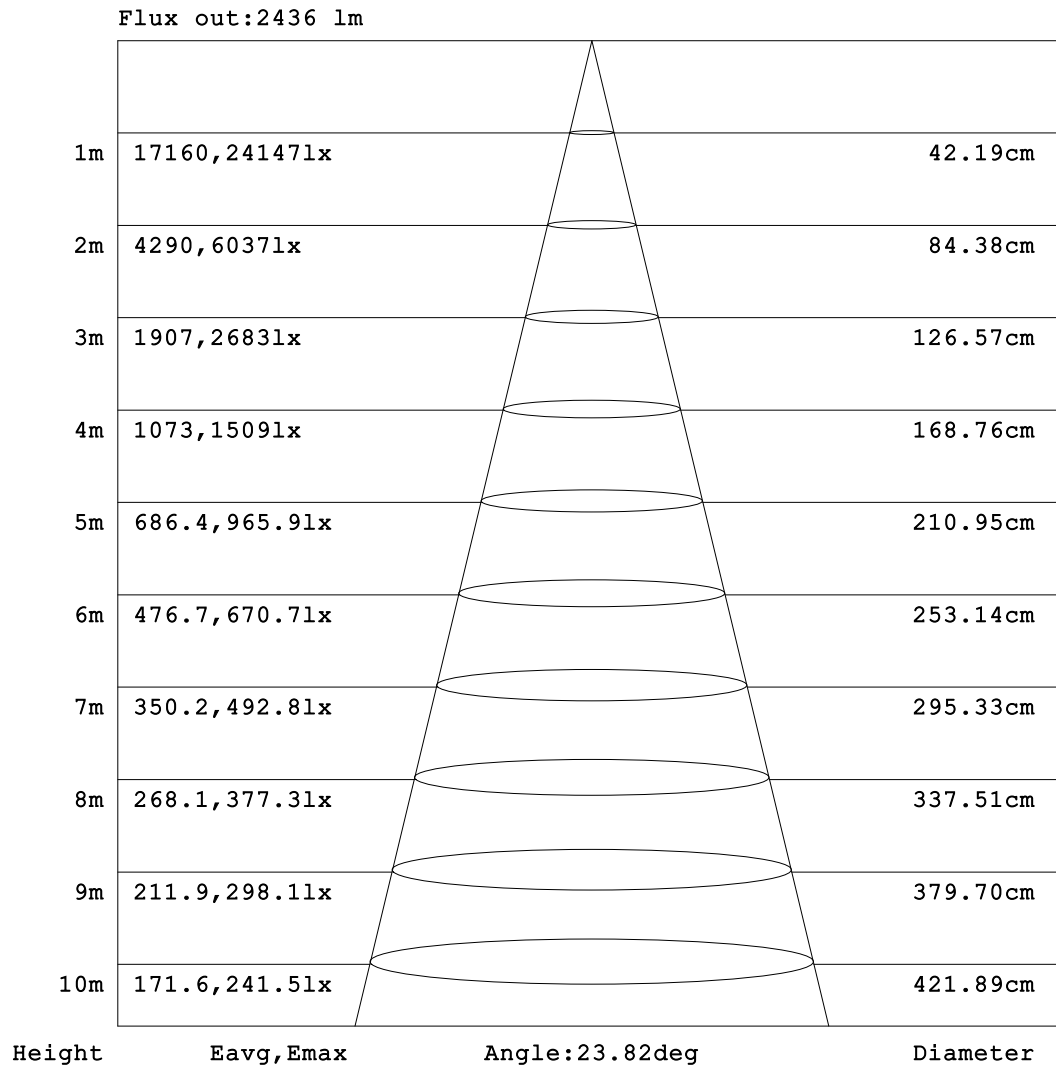


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0°C
Operators:ZJW
Test Date:2026-08-13

γ Range: 0 - 90DEG
 γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:230.32V I:0.1996A P:39.938W PF:0.8688 Freq:50.18Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5753.8x1 lm		
LumCAT: 5-2705-LM2	Test NO: 20260813-C014	Report NO: 20260813-B014
LED HOLDER: 92.70.549.00	DIM.: $\phi 111$ H70	Lamp No.: 1
LampCAT: CITIZEN CLU048	MFR.: NATA	

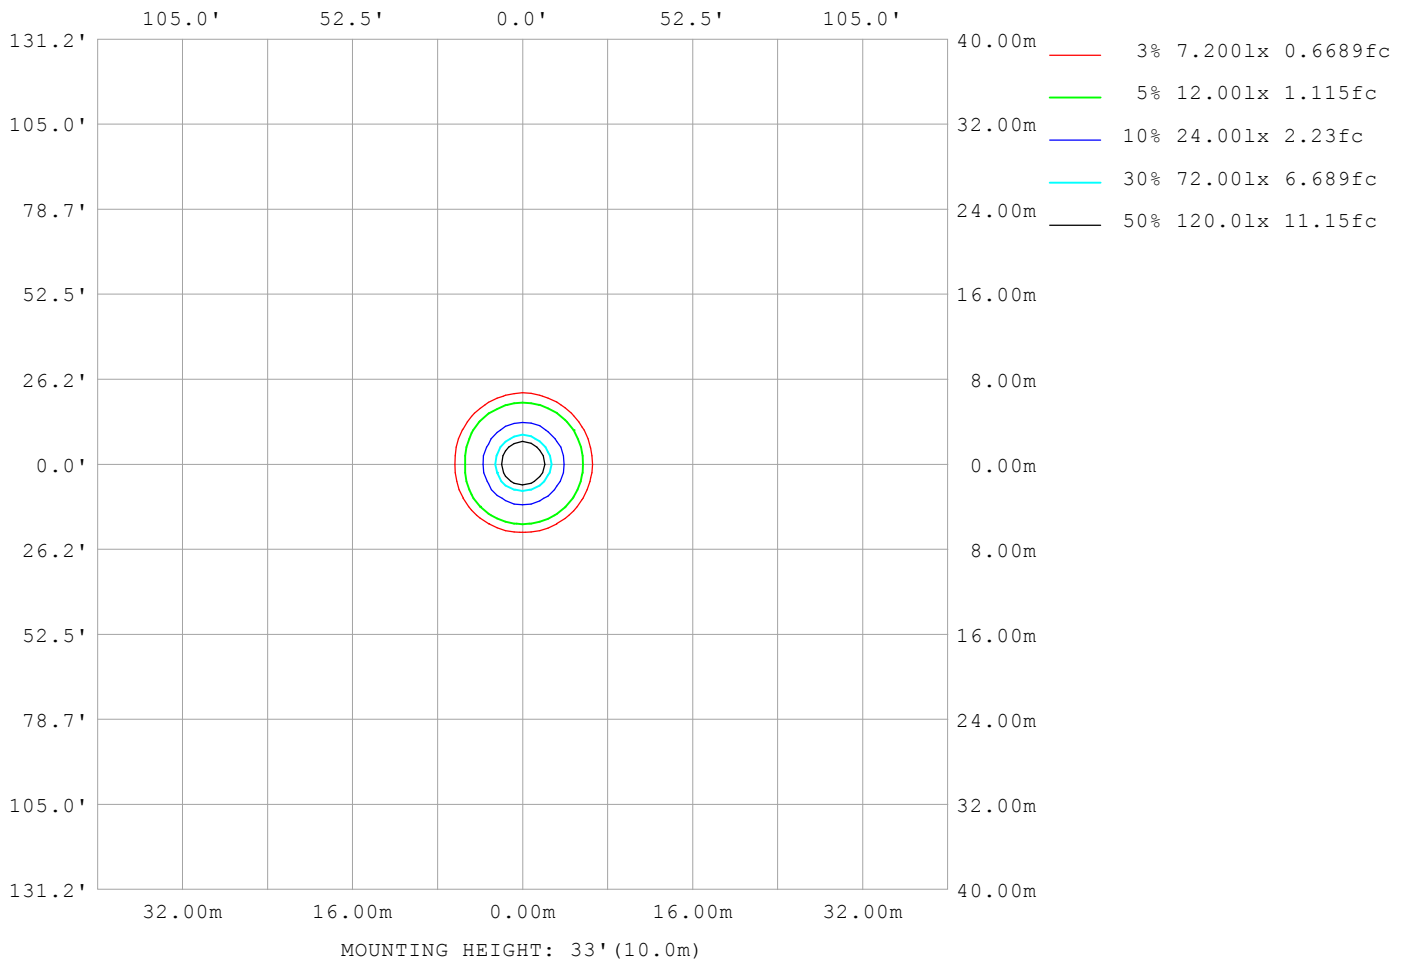

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0°C
Operators:ZJW
Test Date:2026-08-13

γ Range: 0 - 90DEG
 γ Interval: 2.0DEG
 γ Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:230.32V I:0.1996A P:39.938W PF:0.8688 Freq:50.18Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5753.8x1 lm		
LumCAT: 5-2705-LM2	Test NO: 20260813-C014	Report NO: 20260813-B014
LED HOLDER: 92.70.549.00	DIM.: ϕ 111 H70	Lamp No.: 1
LampCAT: CITIZEN CLU048	MFR.: NATA	


AvgL	cd/m2
L_0~180 (65) av	4
L_0~180 (75) av	9
L_0~180 (85) av	20
L_90~270 (65) av	4
L_90~270 (75) av	8
L_90~270 (85) av	20
L_45 (65) av	4
L_45 (75) av	9
L_45 (85) av	20

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.0℃
Operators:ZJW
Test Date:2026-08-13

γ Range: 0 - 90DEG
 γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

Planar Illuminance Curve

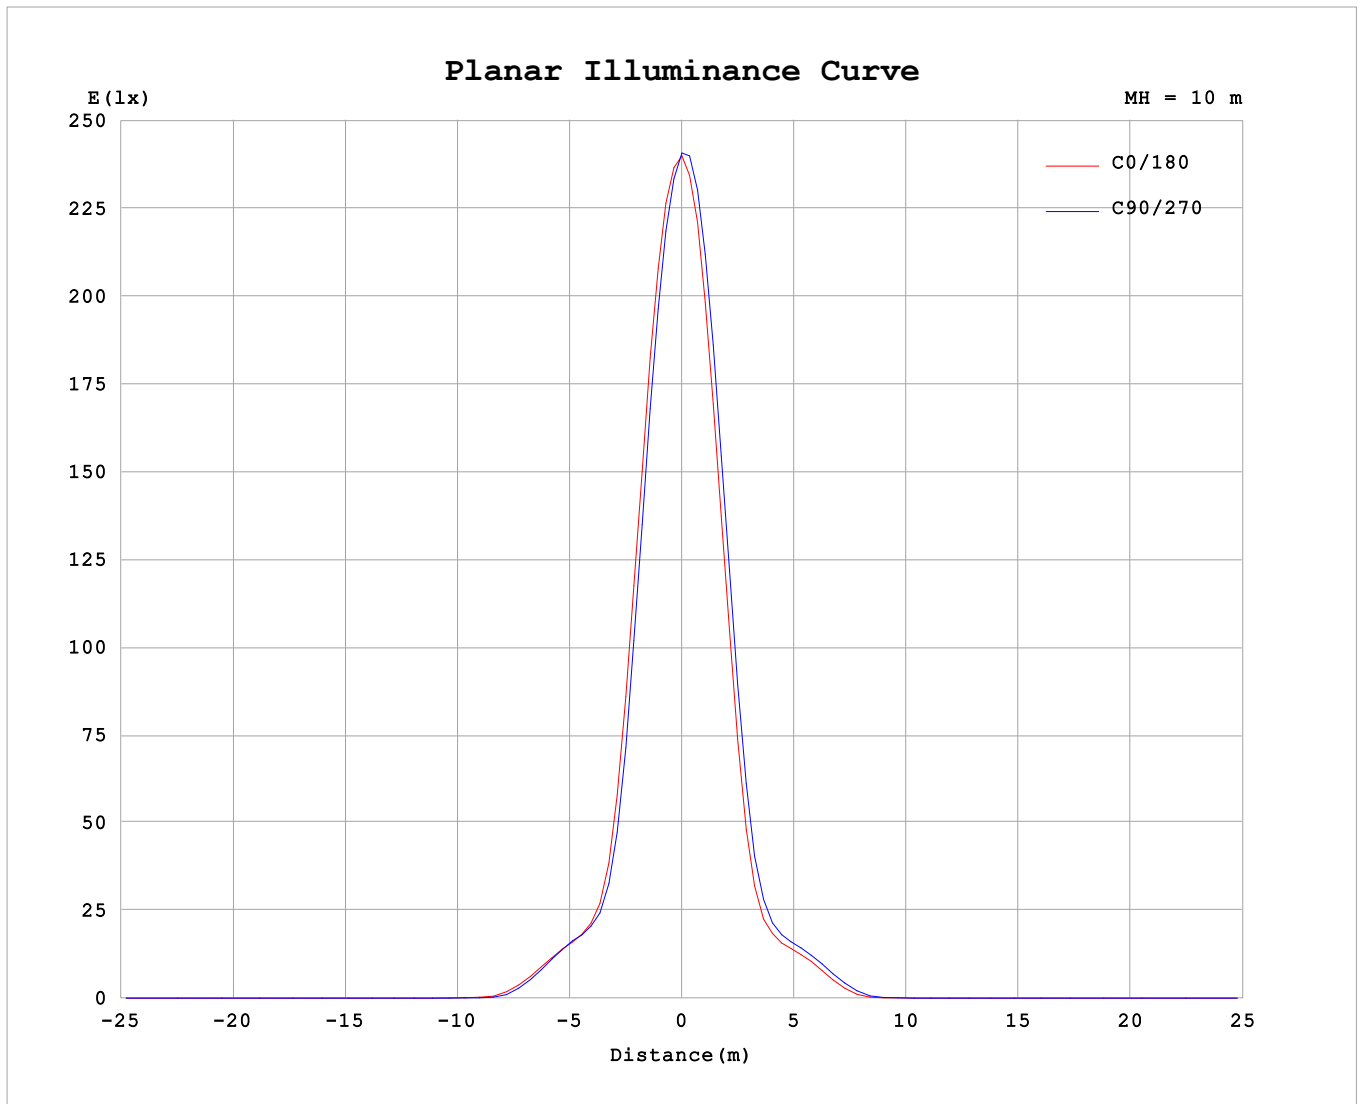

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.0°C
 Operators: ZJW
 Test Date: 2026-08-13

γ Range: 0 - 90DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.491
 Humidity: 60.0%
 Test Distance: 7.710m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.32V I:0.1996A P:39.938W PF:0.8688 Freq:50.18Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5753.8x1 lm		
LumCAT: 5-2705-LM2	Test NO: 20260813-C014	Report NO: 20260813-B014
LED HOLDER: 92.70.549.00	DIM.: φ111 H70	Lamp No.: 1
LampCAT: CITIZEN CLU048	MFR.: NATA	

Table--1

UNIT: X10cd

[illegible]

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.0°C
Operators: ZJW
Test Date: 2026-08-13

```

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.491
Humidity:60.0%
Test Distance:7.710m [K=1.0000]
Remarks:

```