


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:32.46V I:0.500A P:16.2W PF:1.000 Freq:0Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2709.39x1 lm		
NAME: 4-2757-A-1		
SPEC.: DC-36V/500mA		
MFR.: NATA		

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 151.33 lm/W
MODEL	CREE CMU2239-500mA	Imax (cd)	9393	S/MH(C0/180)	0.42	
NOMINAL POWER(W)	20	LOR(%)	90.6	S/MH(C90/270)	0.41	
RATED VOLTAGE(V)	36	TOTAL FLUX(lm)	2454.3	η UP,DN(C0-180)	0.0,42.5	
NOMINAL FLUX(lm)	2709.39	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,48.1	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE(V)	32.4	η down (%)	90.6	CIBSE SHR MAX	0.30	

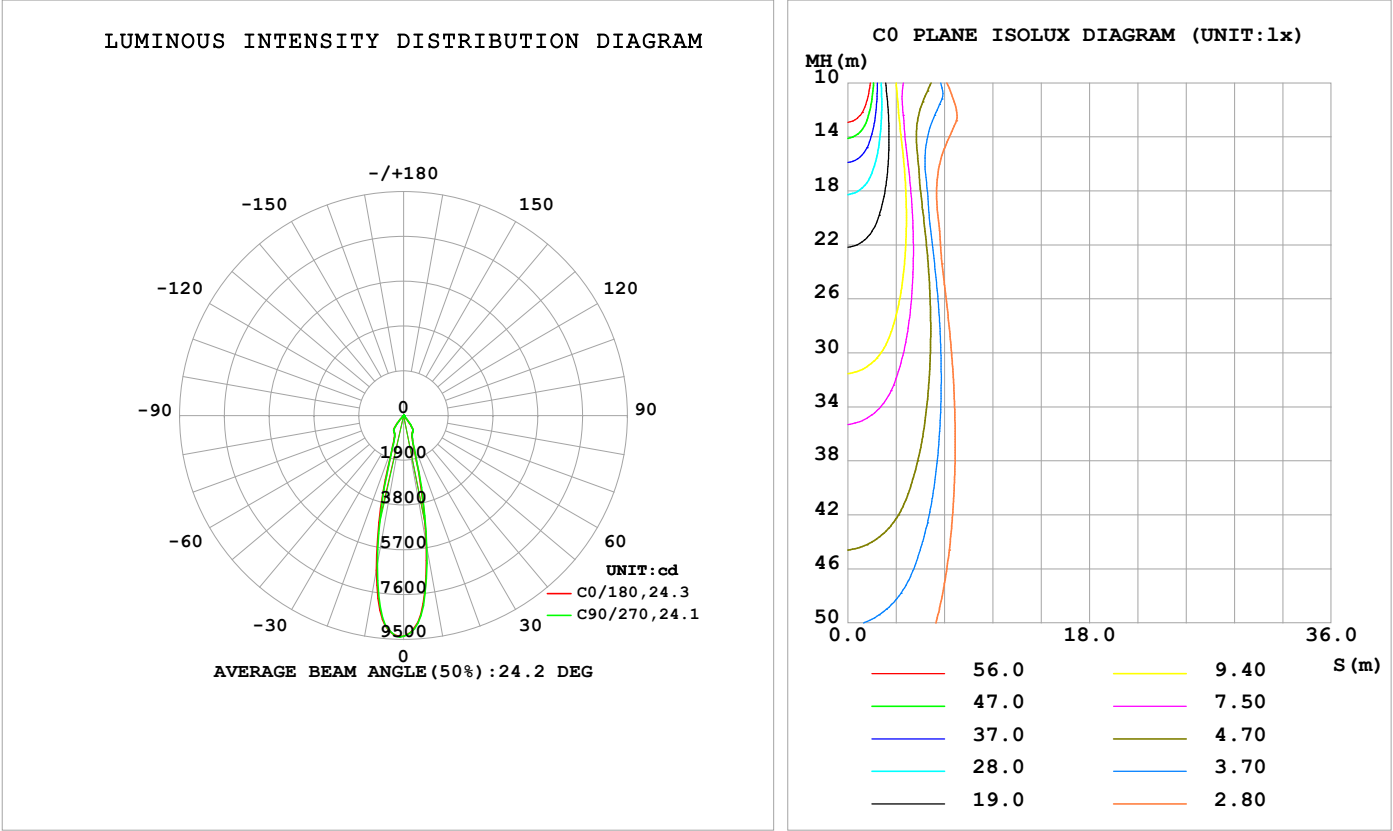

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25℃
Operators:LI
Test Date:2025-05-07

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	5560	5473	5678	6022	6665	6704	6459	6141	0- 10	745.6	745.6	30.4,27.5
20	1116	1114	1151	1209	1351	1397	1308	1225	10- 20	824.5	1570	64,58
30	786.0	784.8	790.4	797.3	808.0	814.9	809.1	802.5	20- 30	426.3	1996	81.3,73.7
40	258.4	258.9	287.0	331.7	401.5	408.3	379.4	330.8	30- 40	397.2	2394	97.5,88.3
50	1.314	1.189	1.575	1.634	1.657	1.535	1.628	1.581	40- 50	59.31	2453	99.9,90.5
60	0.5258	0.4414	0.5836	0.5347	0.5092	0.5720	0.5928	0.6082	50- 60	0.8153	2454	100,90.6
70	0.2342	0.1609	0.2501	0.2024	0.1768	0.2340	0.2080	0.2444	60- 70	0.3488	2454	100,90.6
80	0.1197	0.0935	0.1354	0.0831	0.1293	0.1248	0.0885	0.1195	70- 80	0.1577	2454	100,90.6
90	0.2549	0.1403	0.0937	0.0831	0.1249	0.1091	0.0885	0.0883	80- 90	0.1134	2454	100,90.6
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2451 lm

%lum = 99.9%

%lamp = 90.5%

Conical surface Flux(130deg): 2453.9 lm

%lum = 100.0%


%lamp = 90.6%

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:LI
Test Date:2025-05-07

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:32.46V I:0.500A P:16.2W PF:1.000 Freq:0Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2709.39x1 lm		
NAME: 4-2757-A-1		
SPEC.: DC-36V/500mA		
MFR.: NATA		

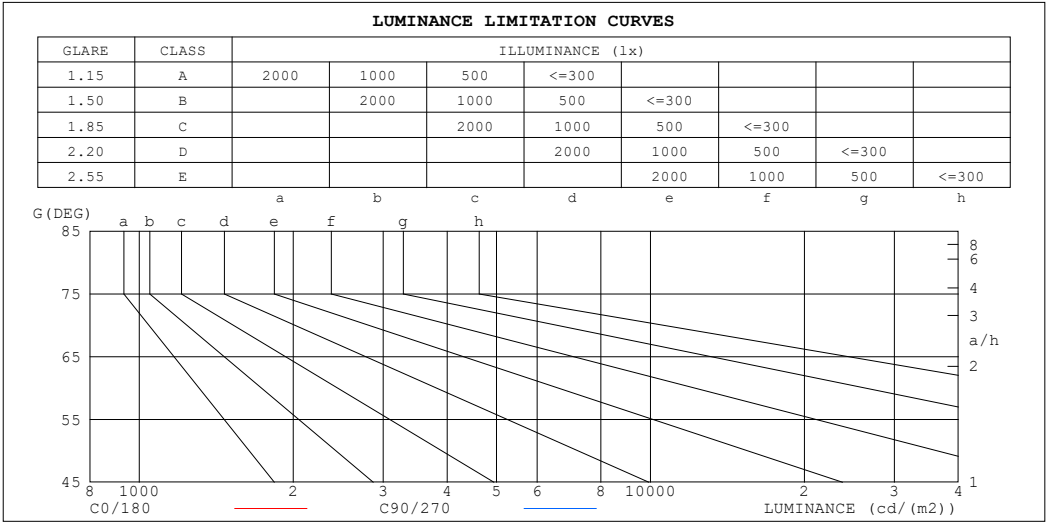

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	27	27
80	15	17
75	13	15
70	15	16
65	18	20
60	23	26
55	31	36
50	45	54
45	118	184


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25℃
Operators:LI
Test Date:2025-05-07

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:32.46V I:0.500A P:16.2W PF:1.000 Freq:0Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0		
Lamp Flux:2709.39x1 lm		
NAME: 4-2757-A-1		
SPEC.: DC-36V/500mA		
MFR.: NATA		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

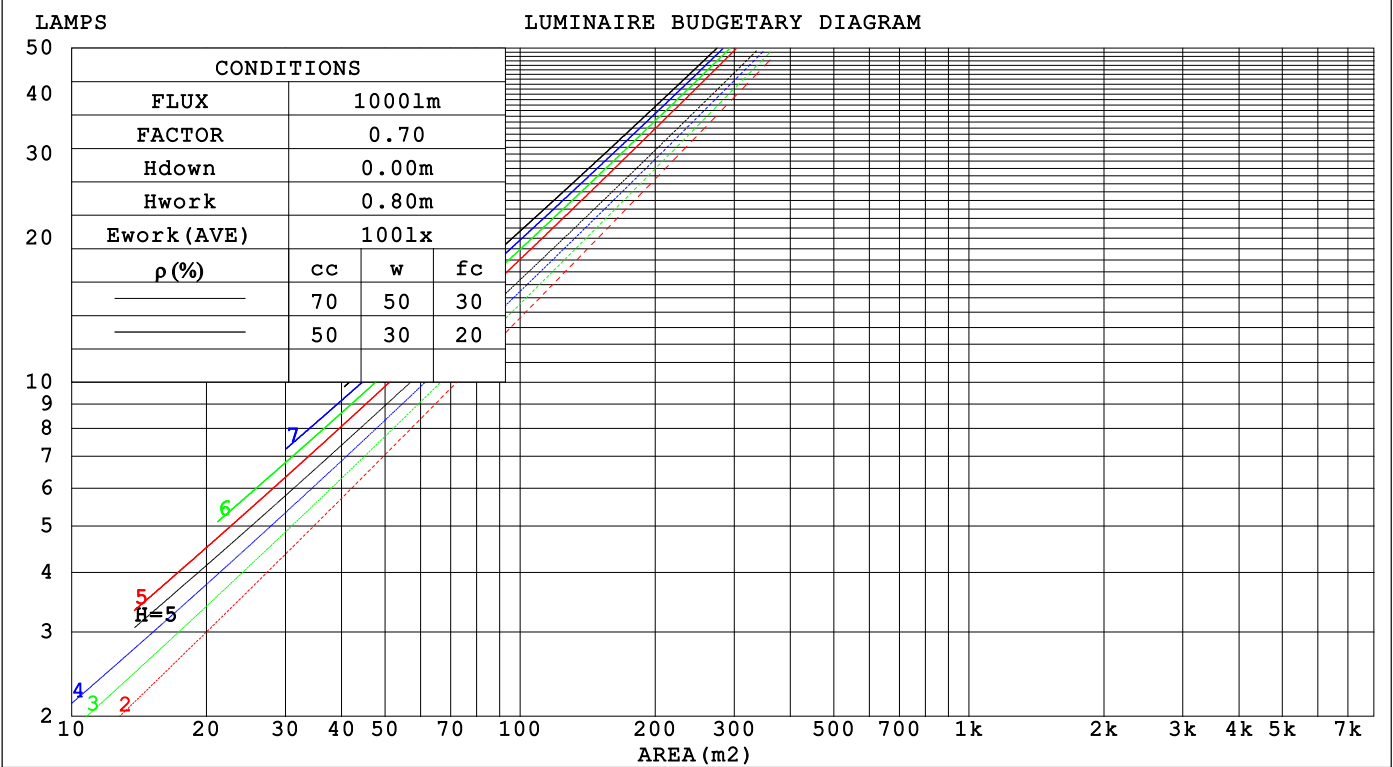

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25℃
Operators:LI
Test Date:2025-05-07

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:32.46V I:0.500A P:16.2W PF:1.000 Freq:0Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2709.39x1 lm		
NAME: 4-2757-A-1		
SPEC.: DC-36V/500mA		
MFR.: NATA		

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.136	.077	.024	.130	.074	.024	.119	.068	.022	.108	.062	.020	.099	.057	.018															
2.0	.128	.070	.022	.123	.068	.021	.114	.063	.020	.105	.059	.018	.097	.055	.017															
3.0	.121	.064	.019	.117	.062	.019	.109	.059	.018	.101	.056	.017	.095	.052	.016															
4.0	.114	.059	.017	.111	.058	.017	.104	.055	.016	.098	.052	.016	.092	.050	.015															
5.0	.108	.055	.016	.105	.054	.016	.099	.052	.015	.094	.050	.015	.089	.048	.014															
6.0	.103	.052	.015	.100	.051	.015	.095	.049	.014	.091	.047	.014	.086	.045	.013															
7.0	.098	.048	.014	.096	.048	.014	.091	.046	.013	.087	.045	.013	.083	.043	.013															
8.0	.094	.046	.013	.092	.045	.013	.088	.044	.013	.084	.043	.012	.081	.041	.012															
9.0	.090	.043	.012	.088	.043	.012	.084	.042	.012	.081	.041	.012	.078	.040	.011															
10.0	.086	.041	.011	.084	.041	.011	.081	.040	.011	.078	.039	.011	.076	.038	.011															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.173	.173	.173	.147	.147	.147	.101	.101	.101	.058	.058	.058	.018	.018	.018	
1.0	.153	.143	.133	.131	.122	.115	.090	.084	.079	.052	.049	.046	.017	.016	.015	
2.0	.138	.120	.105	.118	.103	.091	.081	.072	.063	.047	.042	.037	.015	.013	.012	
3.0	.125	.103	.085	.107	.089	.074	.074	.062	.052	.043	.036	.030	.014	.012	.010	
4.0	.115	.089	.069	.098	.077	.060	.068	.054	.042	.039	.031	.025	.013	.010	.008	
5.0	.106	.078	.058	.091	.068	.050	.063	.047	.035	.036	.028	.021	.012	.009	.007	
6.0	.098	.069	.049	.084	.060	.042	.058	.042	.030	.034	.025	.018	.011	.008	.006	
7.0	.092	.062	.041	.079	.054	.036	.054	.038	.025	.032	.022	.015	.010	.007	.005	
8.0	.086	.056	.036	.074	.049	.031	.051	.034	.022	.030	.020	.013	.010	.007	.004	
9.0	.081	.051	.031	.070	.044	.027	.048	.031	.019	.028	.018	.011	.009	.006	.004	
10.0	.077	.047	.027	.066	.041	.024	.046	.029	.017	.027	.017	.010	.009	.006	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:LI
Test Date:2025-05-07

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:32.46V I:0.500A P:16.2W PF:1.000 Freq:0Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2709.39x1 lm										
NAME: 4-2757-A-1										
SPEC.: DC-36V/500mA										
MFR.: NATA										
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.0	17.8	17.2	17.9	18.1	17.1	17.9	17.3	18.0	18.2
3H	16.9	17.6	17.1	17.8	18.0	17.0	17.7	17.2	17.9	18.1
4H	16.8	17.5	17.1	17.7	17.9	16.9	17.6	17.2	17.8	18.0
6H	16.7	17.3	17.0	17.6	17.8	16.8	17.4	17.1	17.7	17.9
8H	16.7	17.3	17.0	17.5	17.8	16.8	17.4	17.1	17.6	17.9
12H	16.6	17.2	16.9	17.5	17.7	16.7	17.3	17.0	17.6	17.8
4H 2H	16.8	17.5	17.1	17.7	17.9	16.9	17.6	17.2	17.8	18.0
3H	16.6	17.2	16.9	17.5	17.7	16.7	17.3	17.0	17.6	17.8
4H	16.5	17.1	16.9	17.3	17.6	16.6	17.2	17.0	17.4	17.7
6H	16.4	16.9	16.8	17.2	17.6	16.5	17.0	16.9	17.3	17.7
8H	16.4	16.8	16.8	17.2	17.5	16.5	16.9	16.9	17.3	17.6
12H	16.3	16.7	16.7	17.1	17.5	16.4	16.8	16.8	17.2	17.6
8H 4H	16.4	16.8	16.8	17.2	17.5	16.5	16.9	16.9	17.3	17.6
6H	16.3	16.6	16.7	17.0	17.4	16.4	16.7	16.8	17.1	17.5
8H	16.2	16.5	16.6	16.9	17.4	16.3	16.6	16.7	17.0	17.5
12H	16.1	16.4	16.6	16.9	17.3	16.2	16.5	16.7	17.0	17.4
12H 4H	16.3	16.7	16.7	17.1	17.5	16.4	16.8	16.8	17.2	17.6
6H	16.2	16.5	16.6	16.9	17.4	16.3	16.6	16.7	17.0	17.5
8H	16.1	16.4	16.6	16.9	17.3	16.2	16.5	16.7	17.0	17.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 4.1 / -30.8					+ 4.1 / -30.6				
1.5H	+ 6.9 / -29.7					+ 6.9 / -29.7				
2.0H	+ 5.6 / - 2.8					+ 7.3 / - 3.7				

CIE Pub.117, 2709 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.5)
 Area: 0.045 m2

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25℃
 Operators:LI
 Test Date:2025-05-07

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.485
 Humidity:65.0%
 Test Distance:8.300m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:32.46V I:0.500A P:16.2W PF:1.000 Freq:0Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2709.39x1 lm		
NAME: 4-2757-A-1		
SPEC.: DC-36V/500mA		
MFR.: NATA		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	82	76	73	81	76	73	80	76	73	70
0.80	88	83	80	87	83	80	86	82	80	77
1.00	92	87	84	91	87	84	89	86	83	80
1.25	95	91	88	94	90	87	92	89	87	83
1.50	97	93	91	96	93	90	94	91	89	85
2.00	99	96	93	98	95	92	96	93	91	87
2.50	101	97	95	99	96	94	96	94	92	87
3.00	102	99	97	100	98	96	97	95	94	88
4.00	104	101	99	102	100	98	99	97	96	89
5.00	105	103	101	103	101	100	99	98	97	90
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25°C
 Operators: LI
 Test Date: 2025-05-07

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.485
 Humidity: 65.0%
 Test Distance: 8.300m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:32.46V I:0.500A P:16.2W PF:1.000 Freq:0Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2709.39x1 lm		
NAME: 4-2757-A-1		
SPEC.: DC-36V/500mA		
MFR.: NATA		

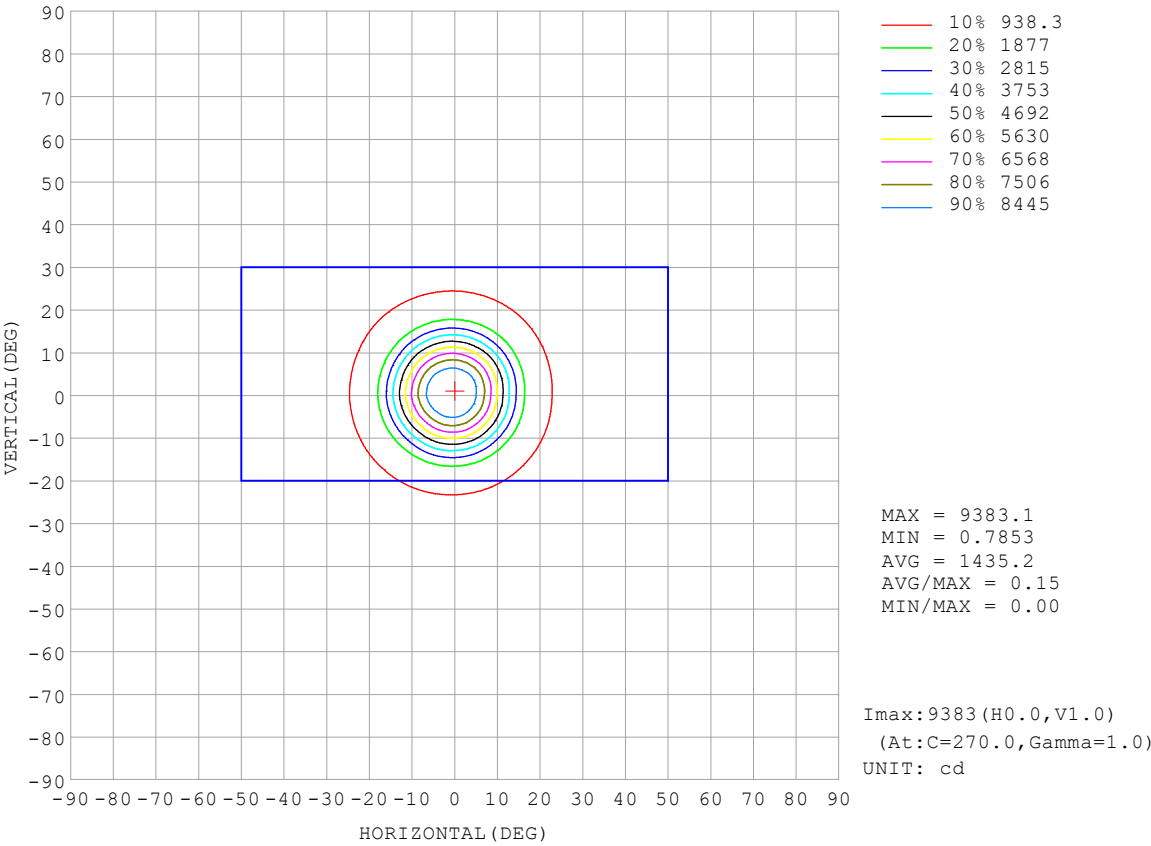

C Range: 0 - 360DEG	γ Range: 0 - 90DEG
C Interval: 45.0DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.485
Temperature:25℃	Humidity:65.0%
Operators:LI	Test Distance:8.300m [K=1.0000]
Test Date:2025-05-07	Remarks:

AAI Figure

Test:U:32.46V I:0.500A P:16.2W PF:1.000 Freq:0Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2709.39x1 lm		
NAME: 4-2757-A-1		
SPEC.: DC-36V/500mA		
MFR.: NATA		

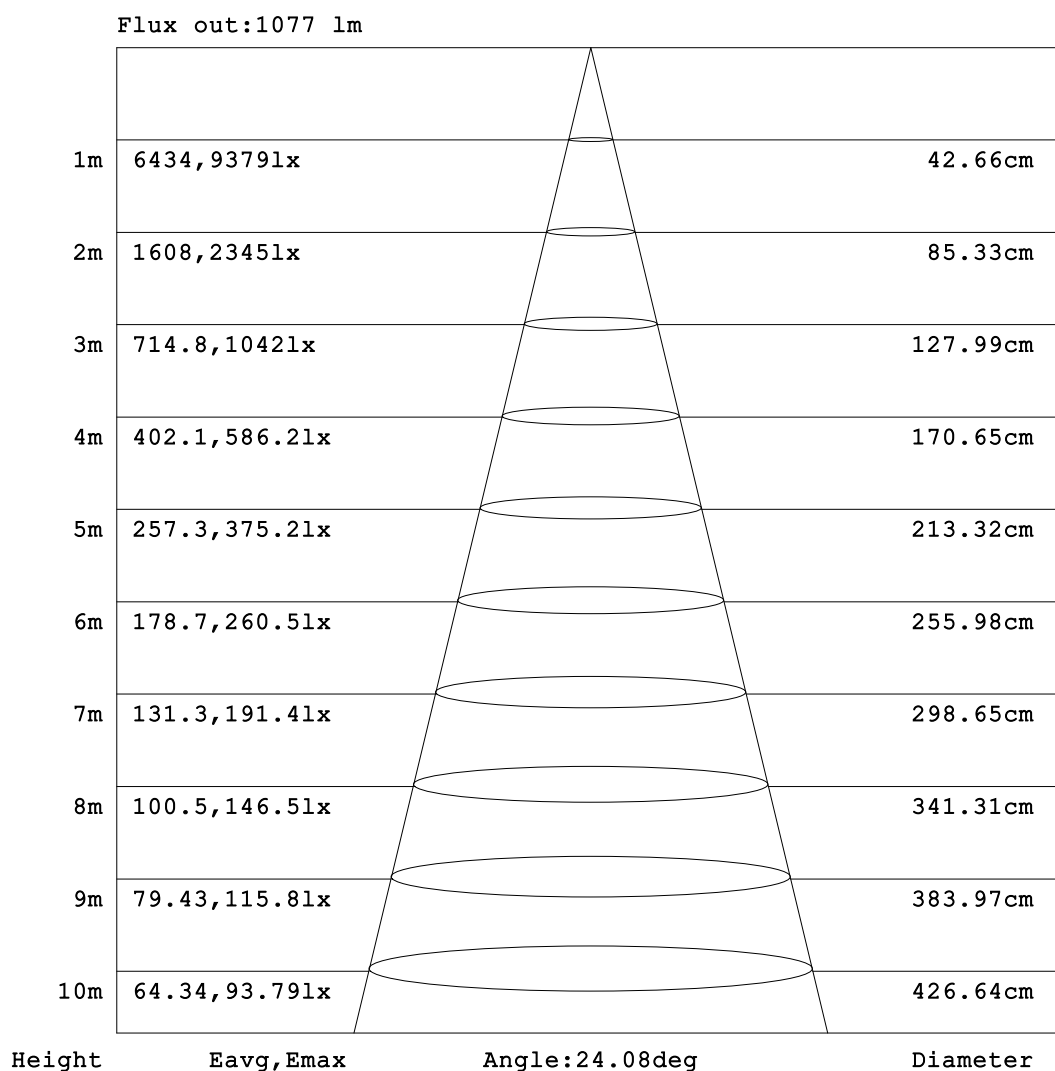


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25℃
 Operators:LI
 Test Date:2025-05-07

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.485
 Humidity:65.0%
 Test Distance:8.300m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:32.46V I:0.500A P:16.2W PF:1.000 Freq:0Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2709.39x1 lm		
NAME: 4-2757-A-1		
SPEC.: DC-36V/500mA		
MFR.: NATA		

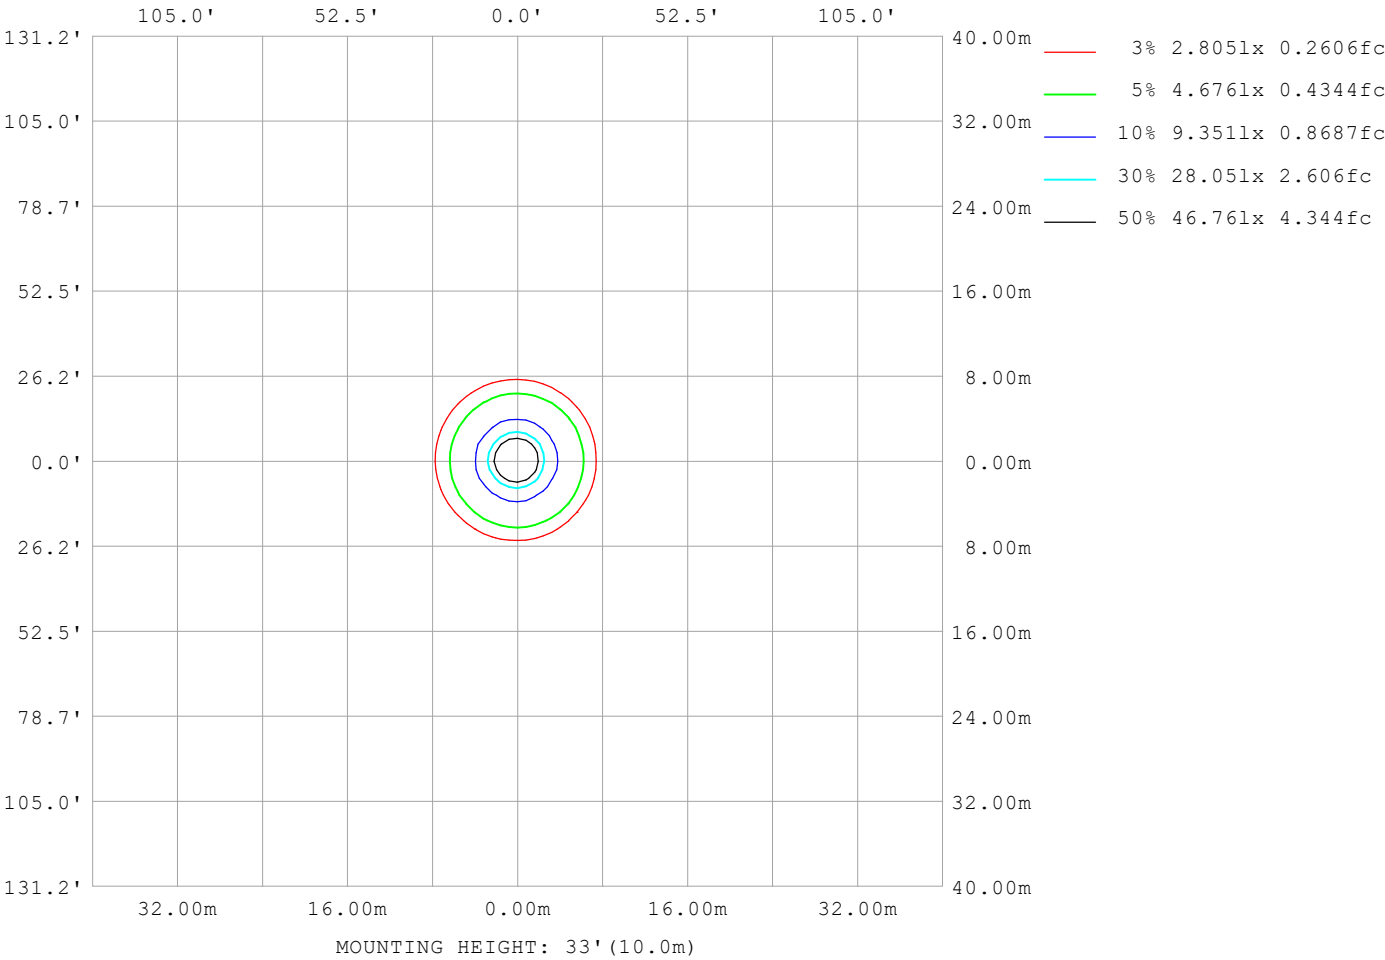

C Range: 0 - 360DEG	γ Range: 0 - 90DEG
C Interval: 45.0DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.485
Temperature:25℃	Humidity:65.0%
Operators:LI	Test Distance:8.300m [K=1.0000]
Test Date:2025-05-07	Remarks:

LED Avg.L Report

Test:U:32.46V I:0.500A P:16.2W PF:1.000 Freq:0Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2709.39x1 lm		
NAME: 4-2757-A-1		
SPEC.: DC-36V/500mA		
MFR.: NATA		


AvgL	cd/m2
L_0~180 (65) av	17
L_0~180 (75) av	13
L_0~180 (85) av	29
L_90~270 (65) av	19
L_90~270 (75) av	13
L_90~270 (85) av	25
L_45 (65) av	18
L_45 (75) av	12
L_45 (85) av	24

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25℃
Operators:LI
Test Date:2025-05-07

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

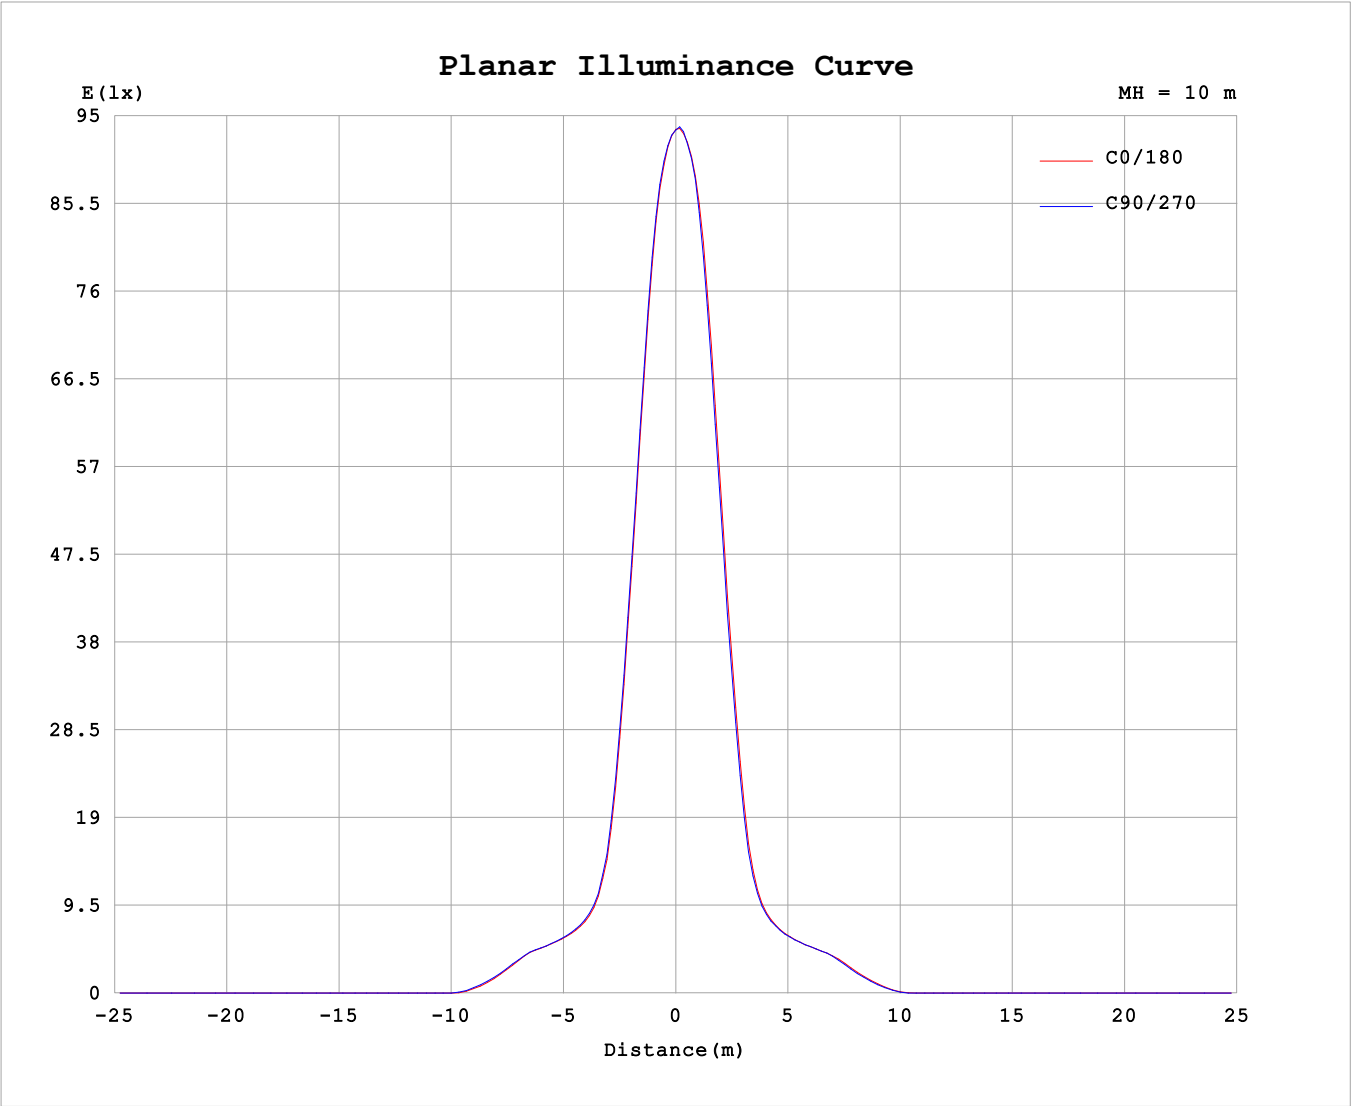

C Range: 0 - 360DEG	γ Range: 0 - 90DEG
C Interval: 45.0DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.485
Temperature:25℃	Humidity:65.0%
Operators:LI	Test Distance:8.300m [K=1.0000]
Test Date:2025-05-07	Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

```