



NATA LIGHTING CO.,LTD.  
www.nata.cn  
Email:info@nata.com  
Tel:+86 571 85021543 Fax:+86 571 87977635  
Address:Address:380JinOu Road,GaoXin Zone,Jiang Men City,Guangdong,China

NT

Client: NT

LumCAT: 62-0085-1

Luminaire: 92.70.429.00

Report No: 20250326-B004

Ballast type: AC

Test No: 20250326-C004

Voltage(V): 34.930

LampCAT: CREE CXA1820

Current(A): 0.465

Lamp flux(lm): 2300.1

Power (W): 15.710

Number of Lamps: 1

PF: 0.000

Length(mm): 62

Width(mm): 62

Phm Type: C

Height(mm): 33

### Photometric Results

Lumens(lm): 2109.82, Efficiency(%): 91.73% , Luminous Efficacy(lm/W): 134.30

Central intensity(cd): 10168.960, Maximum intensity(cd): 10168.960

Angle of maximum intensity: C=0.0  $\gamma$ =0.0

Beam Angle(50%Imax): [C0/180]Total=24.4

[C90/270]Total=24.4

Field angle(10%Imax): [C0/180]Total=41.8

[C90/270]Total=41.8

Maximum s/h(1/2): C0\_180=0.41 C90\_270=0.41

Maximum s/h(1/4): C0\_180=0.40 C90\_270=0.40

Up flux rate of lamp(%): 0.00%

Down flux rate of lamp(%): 91.73%

Up flux rate of LUM(%): - -

Down flux rate of LUM(%): 100.00%

CIE Type : Direct lighting

Output flux ratio in  $\pi$  solid angle : 98.572%

Equipment: GMS 1800  
Temperature(°C): 25.0

Date: 2025/3/26  
Humidity(%): 60.0%

Operator: NT  
Distance(m): 7.30

$\gamma(^{\circ})$	Average I(cd)	Zonal F(lm)	Sum F(lm)	Eff Flux(%)	Eff Sum(%)
0.0	10168.958	0.000	0	0.00%	0.00%
1.0	10116.933	9.706	9.706	0.42%	0.46%
2.0	9989.903	28.859	38.566	1.25%	1.83%
3.0	9754.028	47.221	85.787	2.05%	4.07%
4.0	9455.471	64.300	150.087	2.80%	7.11%
5.0	9127.338	79.942	230.029	3.48%	10.90%
6.0	8714.607	93.764	323.793	4.08%	15.35%
7.0	8212.815	105.068	428.862	4.57%	20.33%
8.0	7698.633	113.875	542.737	4.95%	25.72%
9.0	7114.974	120.056	662.793	5.22%	31.41%
10.0	6456.377	122.816	785.609	5.34%	37.24%
11.0	5878.979	123.256	908.864	5.36%	43.08%
12.0	5195.335	121.058	1029.923	5.26%	48.82%
13.0	4554.257	115.703	1145.626	5.03%	54.30%
14.0	3965.868	109.057	1254.682	4.74%	59.47%
15.0	3355.032	100.505	1355.187	4.37%	64.23%
16.0	2845.513	90.855	1446.042	3.95%	68.54%
17.0	2382.156	81.409	1527.451	3.54%	72.40%
18.0	1949.575	71.421	1598.872	3.11%	75.78%
19.0	1491.341	59.865	1658.737	2.60%	78.62%
20.0	1186.888	49.019	1707.756	2.13%	80.94%
21.0	999.421	41.982	1749.738	1.83%	82.93%
22.0	802.288	36.206	1785.944	1.57%	84.65%
23.0	652.509	30.526	1816.469	1.33%	86.10%
24.0	524.420	25.732	1842.201	1.12%	87.32%
25.0	436.678	21.853	1864.054	0.95%	88.35%
26.0	363.964	18.899	1882.954	0.82%	89.25%
27.0	309.362	16.473	1899.427	0.72%	90.03%
28.0	270.094	14.671	1914.097	0.64%	90.72%
29.0	243.129	13.427	1927.525	0.58%	91.36%
30.0	201.769	12.012	1939.537	0.52%	91.93%
31.0	178.282	10.576	1950.113	0.46%	92.43%
32.0	150.284	9.413	1959.526	0.41%	92.88%
33.0	131.020	8.287	1967.813	0.36%	93.27%
34.0	115.226	7.452	1975.266	0.32%	93.62%
35.0	103.323	6.787	1982.053	0.30%	93.94%
36.0	92.145	6.224	1988.277	0.27%	94.24%
37.0	82.453	5.694	1993.971	0.25%	94.51%

$\gamma(^{\circ})$	Average I(cd)	Zonal F(lm)	Sum F(lm)	Eff Flux(%)	Eff Sum(%)
38.0	75.405	5.269	1999.24	0.23%	94.76%
39.0	68.764	4.921	2004.161	0.21%	94.99%
40.0	63.875	4.626	2008.787	0.20%	95.21%
41.0	59.771	4.403	2013.19	0.19%	95.42%
42.0	56.301	4.217	2017.407	0.18%	95.62%
43.0	53.923	4.083	2021.49	0.18%	95.81%
44.0	51.598	3.983	2025.473	0.17%	96.00%
45.0	49.793	3.897	2029.369	0.17%	96.19%
46.0	48.307	3.836	2033.206	0.17%	96.37%
47.0	46.995	3.790	2036.996	0.16%	96.55%
48.0	45.709	3.748	2040.744	0.16%	96.73%
49.0	44.364	3.699	2044.443	0.16%	96.90%
50.0	43.132	3.648	2048.091	0.16%	97.07%
51.0	41.606	3.585	2051.676	0.16%	97.24%
52.0	40.254	3.513	2055.189	0.15%	97.41%
53.0	38.768	3.437	2058.626	0.15%	97.57%
54.0	37.063	3.342	2061.968	0.15%	97.73%
55.0	35.425	3.236	2065.204	0.14%	97.89%
56.0	33.866	3.131	2068.335	0.14%	98.03%
57.0	32.260	3.023	2071.359	0.13%	98.18%
58.0	30.522	2.903	2074.262	0.13%	98.31%
59.0	28.930	2.779	2077.041	0.12%	98.45%
60.0	27.198	2.652	2079.693	0.12%	98.57%
61.0	25.566	2.518	2082.211	0.11%	98.69%
62.0	23.987	2.388	2084.599	0.10%	98.80%
63.0	22.355	2.254	2086.853	0.10%	98.91%
64.0	20.950	2.125	2088.977	0.09%	99.01%
65.0	19.411	1.997	2090.975	0.09%	99.11%
66.0	17.972	1.865	2092.84	0.08%	99.20%
67.0	16.660	1.741	2094.581	0.08%	99.28%
68.0	15.374	1.623	2096.204	0.07%	99.35%
69.0	14.015	1.499	2097.703	0.07%	99.43%
70.0	12.716	1.373	2099.076	0.06%	99.49%
71.0	11.584	1.256	2100.332	0.05%	99.55%
72.0	10.571	1.152	2101.484	0.05%	99.60%
73.0	9.739	1.062	2102.546	0.05%	99.66%
74.0	8.953	0.983	2103.529	0.04%	99.70%
75.0	8.213	0.907	2104.436	0.04%	99.74%



$\gamma(^{\circ})$	Average I(cd)	Zonal F(lm)	Sum F(lm)	Eff Flux(%)	Eff Sum(%)
76.0	7.381	0.828	2105.264	0.04%	99.78%
77.0	6.648	0.748	2106.012	0.03%	99.82%
78.0	5.968	0.675	2106.687	0.03%	99.85%
79.0	5.156	0.598	2107.285	0.03%	99.88%
80.0	4.543	0.523	2107.808	0.02%	99.90%
81.0	3.784	0.450	2108.258	0.02%	99.93%
82.0	3.177	0.377	2108.636	0.02%	99.94%
83.0	2.598	0.314	2108.949	0.01%	99.96%
84.0	2.038	0.253	2109.202	0.01%	99.97%
85.0	1.485	0.192	2109.394	0.01%	99.98%
86.0	1.046	0.138	2109.533	0.01%	99.99%
87.0	0.766	0.099	2109.632	0.00%	99.99%
88.0	0.580	0.074	2109.706	0.00%	99.99%
89.0	0.513	0.060	2109.765	0.00%	100.00%
90.0	0.460	0.053	2109.819	0.00%	100.00%

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-30	1939.54	84.32%	91.93%
0-40	2008.79	87.34%	95.21%
0-60	2079.69	90.42%	98.57%
0-90	2109.77	91.73%	100.00%
0-120	2109.77	91.73%	100.00%
0-180	2109.82	91.73%	100.00%
60-90	30.07	1.31%	1.43%
90-120	0.00	0.00%	0.00%
90-130	0.00	0.00%	0.00%
90-150	0.00	0.00%	0.00%
90-180	0.00	0.00%	0.00%
0-19.59	1687.86	73.38%	80.00%

ZONAL LUMEN SUMMARY

0-10	785.61
10-20	922.15
20-30	231.78
30-40	69.25
40-50	39.30
50-60	31.60
60-70	19.38
70-80	8.73
80-90	1.96
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

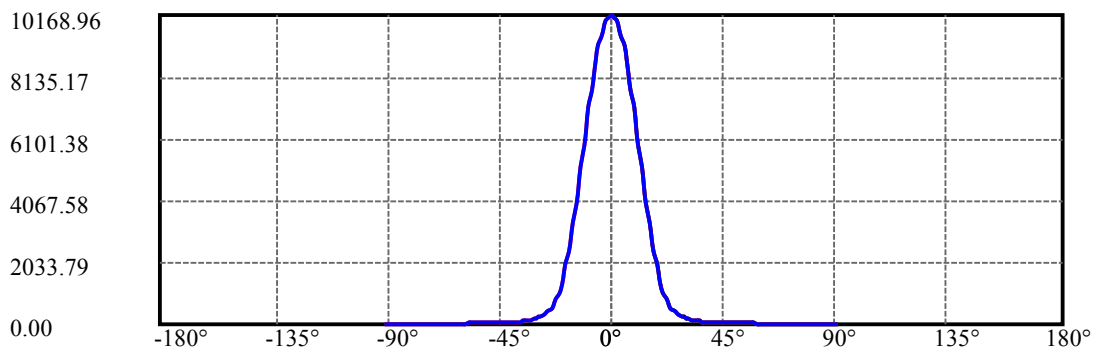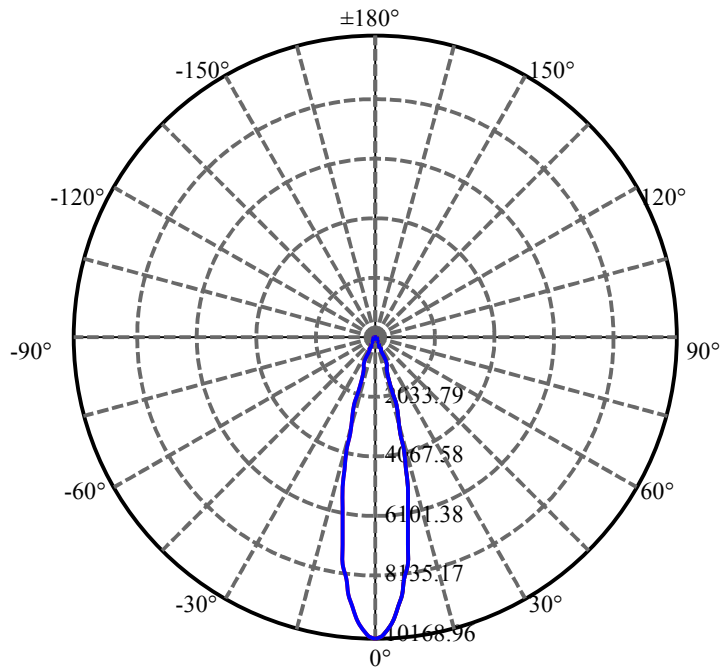

C0(Max): —————

C0/C180: —————


C90/C270: —————


Field angle(10%Imax):C0/180Left:20.9 Right:20.9

:C90/270Left:20.9 Right:20.9


Beam Angle(50%Imax):C0/180Left:12.2 Right:12.2

:C90/270Left:12.2 Right:12.2

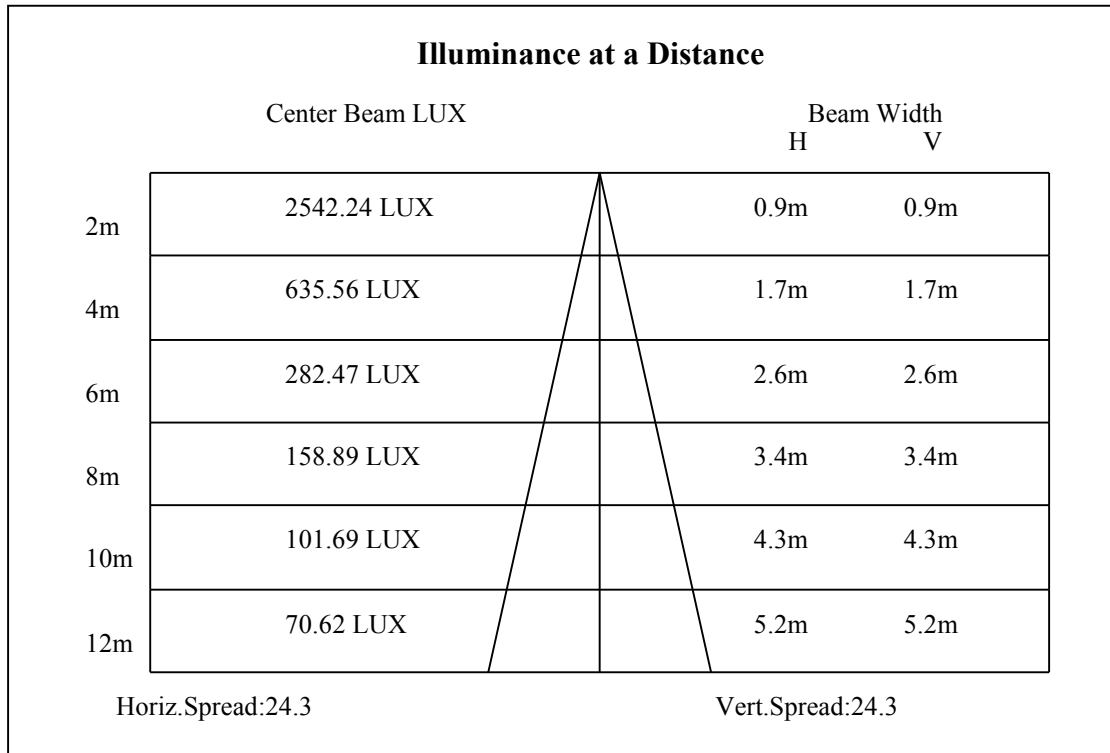

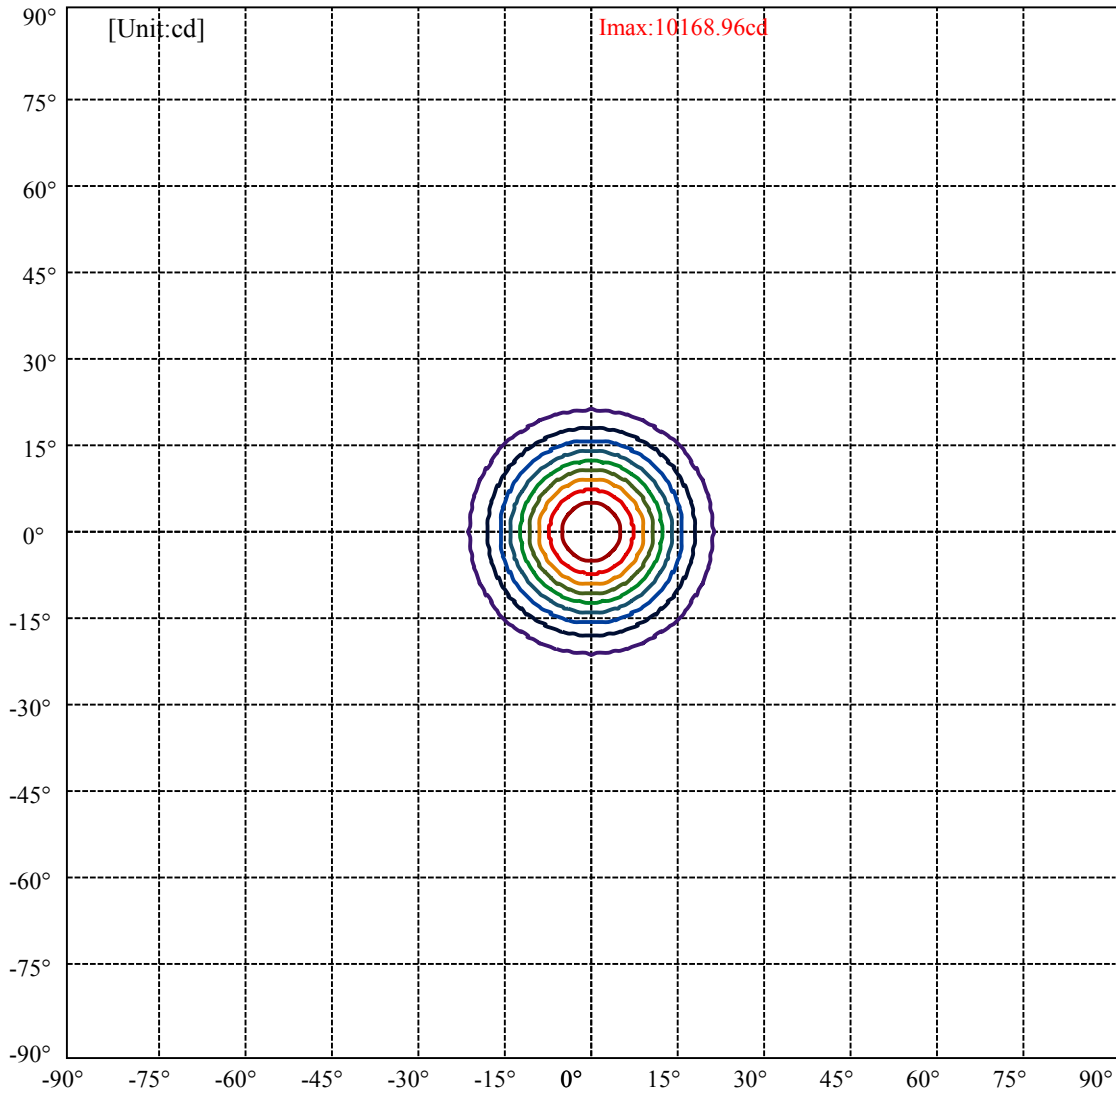

(10%Imax) 1016.9	—
(20%Imax) 2033.79	—
(30%Imax) 3050.69	—
(40%Imax) 4067.58	—
(50%Imax) 5084.48	—
(60%Imax) 6101.38	—
(70%Imax) 7118.27	—
(80%Imax) 8135.17	—
(90%Imax) 9152.06	—

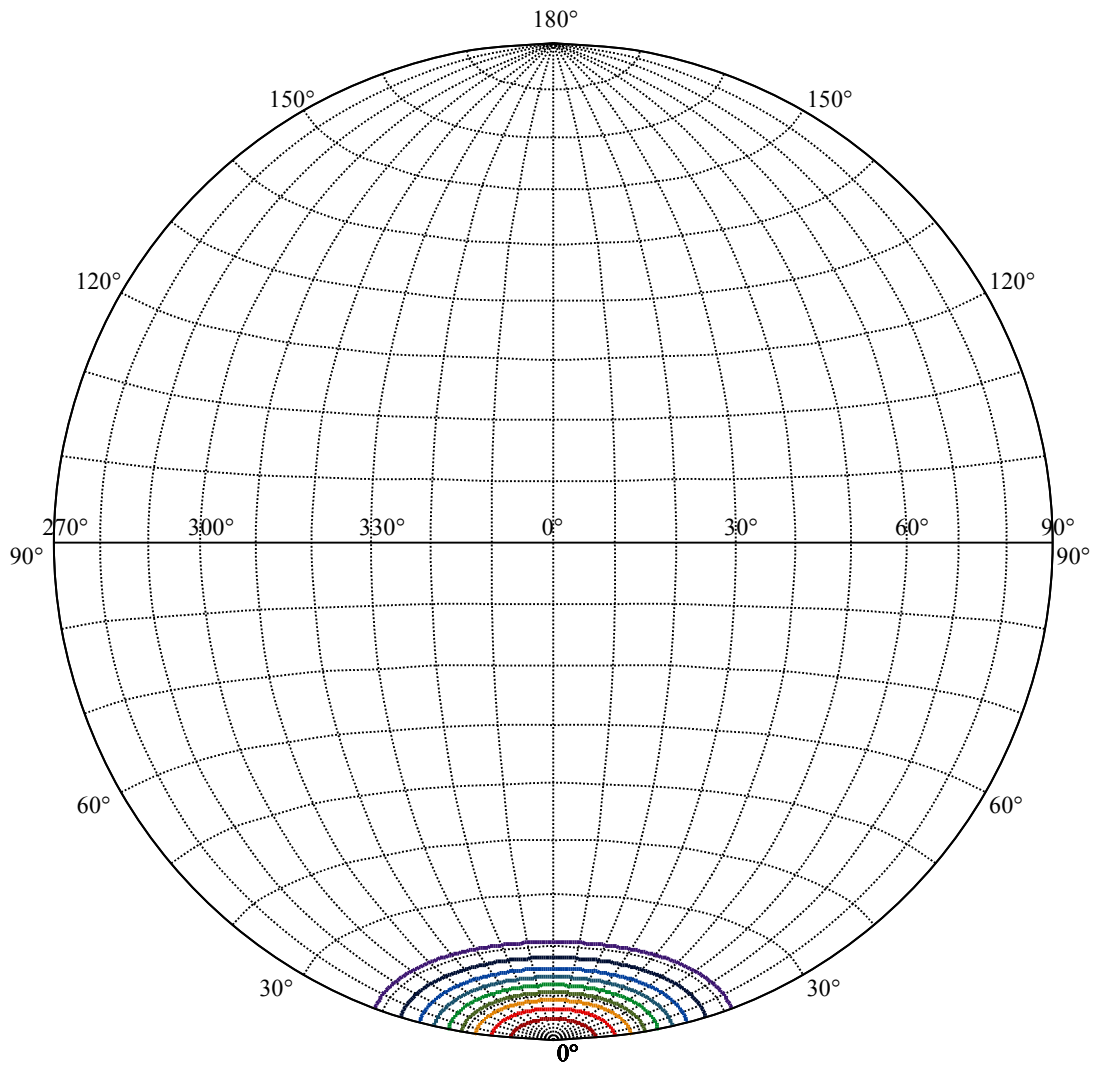


House

[Unit:cd]


Road

**Imax:10168.96**

(10%Imax)	1016.9	—
(20%Imax)	2033.79	—
(30%Imax)	3050.69	—
(40%Imax)	4067.58	—
(50%Imax)	5084.48	—
(60%Imax)	6101.38	—
(70%Imax)	7118.27	—
(80%Imax)	8135.17	—
(90%Imax)	9152.06	—

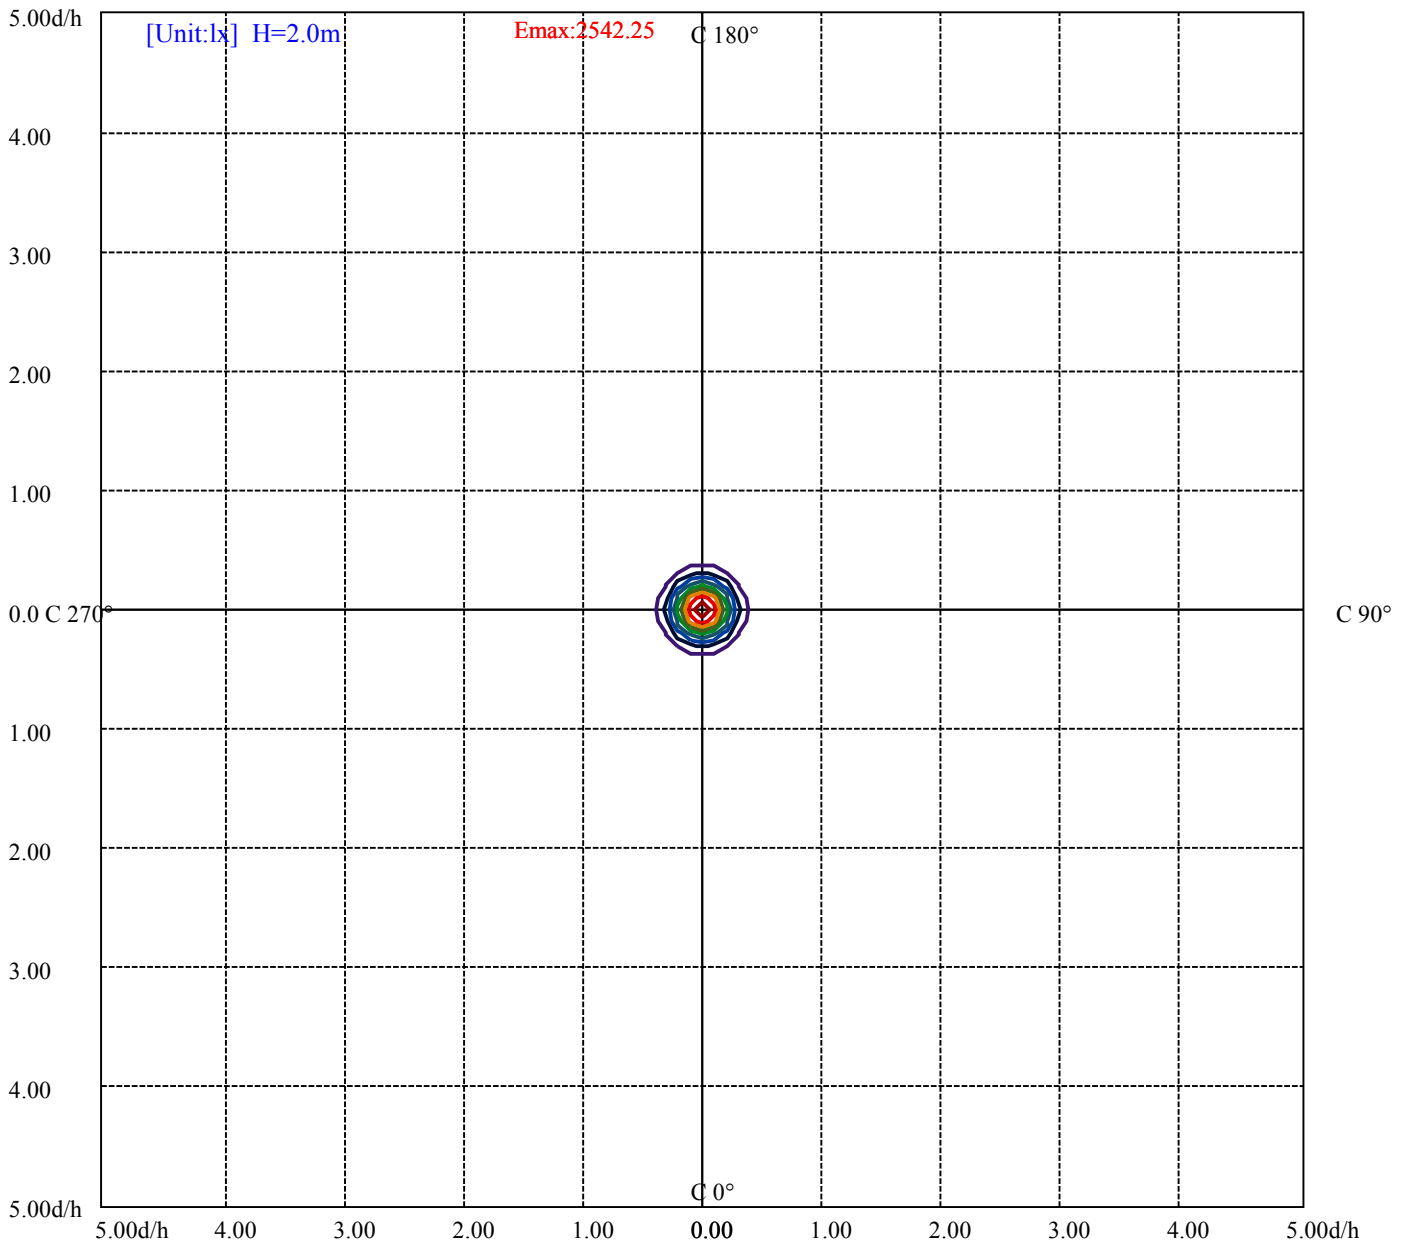

(10%Emax) 254.225	—
(20%Emax) 508.4475	—
(30%Emax) 762.6725	—
(40%Emax) 1016.895	—
(50%Emax) 1271.12	—
(60%Emax) 1525.343	—
(70%Emax) 1779.568	—
(80%Emax) 2033.79	—
(90%Emax) 2288.015	—

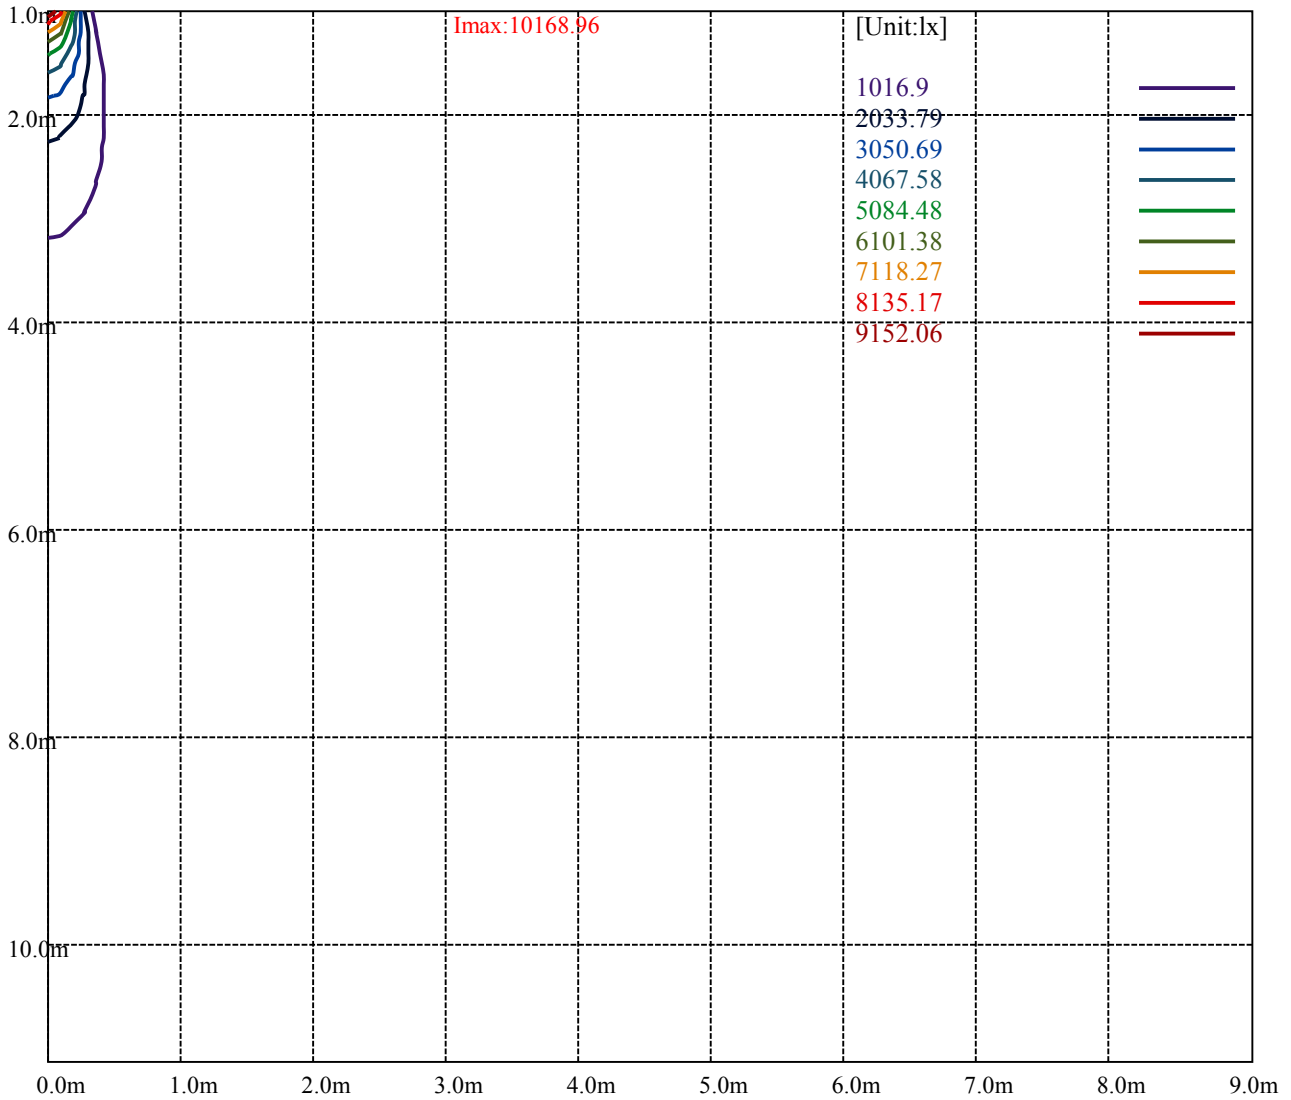

Luminance Table


$\gamma$	45	50	55	60	65	70	75	80	85
C0	11955	10681	9128	7363	5580	3928	2764	1694	626
C45	10452	9202	7743	6142	4571	3153	2167	1292	462
C90	11955	10681	9128	7363	5580	3928	2764	1694	626


L(Hor)(65)	L(Ver)(65)	L45(65)	L(Hor)(75)	L(Ver)(75)	L45(75)	L(Hor)(85)	L(Ver)(85)	L45(85)
11949	11949	11949	8255	8255	8255	4434	4434	4434

Glare Table


Glare	Quality	Service Values Illuminance(lx)							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
		a	b	c	d	e	f	g	h


Luminance Limiting Curve

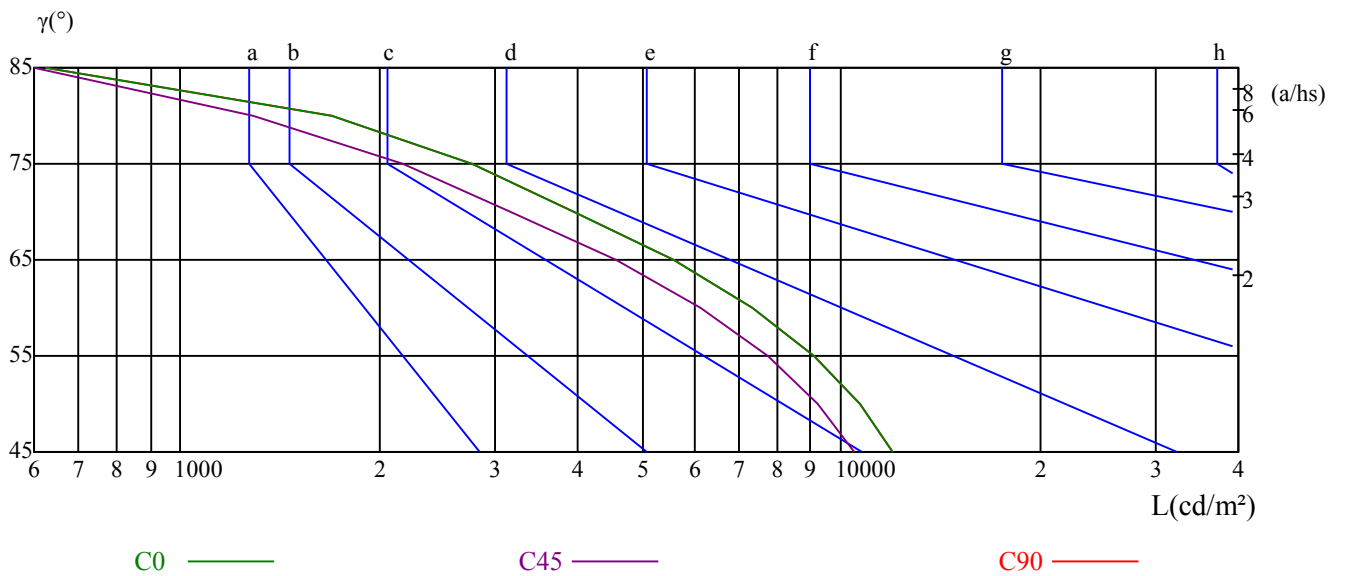

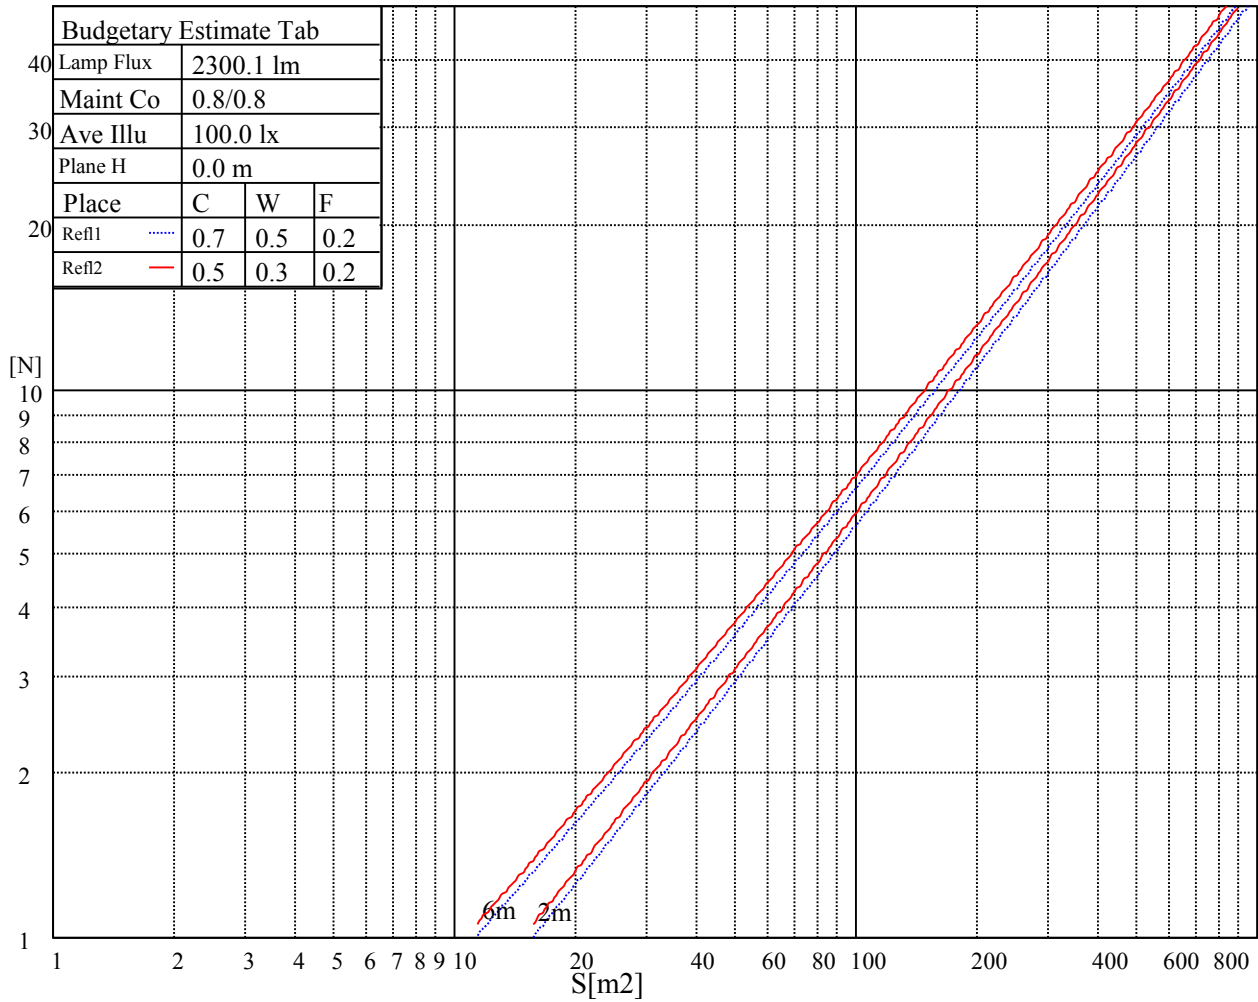

RHOCC	80			70			50			30			10			0
RHOW	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	COEFFICIENTS OF UTILIZATION RHOFC=20 CU															
0	1.09	1.09	1.09	1.07	1.07	1.07	1.02	1.02	1.02	0.98	0.98	0.98	0.94	0.94	0.94	0.92
1	1.03	1.01	1.00	1.01	1.00	0.98	0.98	0.96	0.95	0.94	0.93	0.92	0.91	0.90	0.90	0.88
2	0.98	0.95	0.93	0.97	0.94	0.92	0.94	0.92	0.90	0.91	0.90	0.88	0.89	0.87	0.86	0.85
3	0.94	0.90	0.88	0.93	0.90	0.87	0.90	0.88	0.86	0.88	0.86	0.84	0.86	0.85	0.83	0.82
4	0.90	0.86	0.83	0.89	0.86	0.83	0.87	0.84	0.82	0.86	0.83	0.81	0.84	0.82	0.80	0.79
5	0.87	0.83	0.80	0.86	0.82	0.80	0.84	0.81	0.79	0.83	0.80	0.78	0.82	0.80	0.78	0.77
6	0.84	0.80	0.77	0.83	0.80	0.77	0.82	0.79	0.76	0.81	0.78	0.76	0.80	0.77	0.75	0.74
7	0.81	0.77	0.75	0.81	0.77	0.74	0.80	0.76	0.74	0.79	0.76	0.74	0.78	0.75	0.73	0.72
8	0.79	0.75	0.72	0.78	0.75	0.72	0.77	0.74	0.72	0.77	0.74	0.72	0.76	0.73	0.71	0.70
9	0.77	0.73	0.70	0.76	0.73	0.70	0.75	0.72	0.70	0.75	0.72	0.70	0.74	0.71	0.69	0.69
10	0.74	0.71	0.68	0.74	0.71	0.68	0.74	0.70	0.68	0.73	0.70	0.68	0.72	0.70	0.68	0.67

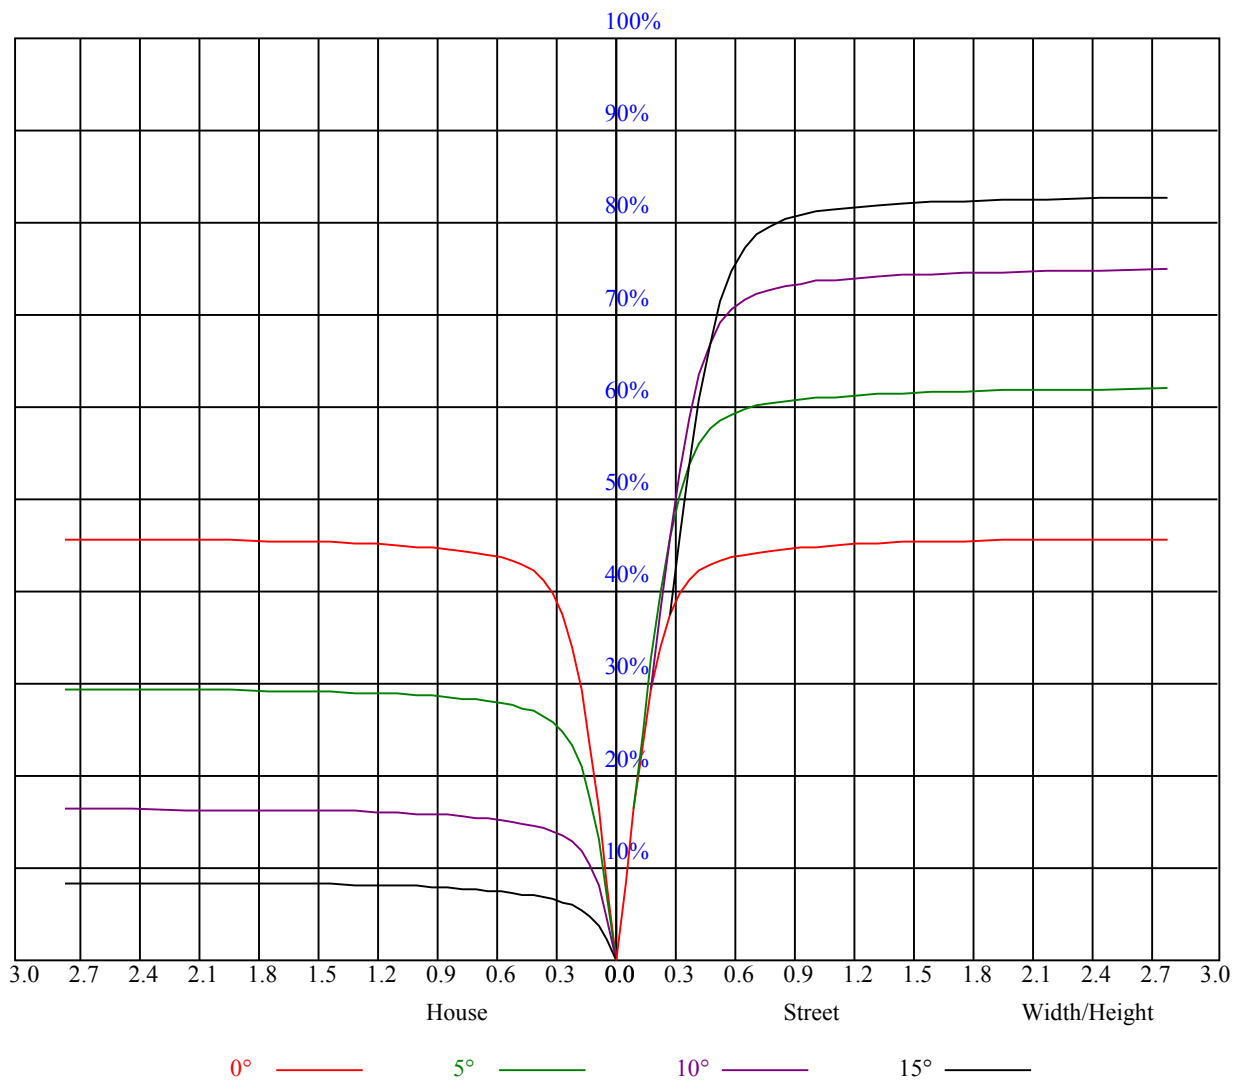

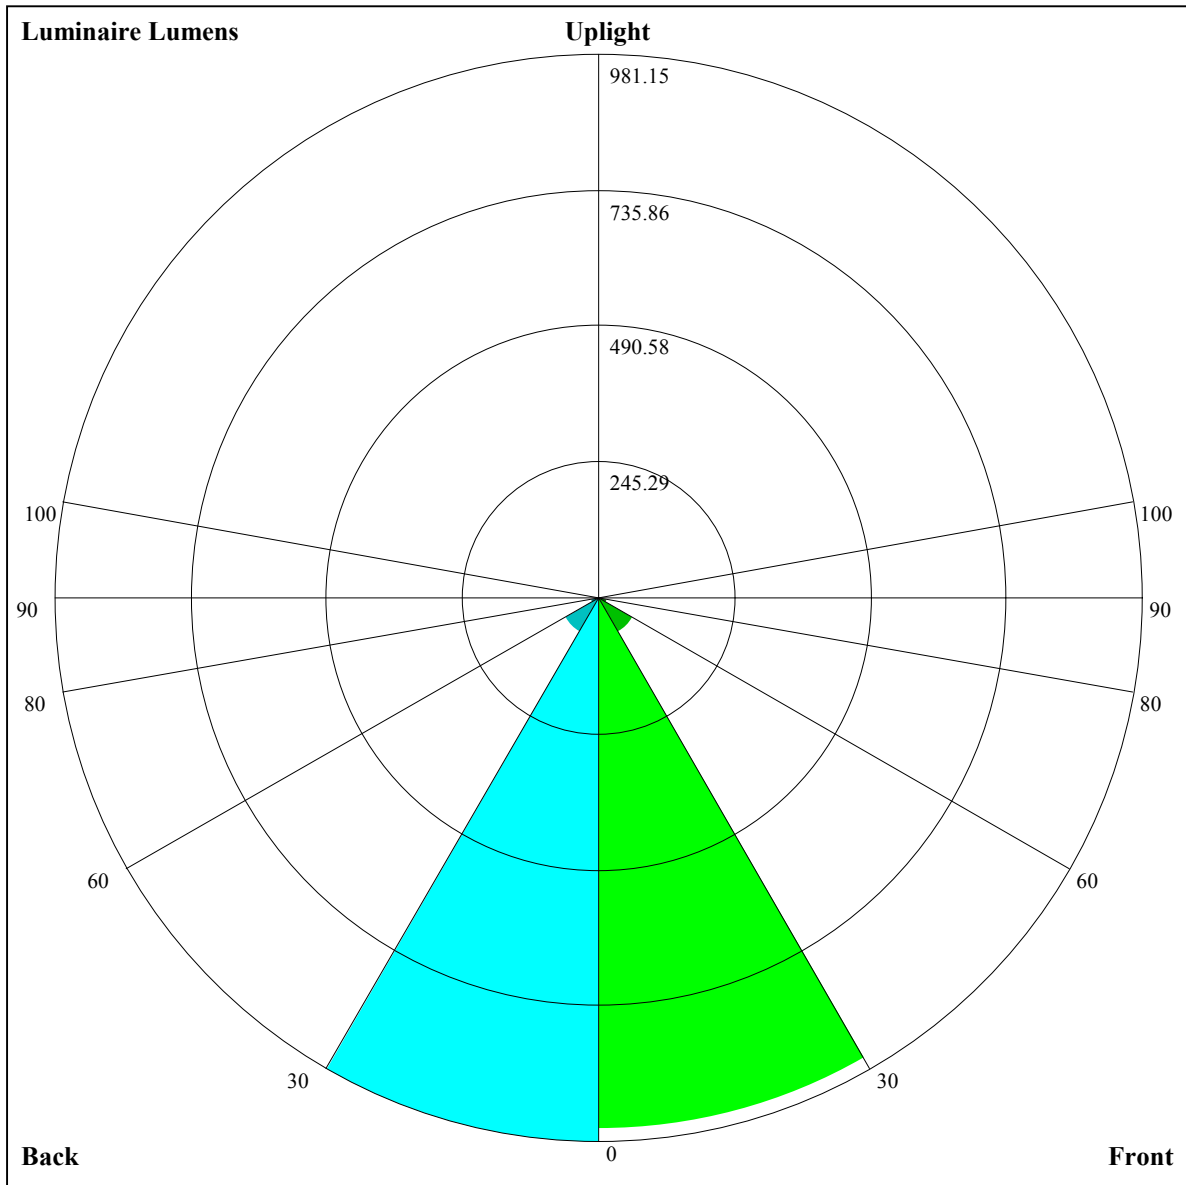

Luminaire Lumens:

FL=958.41,FM=69.46,FH=13.95,FVH=1.01

BL=981.15,BM=72.02,BH=14.21,BVH=1.05

UL=0,UH=0

BUG Rating:B2-U0-G0

Intensity data(cd)

C/γ(°)	0.0	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0
0.0	10172.16	10058.11	9864.14	9580.64	9226.79	8805.27	8331.52	7804.48	7222.02
45.0	10193.47	10156.70	10087.42	9820.44	9519.89	9305.66	8904.92	8441.83	7911.59
90.0	10118.33	9972.32	9734.11	9429.83	9041.34	8584.11	8068.80	7502.86	6890.02
135.0	10191.87	10123.66	9965.92	9727.72	9407.44	9031.75	8768.50	8069.33	7735.20
180.0	10172.16	10179.08	10143.38	9920.09	9668.03	9479.39	9107.42	8680.04	8187.10
225.0	10193.47	10116.73	9955.80	9726.65	9411.17	9057.33	8613.42	8102.90	7544.43
270.0	10118.33	10181.21	10146.58	10017.08	9862.54	9597.69	9180.96	8847.90	8374.68
315.0	10191.87	10147.64	10021.88	9809.78	9506.56	9157.51	8741.32	8253.18	7724.01
360.0	10172.16	10058.11	9864.14	9580.64	9226.79	8805.27	8331.52	7804.48	7222.02
C/γ(°)	9.0	10.0	11.0	12.0	13.0	14.0	15.0	16.0	17.0
0.0	6603.86	5960.11	5305.71	4652.91	4026.22	3435.77	2884.21	2389.15	2120.57
45.0	7326.47	6700.84	6062.96	5409.09	4752.56	4114.68	3518.90	2965.75	2472.28
90.0	6246.28	5586.55	4936.95	4296.93	3679.30	3107.50	2587.39	2126.43	1717.70
135.0	7139.95	6239.89	5853.53	5205.53	4555.92	3923.37	3335.05	2795.22	2310.28
180.0	7643.01	7037.10	6407.75	5760.81	5098.41	4450.94	3832.24	3243.39	2716.88
225.0	6957.70	6330.48	5688.33	5039.80	4402.98	3794.94	3230.07	2708.36	2240.47
270.0	7863.63	7283.84	6655.55	6012.34	5369.13	4726.98	4105.62	3517.83	2974.81
315.0	7138.89	6512.20	6121.05	5185.28	4549.53	4172.77	3346.77	3017.97	2504.26
360.0	6603.86	5960.11	5305.71	4652.91	4026.22	3435.77	2884.21	2389.15	2120.57
C/γ(°)	18.0	19.0	20.0	21.0	22.0	23.0	24.0	25.0	26.0
0.0	1713.43	994.44	994.44	825.04	657.01	527.62	428.82	355.07	298.53
45.0	2021.98	1632.43	1299.37	1025.46	813.37	706.25	515.47	419.55	372.12
90.0	1312.16	988.21	943.07	748.35	593.17	476.73	394.45	331.14	278.33
135.0	1863.71	1479.49	1169.34	924.21	729.17	580.49	474.97	392.37	326.83
180.0	2241.54	1818.95	1454.98	1157.09	921.01	732.36	589.55	477.64	409.96
225.0	1907.94	1316.96	1006.91	1006.91	814.06	667.56	547.18	449.98	378.57
270.0	2478.68	2037.97	1651.62	1332.94	1074.49	868.79	706.25	625.78	478.70
315.0	2057.15	1662.27	975.37	975.37	816.03	660.26	538.66	441.88	368.66
360.0	1713.43	994.44	994.44	825.04	657.01	527.62	428.82	355.07	298.53
C/γ(°)	27.0	28.0	29.0	30.0	31.0	32.0	33.0	34.0	35.0
0.0	253.87	217.74	187.53	162.64	140.63	130.29	109.35	97.36	90.81
45.0	314.04	274.07	274.07	190.25	165.41	143.30	125.87	112.44	98.69
90.0	240.60	208.36	179.75	156.67	137.75	121.02	108.87	94.59	86.70
135.0	287.93	279.40	238.21	186.52	164.29	143.83	126.35	112.12	99.60
180.0	345.48	280.47	280.47	239.17	183.64	161.74	141.33	123.42	109.40
225.0	320.81	273.22	235.28	203.51	175.43	153.21	133.65	117.82	109.94
270.0	400.37	361.47	307.11	278.33	278.33	192.16	166.05	144.42	125.98
315.0	311.80	266.02	242.63	197.07	180.76	156.73	136.69	119.64	105.46
360.0	253.87	217.74	187.53	162.64	140.63	130.29	109.35	97.36	90.81
C/γ(°)	36.0	37.0	38.0	39.0	40.0	41.0	42.0	43.0	44.0
0.0	81.96	74.39	68.16	63.04	58.99	55.74	53.08	51.00	49.19
45.0	89.15	79.99	75.51	67.09	62.46	59.90	55.16	53.29	50.84
90.0	78.34	70.34	65.71	60.96	57.13	53.93	51.42	49.45	47.80
135.0	89.21	80.25	72.95	67.25	62.35	58.57	55.42	52.81	50.73
180.0	96.83	86.22	78.50	71.25	65.49	60.91	56.81	55.37	52.54
225.0	98.00	87.24	79.35	72.74	67.73	63.26	59.74	56.86	54.57
270.0	110.42	97.84	87.77	79.08	73.38	66.56	62.94	59.26	55.79
315.0	93.26	83.35	75.30	68.69	63.47	59.31	55.85	53.34	51.32
360.0	81.96	74.39	68.16	63.04	58.99	55.74	53.08	51.00	49.19

Intensity data(cd)

C/γ(°)	45.0	46.0	47.0	48.0	49.0	50.0	51.0	52.0	53.0
0.0	47.64	46.47	45.30	44.18	43.01	41.67	40.23	38.74	37.89
45.0	48.76	47.06	45.51	44.12	42.42	41.09	39.49	38.16	36.61
90.0	46.36	45.08	43.91	42.90	41.67	40.55	39.06	37.73	36.18
135.0	49.67	47.80	47.00	45.83	44.66	43.38	42.15	40.71	39.11
180.0	49.77	48.87	47.16	45.99	44.44	43.22	41.73	40.34	38.80
225.0	52.65	50.79	49.45	47.80	46.36	44.92	43.32	41.78	40.07
270.0	53.88	52.17	50.68	49.08	47.75	46.42	44.92	43.43	41.83
315.0	49.61	48.23	46.95	45.78	44.60	43.80	41.94	41.14	39.65
360.0	47.64	46.47	45.30	44.18	43.01	41.67	40.23	38.74	37.89
C/γ(°)	54.0	55.0	56.0	57.0	58.0	59.0	60.0	61.0	62.0
0.0	35.70	34.11	33.09	31.39	29.68	28.03	26.49	24.83	23.18
45.0	34.90	33.36	31.76	30.11	28.51	27.66	25.53	24.09	23.23
90.0	34.59	32.83	31.12	30.11	28.40	26.75	25.15	23.50	21.90
135.0	37.52	35.81	34.11	32.40	30.64	28.88	27.18	25.53	23.82
180.0	37.25	35.65	33.95	32.51	31.01	29.36	27.71	26.33	24.83
225.0	38.37	36.66	35.22	33.41	31.23	29.74	27.92	26.11	24.30
270.0	40.18	38.58	36.82	35.06	33.31	31.44	29.63	27.87	26.06
315.0	38.00	36.40	34.85	33.09	31.39	29.58	27.98	26.27	24.57
360.0	35.70	34.11	33.09	31.39	29.68	28.03	26.49	24.83	23.18
C/γ(°)	63.0	64.0	65.0	66.0	67.0	68.0	69.0	70.0	71.0
0.0	21.64	20.09	18.65	17.21	15.83	14.49	13.16	11.72	10.82
45.0	21.26	20.41	19.02	17.80	16.47	15.29	14.18	12.95	11.67
90.0	20.41	18.92	17.48	16.09	14.76	13.43	11.99	10.87	10.07
135.0	22.22	20.57	18.97	17.80	16.15	14.97	13.64	12.26	11.08
180.0	23.39	21.96	20.78	19.13	18.07	16.73	15.35	14.02	12.68
225.0	22.65	21.00	19.45	17.96	16.52	15.19	13.86	12.52	11.30
270.0	24.35	23.34	21.10	19.56	18.70	17.21	15.83	14.55	13.32
315.0	22.91	21.32	19.82	18.23	16.79	15.67	14.12	12.84	11.72
360.0	21.64	20.09	18.65	17.21	15.83	14.49	13.16	11.72	10.82
C/γ(°)	72.0	73.0	74.0	75.0	76.0	77.0	78.0	79.0	80.0
0.0	9.97	9.17	8.37	7.51	6.77	6.18	5.44	4.53	3.94
45.0	10.76	9.97	9.11	8.26	7.51	6.71	5.92	5.17	4.48
90.0	9.27	8.47	7.73	6.98	6.18	5.49	5.06	4.05	3.62
135.0	10.23	9.43	8.63	7.94	7.14	6.39	5.60	4.96	4.26
180.0	11.40	10.50	9.65	8.90	8.05	7.30	6.50	5.76	5.06
225.0	10.39	9.54	8.79	8.31	7.25	6.45	6.02	5.01	4.58
270.0	11.94	10.87	10.13	9.33	8.53	7.78	7.03	6.29	5.54
315.0	10.60	9.97	9.22	8.47	7.62	6.87	6.18	5.49	4.85
360.0	9.97	9.17	8.37	7.51	6.77	6.18	5.44	4.53	3.94
C/γ(°)	81.0	82.0	83.0	84.0	85.0	86.0	87.0	88.0	89.0
0.0	3.20	2.61	2.13	1.60	1.07	0.75	0.59	0.48	0.48
45.0	3.73	3.09	2.50	1.81	1.23	0.85	0.64	0.53	0.48
90.0	2.77	2.34	1.81	1.44	1.07	0.69	0.69	0.59	0.48
135.0	3.57	2.98	2.50	1.87	1.44	0.96	0.75	0.69	0.59
180.0	4.37	3.68	2.98	2.50	1.71	1.23	0.85	0.64	0.53
225.0	3.62	3.04	2.50	1.97	1.44	0.91	0.64	0.48	0.43
270.0	4.85	4.21	3.36	2.77	2.18	1.65	1.17	0.64	0.53
315.0	4.16	3.46	2.98	2.34	1.76	1.33	0.80	0.59	0.59
360.0	3.20	2.61	2.13	1.60	1.07	0.75	0.59	0.48	0.48

Intensity data(cd)

<b>C/γ(°)</b>	<b>90.0</b>
<b>0.0</b>	<b>0.43</b>
<b>45.0</b>	<b>0.37</b>
<b>90.0</b>	<b>0.37</b>
<b>135.0</b>	<b>0.43</b>
<b>180.0</b>	<b>0.53</b>
<b>225.0</b>	<b>0.43</b>
<b>270.0</b>	<b>0.53</b>
<b>315.0</b>	<b>0.59</b>
<b>360.0</b>	<b>0.43</b>