
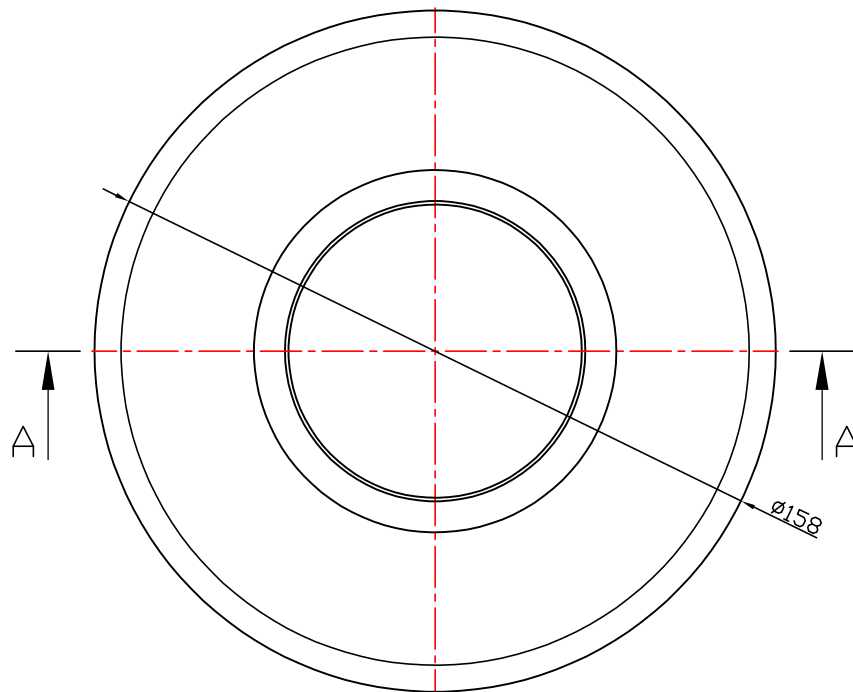


table for unmentioned tolerance in the drawing (unit: mm)			punch angle tolerance in the drawing (unit:degree)		
0-5	5-30	30-120	0-10	10-50	50-120
±0.15	±0.2	±0.5	±1°	±0.5°	±0.3°
120-250	250-400	400-700	120-250	250-360	360 above
±0.8	±1.5	±2	±0.2°	±0.166°	±0.083°

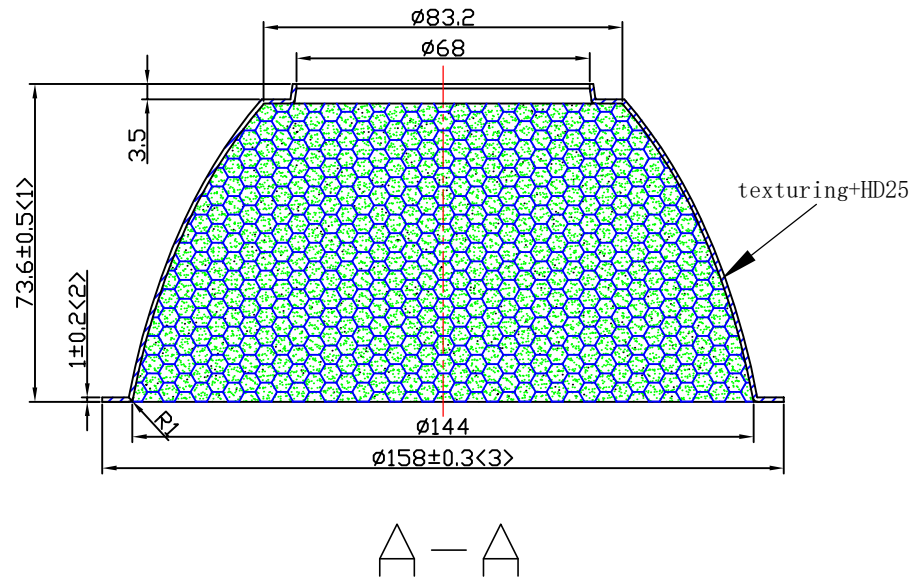

Light Source	PHILIPS DLM Flex LES64
PlasticHolder	
Metal Adaptar	
Design Angle	65° ±5°
Measured Angle	49.8°
Efficiency	

						Material:T=1.0 1090AL				Efficiency		
										Nata® NATA Lighting Co.,Ltd		
Mark	Amended Times	Amended Content			Signature	Amended Date					Customer Item	
Controll Version	AO	Design Version	K0	Client Version							Customer Code	NT
Designer		Drawing by		Proportion	1:1						Product Number	
Technology		Auditor		View							Product Name	6495-EG
Approval		Date	2018.07.11	Page	Total Page_							