



NATA LIGHTING CO.,LTD
www.nata.cn
Email:info@nata.cn
Tel:+86 0750-377 0000(10 lines) Fax:+86 0750-377 1111
Address:380JinOu Road,Gaoxin Zone,Jiang Men City,Guangdong,China

Nata

Client: NT

LumCAT: 2-3058-LM

Luminaire: 92.70.121.00 LED HOLDER

Report No: 20251226-B005

Ballast type: DC

Test No: 20251226-C005

Voltage(V): 34.430

LampCAT: PHILIPS SLM 1208 L15 1919 G8N

Current(A): 0.576

Lamp flux(lm): 3373.1

Power (W): 19.790

Number of Lamps: 1

PF: 0.000

Length(mm): 69

Width(mm): 69

Phm Type: C

Height(mm): 35

Photometric Results

Lumens(lm): 3299.11, Efficiency(%): 97.81% , Luminous Efficacy(lm/W): 166.71

Central intensity(cd): 9337.688, Maximum intensity(cd): 9337.688

Angle of maximum intensity: C=0.0 γ =0.0

Beam Angle(50%Imax): [C0/180]Total=27.4

[C90/270]Total=27.4

Field angle(10%Imax): [C0/180]Total=69.2

[C90/270]Total=69.2

Maximum s/h(1/2): C0_180=0.46 C90_270=0.46

Maximum s/h(1/4): C0_180=0.48 C90_270=0.48

Up flux rate of lamp(%): 0.00%


Down flux rate of lamp(%): 97.81%


Up flux rate of LUM(%): - -


Down flux rate of LUM(%): 100.00%

CIE Type : Direct lighting

Output flux ratio in π solid angle : 99.065%

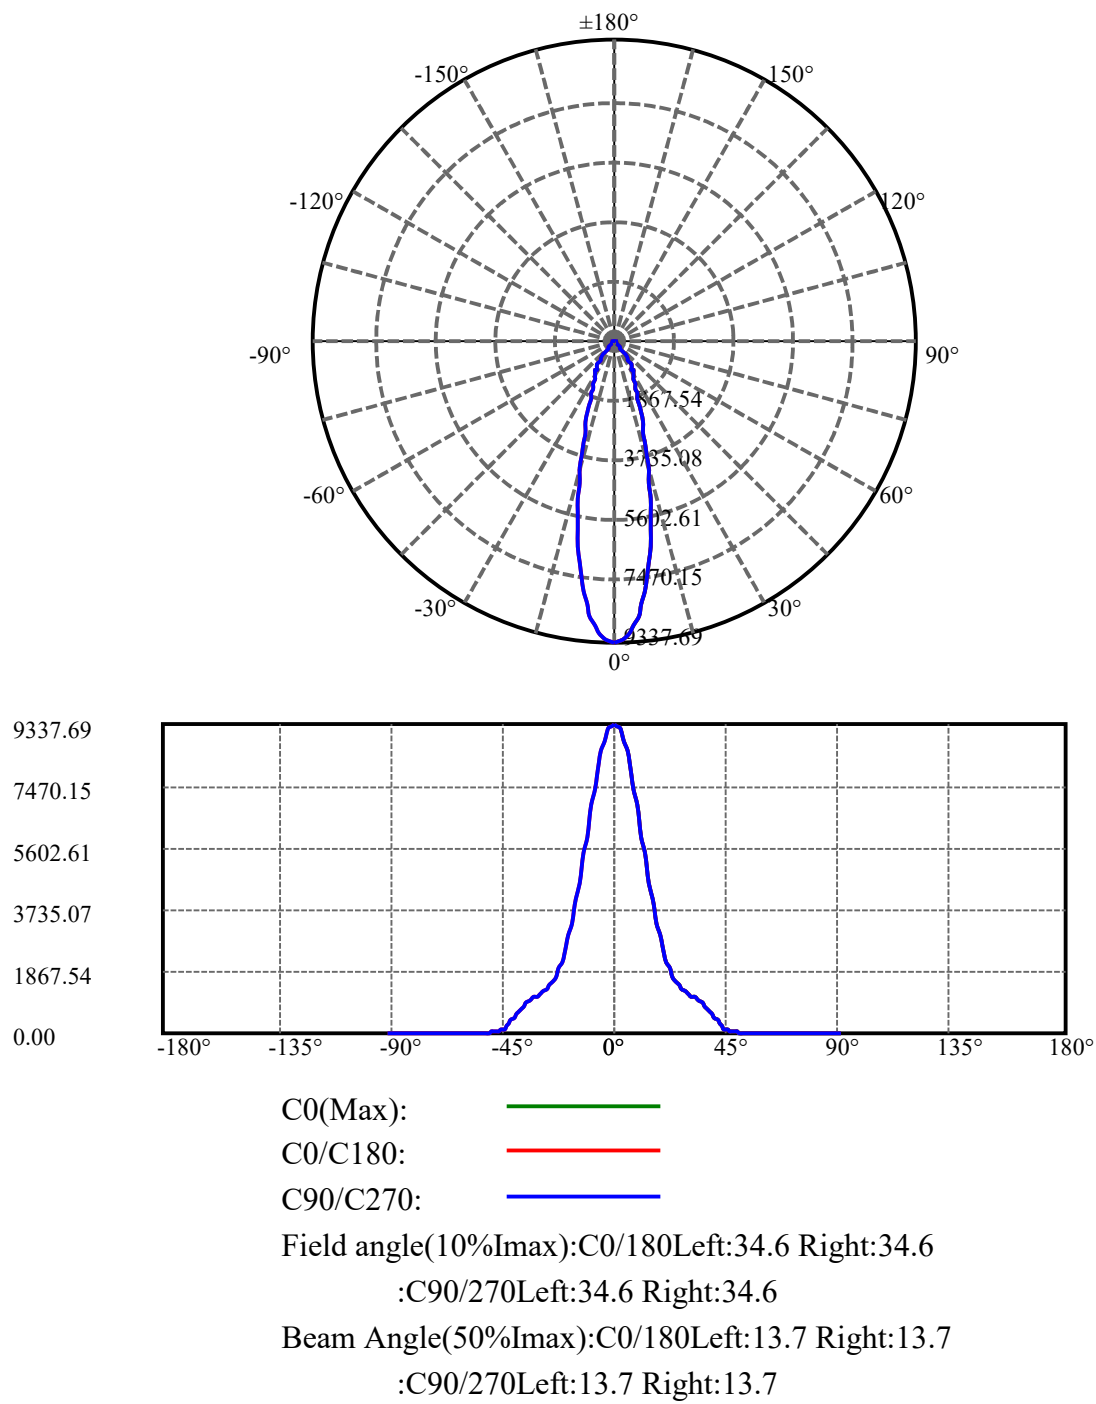

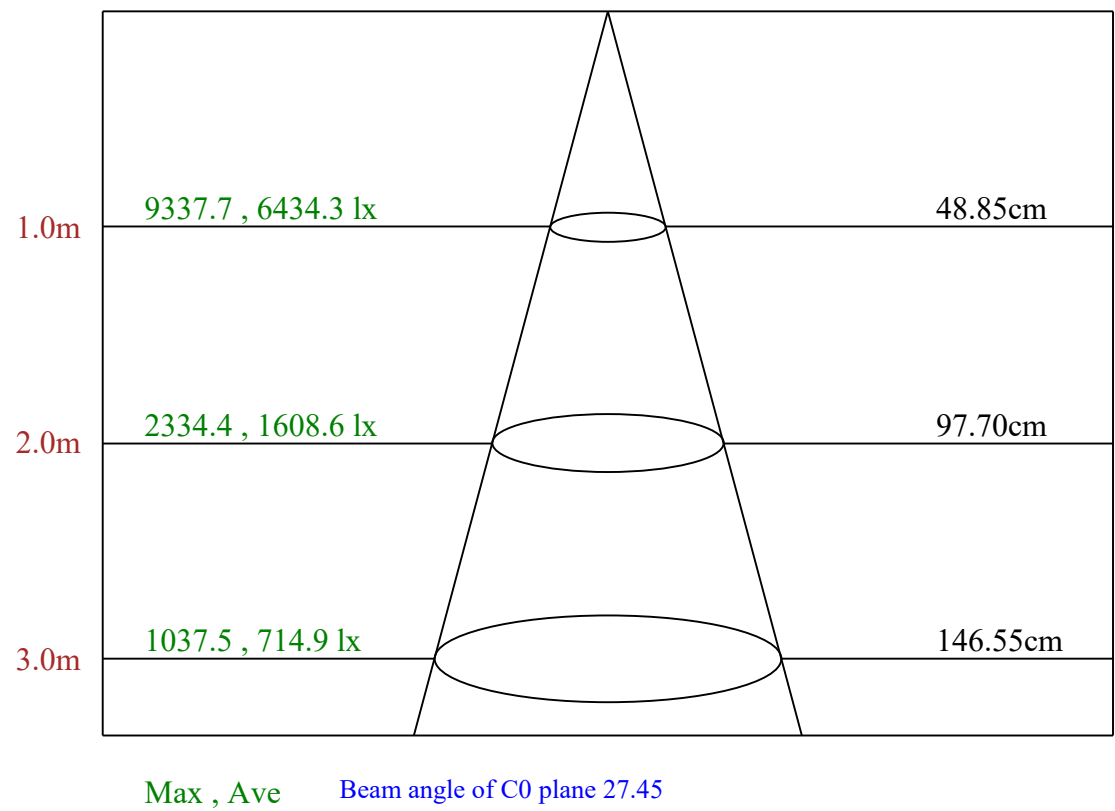

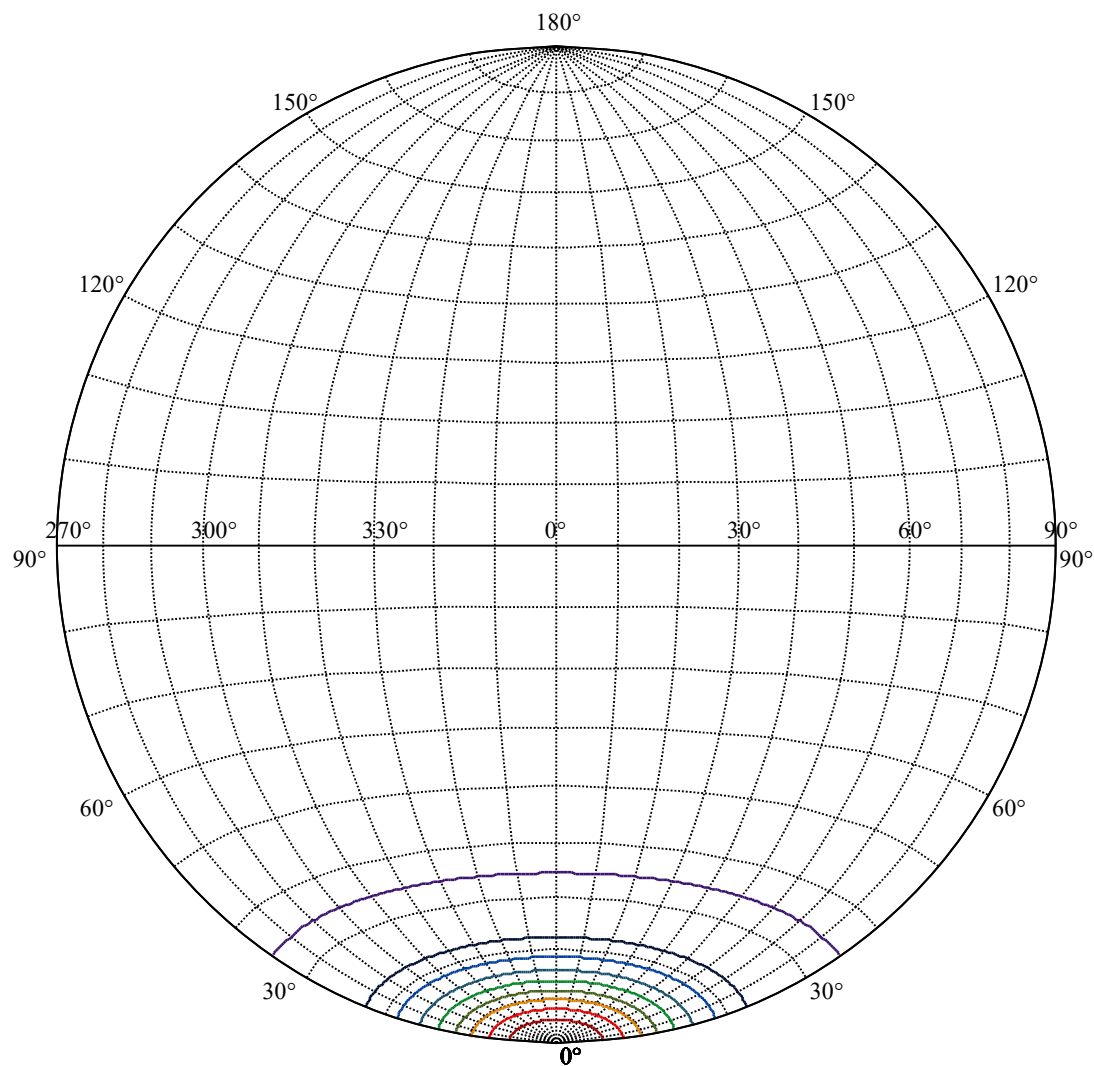


House


[Unit:cd]

Road

Imax:9337.69	
(10%Imax) 933.769	—
(20%Imax) 1867.54	—
(30%Imax) 2801.31	—
(40%Imax) 3735.07	—
(50%Imax) 4668.84	—
(60%Imax) 5602.61	—
(70%Imax) 6536.38	—
(80%Imax) 7470.15	—
(90%Imax) 8403.92	—

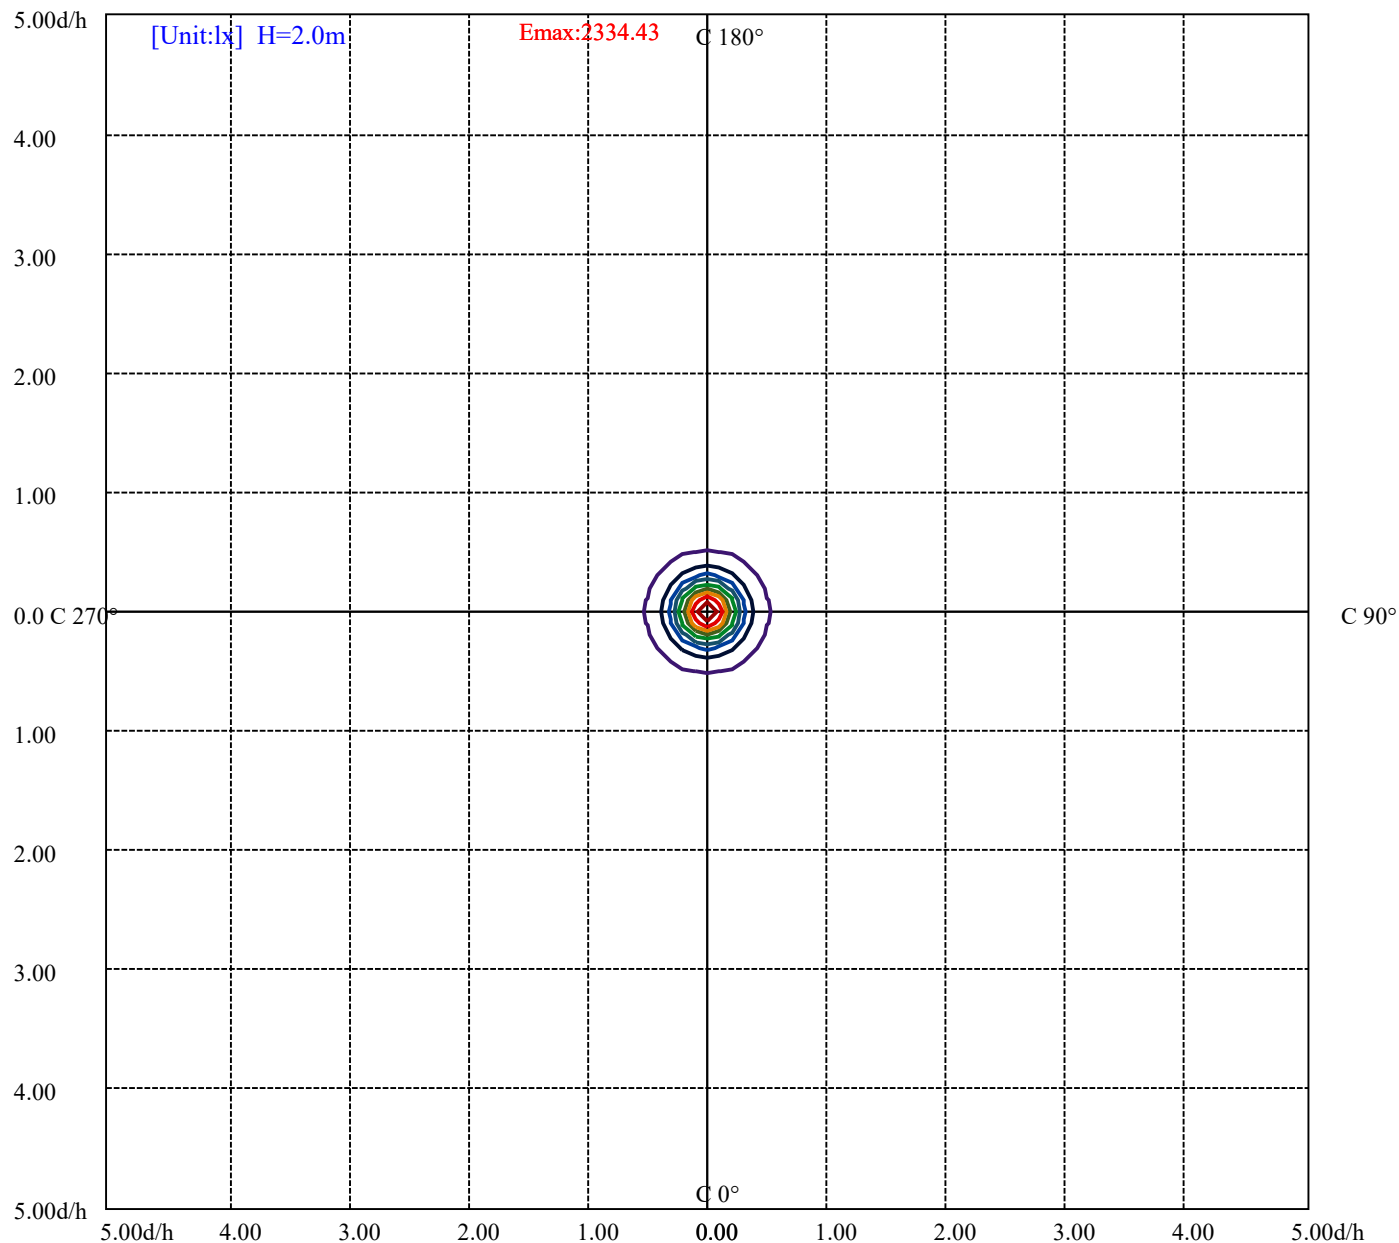

(10%Emax)	233.442	
(20%Emax)	466.885	
(30%Emax)	700.325	
(40%Emax)	933.7675	
(50%Emax)	1167.21	
(60%Emax)	1400.652	
(70%Emax)	1634.095	
(80%Emax)	1867.537	
(90%Emax)	2100.978	

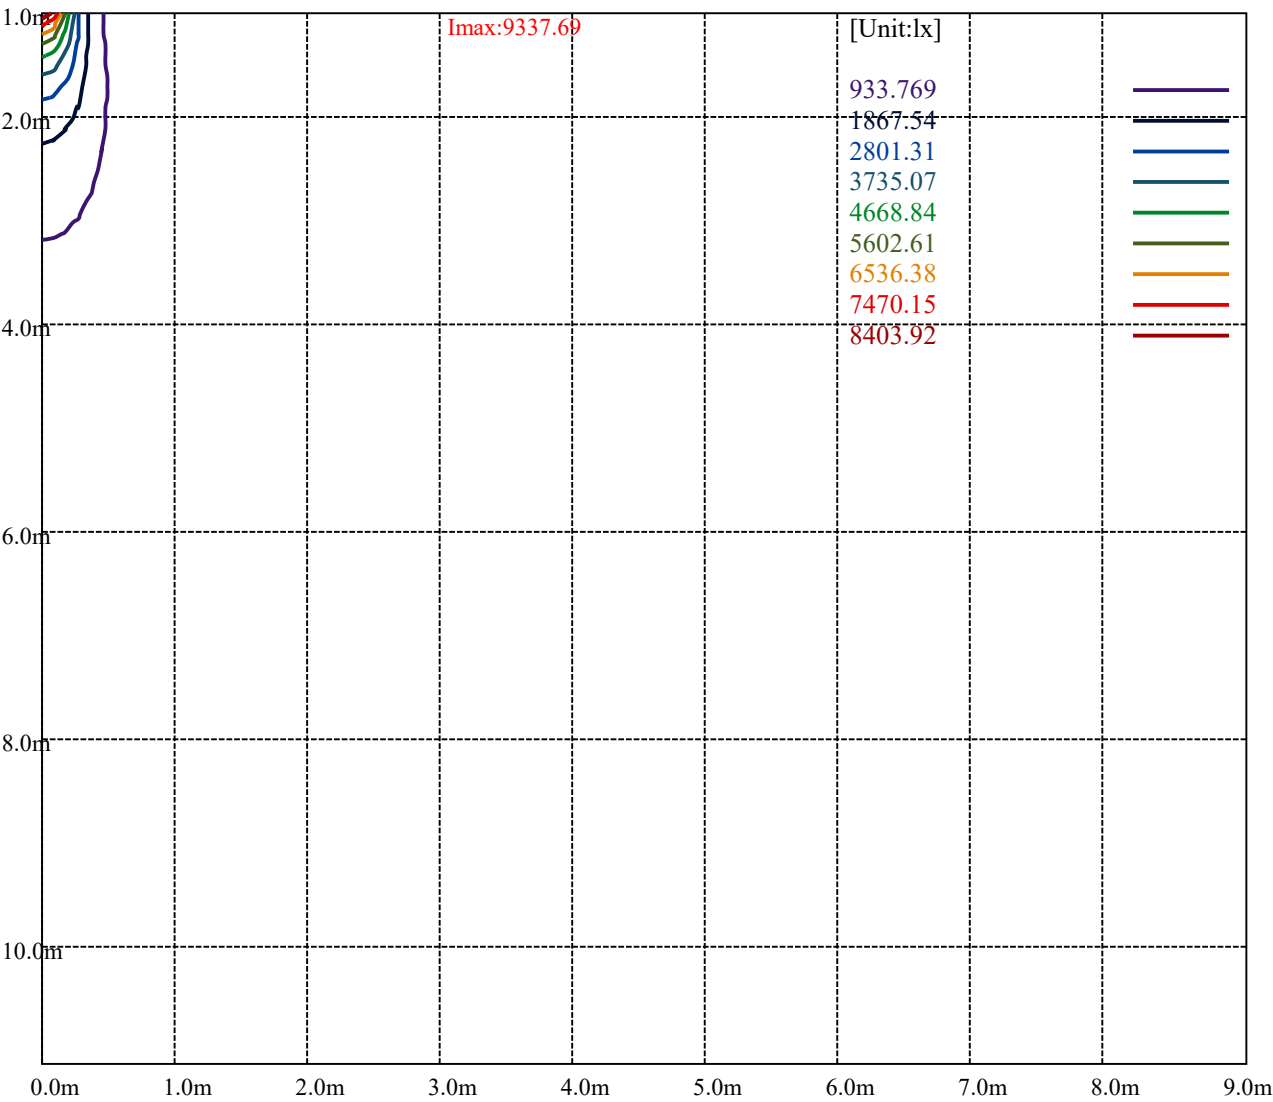

Luminance Table


γ	45	50	55	60	65	70	75	80	85
C0	17937	5347	4016	3421	3083	2759	2558	2559	2690
C45	15743	4625	3421	2866	2536	2223	2012	1958	1988
C90	17937	5347	4016	3421	3083	2759	2558	2559	2690

L(Hor)(65)	L(Ver)(65)	L45(65)	L(Hor)(75)	L(Ver)(75)	L45(75)	L(Hor)(85)	L(Ver)(85)	L45(85)
6436	6436	6436	7399	7399	7399	18289	18289	18289

Glare Table


Glare	Quality	Service Values Illuminance(lx)							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
		a	b	c	d	e	f	g	h

Luminance Limiting Curve

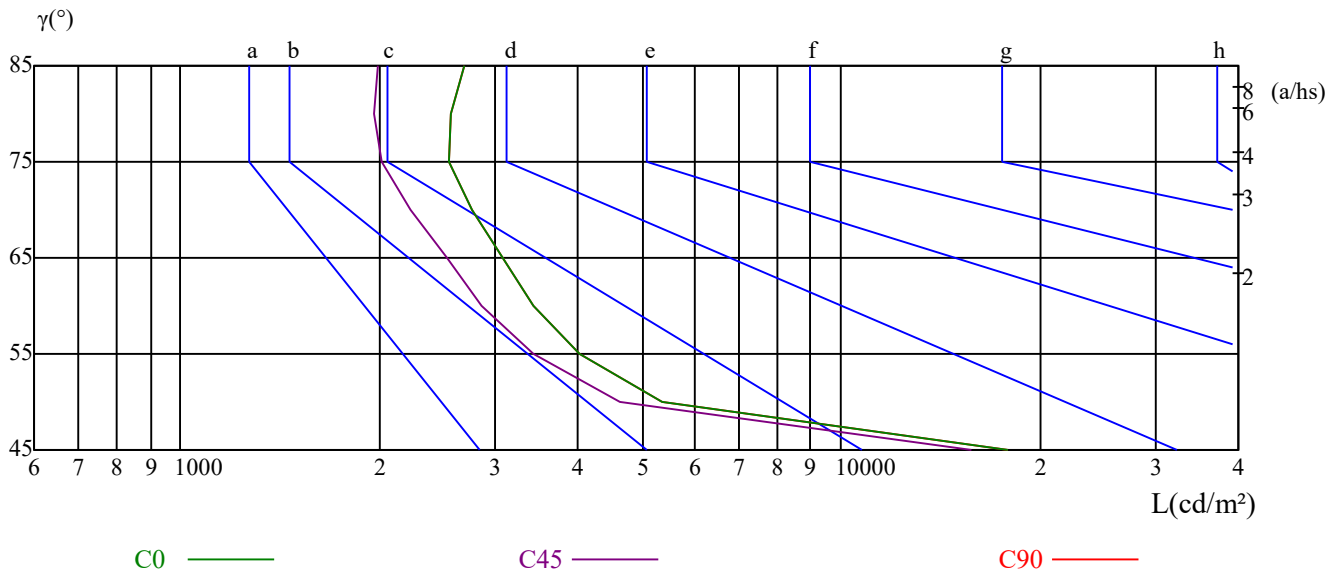


Illumination assessment according UGR											
Rf of Ceiling		70	70	50	50	30	70	70	50	50	30
Rf of Wall		50	30	50	30	30	50	30	50	30	30
Rf of Floor		20	20	20	20	20	20	20	20	20	20
Room dimensions		Viewed crosswise					Viewed endwise				
X	Y										
2H	2H	20.40	21.35	20.77	21.66	21.98	20.13	21.08	20.49	21.39	21.70
	3H	20.22	21.06	20.60	21.40	21.74	19.95	20.79	20.34	21.13	21.48
	4H	20.13	20.91	20.53	21.26	21.63	19.87	20.65	20.27	21.00	21.37
	6H	20.06	20.77	20.48	21.15	21.55	19.81	20.52	20.23	20.90	21.29
	8H	20.00	20.68	20.42	21.07	21.47	19.75	20.43	20.17	20.82	21.22
	12H	19.95	20.59	20.38	20.99	21.41	19.71	20.35	20.13	20.74	21.16
4H	2H	20.09	20.87	20.50	21.23	21.60	19.82	20.60	20.22	20.95	21.32
	3H	19.88	20.53	20.31	20.93	21.35	19.62	20.27	20.05	20.67	21.08
	4H	19.83	20.39	20.27	20.82	21.27	19.58	20.14	20.02	20.56	21.01
	6H	19.73	20.23	20.21	20.68	21.13	19.49	19.98	19.96	20.44	20.89
	8H	19.70	20.16	20.19	20.62	21.09	19.46	19.92	19.95	20.38	20.86
	12H	19.69	20.11	20.18	20.56	21.08	19.46	19.88	19.95	20.33	20.85
8H	4H	19.64	20.10	20.13	20.56	21.04	19.39	19.85	19.88	20.31	20.78
	6H	19.55	19.92	20.06	20.40	20.92	19.31	19.68	19.81	20.16	20.67
	8H	19.58	19.89	20.11	20.42	20.91	19.35	19.66	19.88	20.18	20.68
	12H	19.59	19.83	20.13	20.34	20.87	19.37	19.61	19.91	20.12	20.65
12H	4H	19.59	20.02	20.09	20.47	20.99	19.34	19.76	19.83	20.22	20.74
	6H	19.54	19.85	20.08	20.38	20.88	19.30	19.61	19.83	20.14	20.63
	8H	19.54	19.78	20.09	20.30	20.82	19.31	19.55	19.86	20.07	20.59
Variation with the observer position at spacings:											
S = 1.0H		4.5/-10.8					4.5/-10.8				
S = 1.5H		7.2/-9.7					7.2/-9.7				
S = 2.0H		9.1/-8.8					9.1/-8.8				
Standard tables:		BK0					BK0				
Uncorrected UGR		0.5					0.5				

UGR calculation is based on CIE Publ. 117 ,S/H = 0.25

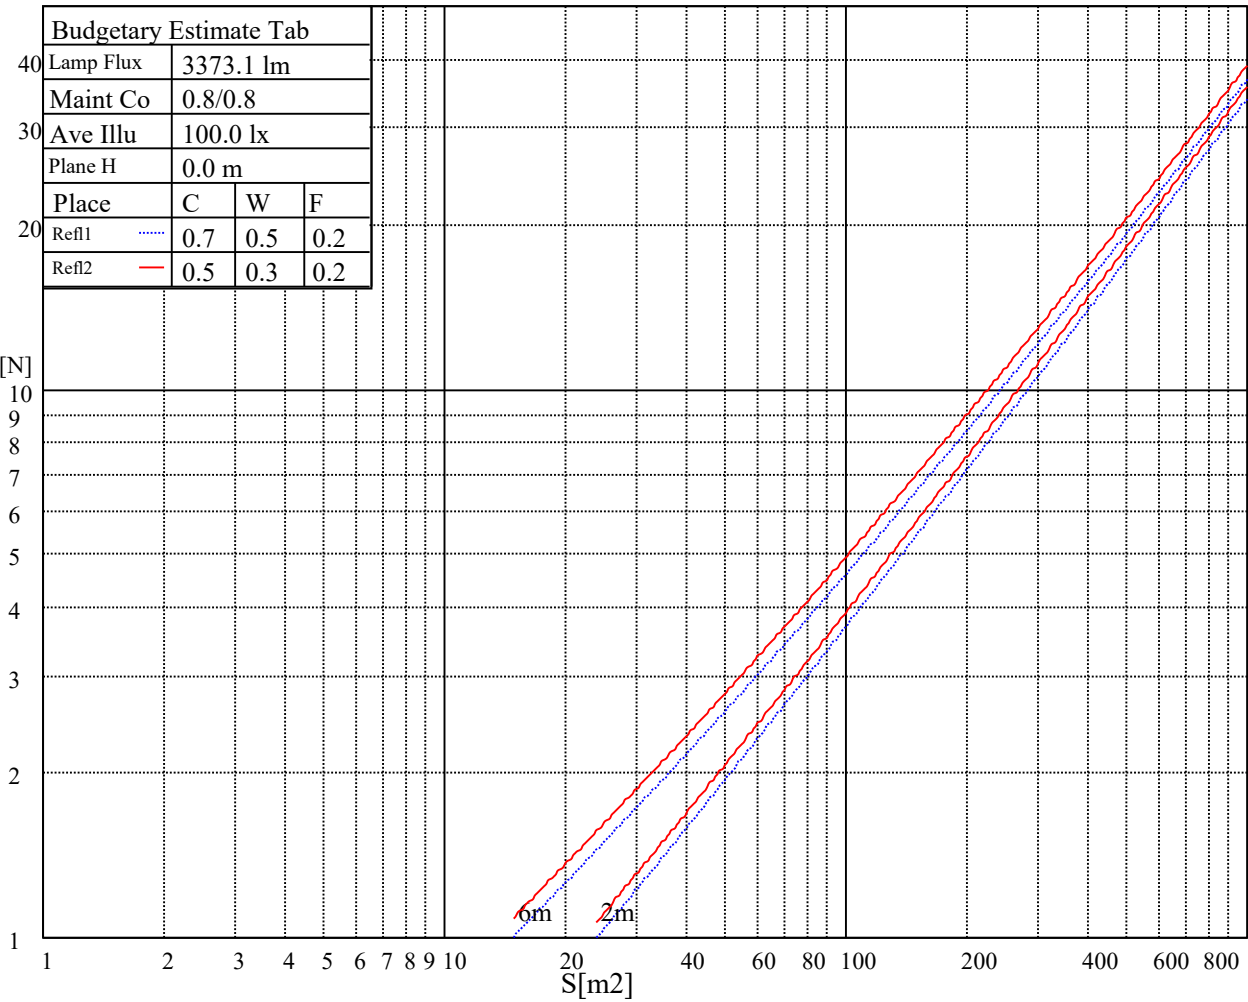

RHOCC	80			70			50			30			10			0
RHOW	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	COEFFCIENTS OF UTILIZATION RHOFC=20 CU															
0	1.16	1.16	1.16	1.14	1.14	1.14	1.09	1.09	1.09	1.04	1.04	1.04	1.00	1.00	1.00	0.98
1	1.09	1.07	1.05	1.07	1.05	1.03	1.03	1.01	1.00	0.99	0.98	0.97	0.96	0.95	0.94	0.93
2	1.02	0.99	0.96	1.01	0.98	0.95	0.98	0.95	0.93	0.95	0.93	0.91	0.92	0.90	0.89	0.87
3	0.97	0.92	0.89	0.95	0.91	0.88	0.93	0.90	0.87	0.91	0.88	0.85	0.88	0.86	0.84	0.83
4	0.91	0.87	0.83	0.90	0.86	0.83	0.88	0.85	0.82	0.86	0.83	0.81	0.85	0.82	0.80	0.78
5	0.87	0.82	0.78	0.86	0.81	0.78	0.84	0.80	0.77	0.83	0.79	0.76	0.81	0.78	0.76	0.74
6	0.83	0.77	0.74	0.82	0.77	0.74	0.80	0.76	0.73	0.79	0.75	0.73	0.78	0.75	0.72	0.71
7	0.79	0.74	0.70	0.78	0.73	0.70	0.77	0.73	0.69	0.76	0.72	0.69	0.75	0.71	0.69	0.68
8	0.75	0.70	0.67	0.75	0.70	0.67	0.74	0.69	0.66	0.73	0.69	0.66	0.72	0.68	0.66	0.65
9	0.72	0.67	0.64	0.72	0.67	0.64	0.71	0.66	0.63	0.70	0.66	0.63	0.69	0.66	0.63	0.62
10	0.69	0.64	0.61	0.69	0.64	0.61	0.68	0.64	0.61	0.67	0.63	0.61	0.67	0.63	0.60	0.59

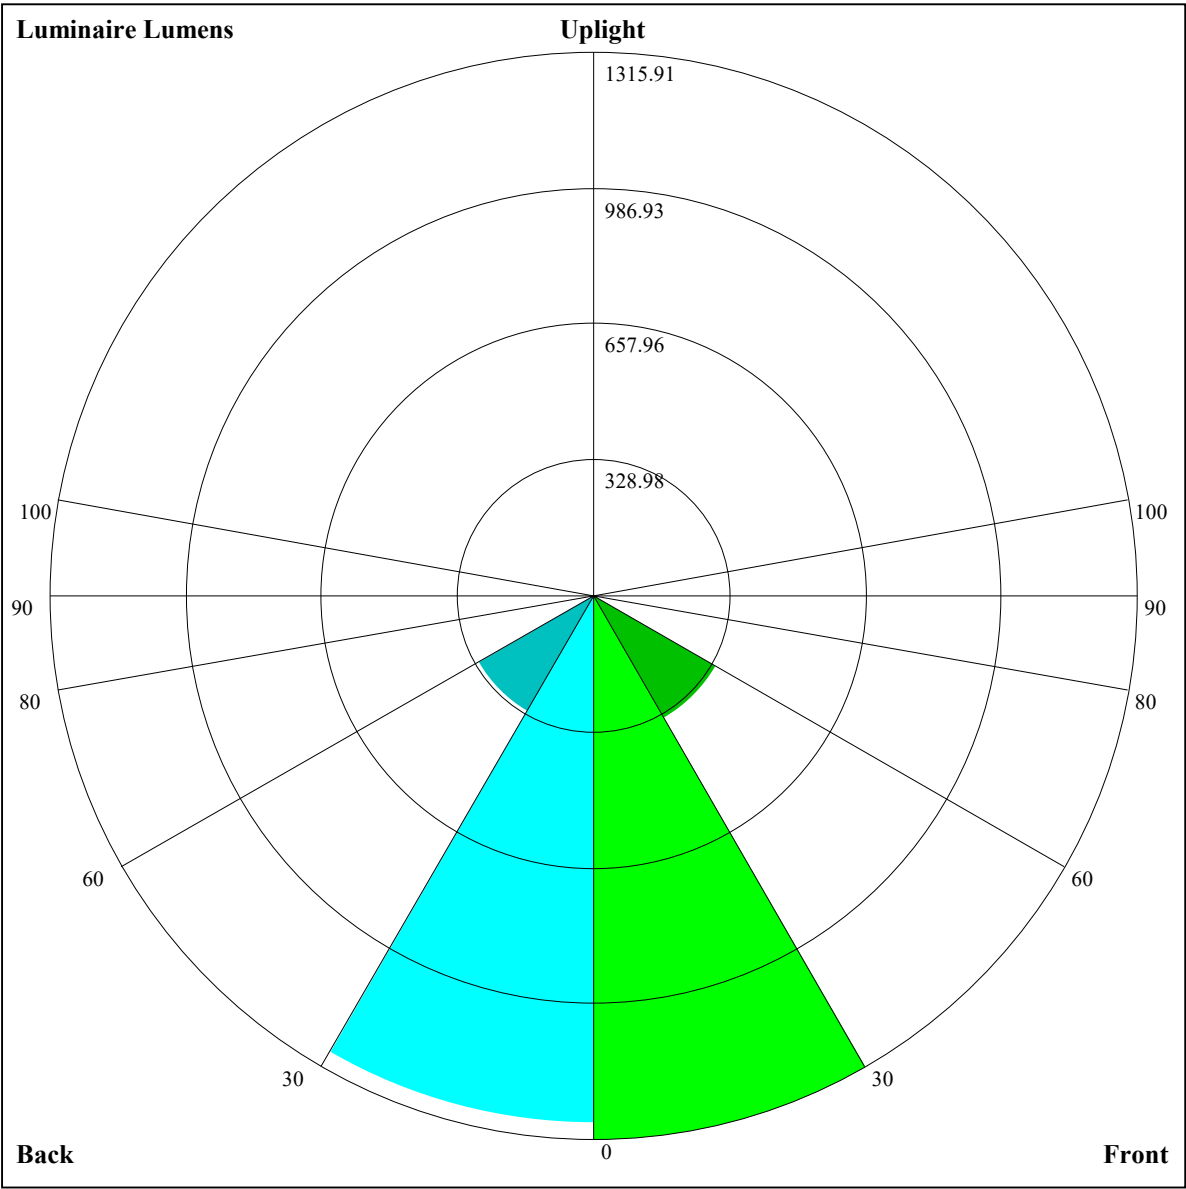

Luminaire Lumens:

FL=1315.91,FM=339.46,FH=11.5,FVH=4.15

BL=1275.61,BM=324.37,BH=11.41,BVH=4.13

UL=0,UH=0

BUG Rating:B3-U0-G0

Intensity data(cd)

Appendix Page: 12 Total:14

C/ γ (°)	0.0	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0
0.0	9394.74	9393.02	9332.74	9220.78	9034.77	8723.88	8418.16	8072.82	7579.37
45.0	9272.45	9364.60	9402.49	9357.71	9259.54	9039.93	8812.58	8459.50	8121.05
90.0	9370.63	9380.96	9310.35	9151.89	8972.76	8740.24	8357.02	7991.87	7609.51
135.0	9312.93	9366.32	9363.74	9270.73	9127.78	8927.12	8672.21	8306.21	7958.29
180.0	9394.74	9325.85	9201.84	9021.85	8723.88	8428.49	8087.47	7594.01	7167.72
225.0	9272.45	9127.78	8878.03	8619.68	8302.76	7944.51	7438.13	7001.51	6547.67
270.0	9370.63	9298.29	9176.00	8956.40	8727.32	8437.97	8100.38	7610.37	7181.50
315.0	9312.93	9208.73	9004.63	8783.30	8517.20	8099.52	7718.02	7303.79	6742.30
360.0	9394.74	9393.02	9332.74	9220.78	9034.77	8723.88	8418.16	8072.82	7579.37
C/ γ (°)	9.0	10.0	11.0	12.0	13.0	14.0	15.0	16.0	17.0
0.0	7148.77	6583.84	6119.66	5664.09	5210.25	4664.26	4255.20	3855.61	3485.30
45.0	7733.52	7304.65	6743.16	6289.31	5830.30	5371.29	4818.41	4391.26	3981.34
90.0	7178.05	6718.18	6155.83	5683.04	5224.89	4678.04	4257.78	3856.47	3395.73
135.0	7470.86	7049.74	6604.51	6044.74	5590.89	5143.94	4602.25	4188.02	3795.32
180.0	6725.93	6156.69	5702.85	5144.80	4710.76	4293.95	3896.08	3442.24	3111.54
225.0	6081.77	5520.28	5077.63	4540.25	4131.19	3759.15	3326.84	3008.20	2713.68
270.0	6741.43	6291.90	5723.51	5267.95	4819.27	4287.92	3889.19	3518.88	3086.57
315.0	6285.87	5833.75	5276.56	4839.94	4413.65	4013.20	3547.30	3204.55	2885.05
360.0	7148.77	6583.84	6119.66	5664.09	5210.25	4664.26	4255.20	3855.61	3485.30
C/ γ (°)	18.0	19.0	20.0	21.0	22.0	23.0	24.0	25.0	26.0
0.0	3074.51	2784.29	2528.52	2302.89	2054.01	1699.55	1699.55	1581.13	1482.01
45.0	3595.53	3168.38	2866.97	2532.83	2296.00	2103.96	1892.97	1747.43	1628.59
90.0	3063.32	2760.18	2431.21	2203.86	1872.30	1683.70	1650.89	1533.42	1435.51
135.0	3425.01	3090.88	2724.87	2466.52	2245.19	2050.57	1848.19	1718.15	1573.47
180.0	2810.99	2546.61	2251.22	2047.98	1874.88	1695.76	1578.64	1478.74	1373.67
225.0	2456.18	2178.88	1717.55	1717.55	1685.51	1545.22	1451.10	1369.28	1300.82
270.0	2769.65	2494.94	2202.99	2001.48	1825.80	1673.37	1519.21	1413.29	1321.14
315.0	2601.72	2292.56	2080.71	1718.06	1718.06	1597.15	1496.31	1394.00	1323.81
360.0	3074.51	2784.29	2528.52	2302.89	2054.01	1699.55	1699.55	1581.13	1482.01
C/ γ (°)	27.0	28.0	29.0	30.0	31.0	32.0	33.0	34.0	35.0
0.0	1376.69	1306.50	1249.32	1192.40	1154.07	1120.57	1089.40	1045.56	968.66
45.0	1524.38	1411.57	1339.23	1278.94	1232.44	1181.63	1148.91	1117.04	1061.93
90.0	1324.33	1247.08	1186.37	1135.30	1084.58	1050.30	1016.20	955.31	891.93
135.0	1477.88	1373.67	1305.64	1251.39	1204.88	1165.27	1122.21	1086.04	1030.92
180.0	1305.64	1246.22	1185.08	1143.74	1110.15	1080.01	1024.90	961.17	887.97
225.0	1230.03	1181.89	1132.89	1098.96	1065.37	1003.37	938.60	863.85	782.21
270.0	1246.22	1169.57	1119.63	1073.98	1030.92	1000.78	945.67	883.66	816.49
315.0	1265.68	1203.07	1159.58	1122.29	1080.96	1034.28	970.81	899.08	799.26
360.0	1376.69	1306.50	1249.32	1192.40	1154.07	1120.57	1089.40	1045.56	968.66
C/ γ (°)	36.0	37.0	38.0	39.0	40.0	41.0	42.0	43.0	44.0
0.0	895.46	815.20	728.91	616.78	528.77	419.31	333.62	252.50	162.25
45.0	999.06	924.14	824.24	732.95	639.08	521.10	451.35	451.35	249.49
90.0	819.07	721.50	637.71	552.71	447.47	369.62	297.11	228.82	146.66
135.0	939.64	861.27	776.87	689.03	577.08	492.68	449.62	449.62	221.58
180.0	807.02	696.78	614.97	529.71	443.60	443.60	247.93	175.51	99.21
225.0	672.07	580.35	491.56	382.02	298.23	222.44	155.62	89.13	57.79
270.0	719.17	636.50	556.41	476.32	436.71	436.71	228.39	164.83	100.67
315.0	714.01	628.15	544.53	440.50	360.58	261.89	190.06	127.02	68.64
360.0	895.46	815.20	728.91	616.78	528.77	419.31	333.62	252.50	162.25

Intensity data(cd)

C/ γ (°)	45.0	46.0	47.0	48.0	49.0	50.0	51.0	52.0	53.0
0.0	102.74	61.06	39.27	34.53	29.28	24.80	20.84	19.72	18.69
45.0	161.04	101.10	60.89	40.65	34.02	28.68	24.11	20.24	19.03
90.0	95.16	60.97	46.33	39.53	34.10	28.42	25.40	23.77	22.13
135.0	152.60	82.85	49.60	39.01	32.81	28.07	24.20	22.05	21.10
180.0	58.22	38.84	34.36	29.11	24.63	20.84	19.55	18.60	17.91
225.0	44.78	39.01	34.28	28.85	26.27	25.23	24.37	23.17	22.30
270.0	67.00	51.07	44.01	38.67	34.28	29.71	27.56	25.75	23.77
315.0	46.59	41.34	35.91	29.71	25.92	24.29	23.42	21.96	20.93
360.0	102.74	61.06	39.27	34.53	29.28	24.80	20.84	19.72	18.69
C/ γ (°)	54.0	55.0	56.0	57.0	58.0	59.0	60.0	61.0	62.0
0.0	17.74	16.88	16.19	15.50	14.81	14.30	13.52	13.09	12.83
45.0	18.17	17.57	17.22	16.79	16.28	16.10	16.02	15.76	15.50
90.0	21.01	20.24	19.29	18.60	18.00	17.22	16.53	15.85	15.42
135.0	20.32	19.46	18.77	18.00	17.22	16.45	15.42	14.98	14.30
180.0	16.97	16.28	15.42	14.64	14.12	13.43	13.00	12.57	12.23
225.0	21.44	20.58	19.63	18.77	17.91	17.14	16.28	15.59	15.07
270.0	22.65	21.53	20.67	19.55	18.60	17.91	17.05	16.10	15.50
315.0	20.07	18.77	17.83	16.97	15.93	15.24	14.55	13.78	13.35
360.0	17.74	16.88	16.19	15.50	14.81	14.30	13.52	13.09	12.83
C/ γ (°)	63.0	64.0	65.0	66.0	67.0	68.0	69.0	70.0	71.0
0.0	12.40	11.97	11.71	11.45	11.11	10.76	10.33	10.08	9.90
45.0	15.24	14.90	14.55	14.04	13.61	12.92	12.57	12.06	11.45
90.0	15.07	14.38	13.95	13.43	12.92	12.49	12.06	11.54	11.20
135.0	13.69	13.26	12.92	12.49	12.06	11.71	11.28	10.94	10.51
180.0	11.88	11.54	11.28	10.94	10.59	10.25	9.99	9.73	9.56
225.0	14.64	14.04	13.26	12.83	12.31	11.63	11.11	10.68	10.25
270.0	15.07	14.47	14.04	13.35	12.83	12.23	11.71	11.11	10.76
315.0	13.00	12.57	11.88	11.54	11.11	10.51	10.16	9.90	9.65
360.0	12.40	11.97	11.71	11.45	11.11	10.76	10.33	10.08	9.90
C/ γ (°)	72.0	73.0	74.0	75.0	76.0	77.0	78.0	79.0	80.0
0.0	9.65	9.39	9.21	8.96	8.70	8.53	8.35	8.27	8.10
45.0	11.02	10.59	10.08	9.73	9.30	8.96	8.53	8.35	8.27
90.0	10.76	10.42	9.99	9.65	9.39	9.13	8.96	8.87	8.78
135.0	10.25	9.90	9.65	9.39	9.04	8.70	8.44	8.35	8.27
180.0	9.39	9.13	8.96	8.78	8.53	8.35	8.27	8.10	7.92
225.0	9.82	9.30	8.87	8.61	8.44	8.27	8.10	8.10	7.92
270.0	10.33	9.99	9.65	9.30	9.04	8.87	8.78	8.70	8.44
315.0	9.30	9.04	8.70	8.53	8.35	8.18	8.10	8.01	7.92
360.0	9.65	9.39	9.21	8.96	8.70	8.53	8.35	8.27	8.10
C/ γ (°)	81.0	82.0	83.0	84.0	85.0	86.0	87.0	88.0	89.0
0.0	8.01	7.84	7.75	7.66	7.58	7.49	7.41	7.32	7.23
45.0	8.10	7.92	7.84	7.75	7.58	7.49	7.41	7.32	7.15
90.0	8.61	8.53	8.35	8.18	8.01	7.66	7.41	7.15	6.98
135.0	8.01	8.01	7.84	7.75	7.66	7.66	7.41	7.23	7.15
180.0	7.84	7.75	7.75	7.66	7.58	7.32	7.23	7.15	6.80
225.0	7.75	7.66	7.58	7.49	7.32	7.15	6.98	6.80	6.80
270.0	8.35	8.27	8.01	7.92	7.58	7.41	7.15	6.98	6.89
315.0	7.84	7.66	7.58	7.41	7.41	7.23	7.15	6.89	6.80
360.0	8.01	7.84	7.75	7.66	7.58	7.49	7.41	7.32	7.23

Intensity data(cd)

C/ $\gamma(^{\circ})$	90.0
0.0	7.06
45.0	7.06
90.0	6.89
135.0	6.89
180.0	6.80
225.0	6.80
270.0	6.89
315.0	6.80
360.0	7.06